




THREE-PHASE HYBRID INVERTER

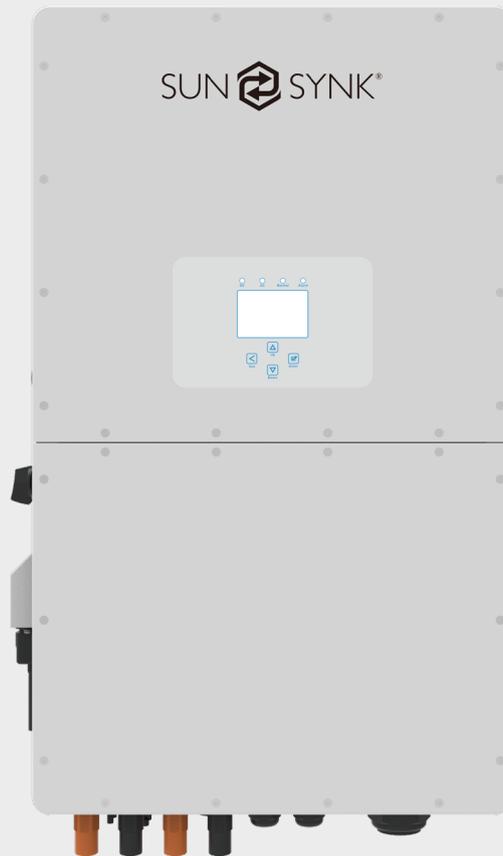

DATASHEET

SUNSYNK-29.9K-SG01HP3-EU-BM3
SUNSYNK-30K-SG01HP3-EU-BM3
SUNSYNK-35K-SG01HP3-EU-BM3
SUNSYNK-40K-SG01HP3-EU-BM4
SUNSYNK-50K-SG01HP3-EU-BM4

www.sunsynk.com
sales@sunsynk.com
customerservices@sunsynk.com

v.18 (26/08/25)

 **PLEASE RETAIN FOR
FUTURE REFERENCE**

Model	SUNSYNK-29.9K-SG01HP3-EU-BM3	SUNSYNK-30K-SG01HP3-EU-BM3	SUNSYNK-35K-SG01HP3-EU-BM3	SUNSYNK-40K-SG01HP3-EU-BM4	SUNSYNK-50K-SG01HP3-EU-BM4
Battery Input Data					
Battery Type	Lithium-ion				
Battery Voltage	160~800V				
Max. Charging Current	50+50A				
Max. Discharging Current	50+50A				
Max. Charging/Discharging Power	29900W	33000W	38500W	44000W	55000W
Charging Strategy for Li-Ion Battery	Self-Adaptation to BMS				
Number of Battery Input	2				
PV String Input Data¹					
Max. PV Input Power	38870W	39000W	45500W	52000W	65000W
Max. PV Input Voltage	1000V				
Start-up Voltage	180V				
MPPT Range	150~850V				
Full Load MPPT Voltage Range	360-850V		420-850	360-850V	450-850V
Rated PV Input Voltage	600V				
Max. Input Short Circuit Current	55+55+55A			55+55+55+55A	
Max. Operating PV Input Current	36+36+36A			36+36+36+36A	
No. of MPPT/No. of String per MPPT	3/2+2+2			4/2+2+2+2	
Max. Inverter Backfeed Current To the Array	0				
AC Output Data					
Rated AC Input/Output Active Power	29900W	30000W	35000W	40000W	50000W
Max. AC Input/Output Apparent Power	29900W	33000W	38500W	44000W	55000W
Peak Power (off-grid)	1.5 times rated power, 10sec				
Rated AC Input/Output Current	45.4/43.4A	45.5/43.5A	53.1/50.8A	60.7/58.0A	75.8/72.5A
Max. AC Input/Output Current	45.4/43.4A	50/47.9A	58.4/55.8A	66.7/63.8A	83.4/79.8A
Max. Continuous AC Passthrough (grid to load)	200A				
Max Three Phase Unblanaced Output Current	60A			70A	83.4A
Rated Input/Output Voltage Range	220/380V, 230/400V 0.85Un-1.1Un				
Grid Connection Form	3L+N+PE				
Rated Input/Output Grid Frequency	50Hz/45-55Hz, 60Hz/55-65Hz				
Power Factor Adjustment Range	0.8 leading to 0.8lagging				
Total Current Harmonic Distortion THDi	<3% (of nominal power)				
DC Injection Current	<0.5% In				
Efficiency					
Max. Efficiency	97.60%				
Euro Efficiency	97.00%				
MPPT Efficiency	>99.00%				
Communication					
Communication Interface	RS485/RS232/CAN				
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)				
Protection					
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection, DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring, Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch, Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level				
Surge Protection Level	TYPE II (DC), TYPE II (AC)				
Certifications and Standards					
Grid Connection Standard	EN 50549-1, AS-NZS 4777.2, NRS 097-2-1; Additional connections available upon request				
EMC/Safety Standards	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

General Data	
Operating Temperature Range	-40 to +60°C, >45°C Derating
Permissible Altitude Humidity	0~100%
Permissible Altitude	2000m
Noise	<65 dB
Ingress Protection (IP)	IP65
Protective Class	Class I
Inverter Topolgy	Non-Isolated
Over Voltage Category	OVC II (DC), OVC III (AC)
Size	527*894*294mm
Weight	80kg
Warranty	5 years (10 when installed with a Sunsynk battery)
Type of Cooling	Intelligent Cooling
Pollution degree	PD2 (Inside) PD3 (Outside)
Manufacturer Country	China

[1] The inverter's minimum operating voltage (180V) refers to the threshold at which the inverter powers on, while the MPPT voltage range (150V–850V) defines the range within which the MPPTs actively track and optimize power. These values are not the same and serve different operational purposes.



NOTICE

Safe Transport and Handling of the Inverter

When transporting the equipment, always use its original packaging and keep it intact as a complete unit. Store the product in a dry environment, avoiding direct sunlight, and maintain a temperature range between -40°C and 60°C. As the equipment can be quite heavy, always consider its total weight when moving, transporting, or installing it, ensuring that the installation site has adequate load-bearing capacity. Transporting and installing the inverter should only be carried out by qualified personnel.



Contact Us

Call +44 151 832 4300 **Email** sales@sunsynk.com **Website** www.sunsynk.com

Address

- HK** Room 702-704, 7/F Texwood Plaza, 6 How Ming Street, Kwun Tong, Kowloon, Hong Kong
- UK** Sunsynk UK Ltd, 17 Turnstone Business Park, Mulberry Avenue, Widnes, Cheshire, WA8 0WN
- SA** Unit 2, 3 & 4, 80 Highview Blvd, Ferndale, Randburg, 2160, South Africa
- NL** Sunsynk NL BV, Henri Wijnmalenweg 8, 5657 EP Eindhoven, Netherlands
- AU** Level 1, 982-988 Wellington Street, West Perth WA 6005, Australia
- ES** Tafetana, 32 P.I. Las Andoriñas 38639 Las Chafiras Santa Cruz de Tenerife
- US** 100 S. Ashley Drive, Suite 600, Tampa, Florida, 33602, United States of America