

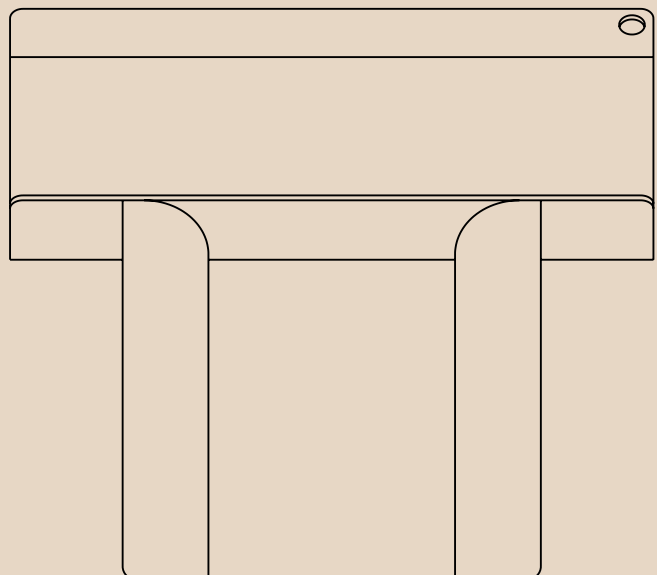
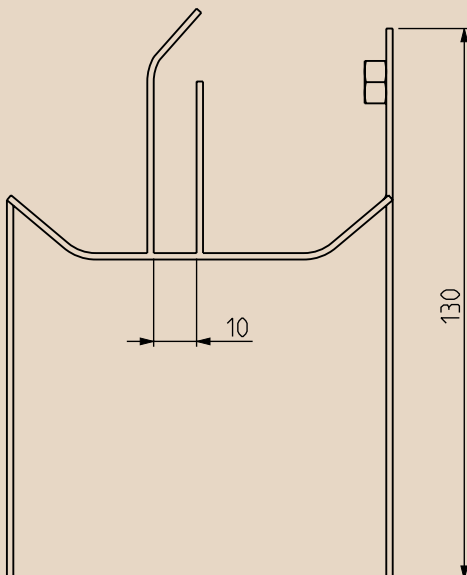


# Stago Fibre-Optic Duct System

Technical Guide 2025

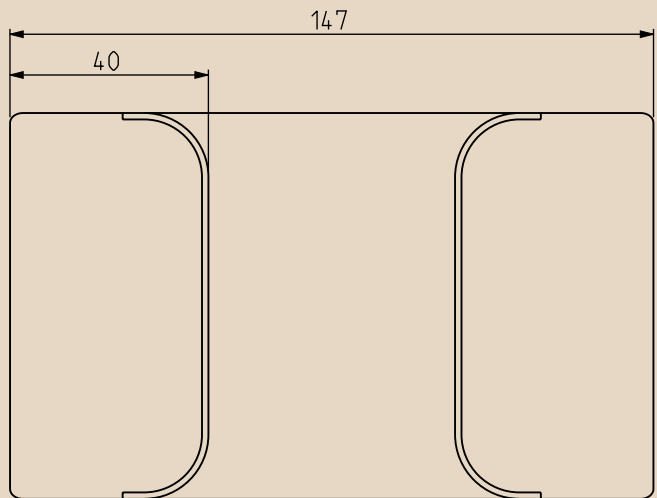

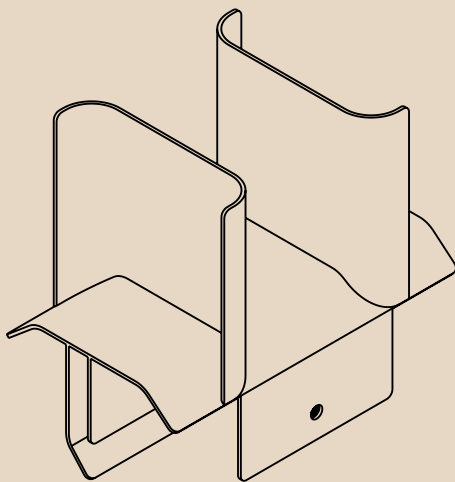

Creating clever, uplifting solutions, together with our clients for almost 100 years. Reimagined in June 2021 – for the coming century.

Looking ahead to the next century, we are reinventing ourselves – as Wibe Group – bringing together four of the world's leading cable management brands as a new independent company to offer a complete, innovative range of cable ladders, cable trays and mesh trays – for applications ranging from commercial buildings to extreme demanding industrial environments.





# Content

|                           |    |
|---------------------------|----|
| Introduction              | 7  |
| Technical characteristics | 13 |
| Mounting Guide            | 25 |
| Customization handbook    | 29 |
| Safety recommendations    | 33 |



# A dynamic and durable carrier

The “White space” is the heart of the Data Centre. The hub where thousands of tiny fibre optic cables connect at the speed of light. Constantly On and evolving in pace with increasing demands, impersonating the term “living being”.

The Stago Fibre-Optic Ducts are the carriers of all heavy traffic in the Data Centre. Stable and strong, they are ready to perform. And once mounted, they will last and always be ready to evolve for new, unpredictable demands.

## The evolving system


Quick and easy to install, made for continuous development – always avoiding downtime. Swiftly adaptable to changing needs thanks to modular, tool-less accessories. A true “plug & play” concept.

## With efficiency in mind

A sturdy and robust steel system that allows long support distances without sagging, thus saving mounting time. And the consoles with one side open for cable management saves cabling and maintenance time. By suiting all ducts, ladders and busbars, the support system is both rational and economical.



The Stago Fibre-Optic Duct is all metal and carries a higher load compared to non-metal systems. This means longer spans, minimised support, no sagging – and an overall more efficient and easily expandable installation.

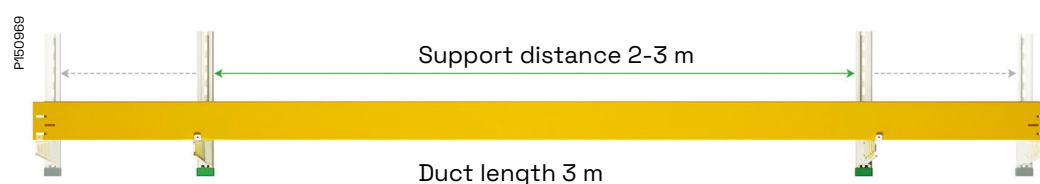

## Ideal rail lengths



The 3-m duct is optimised for fast and efficient installation. Add smart modular covers and support distances up to 3 m and you have a high-speed installation.

## Suitable dimensions


Stago FO ducts are available in heights of 60 or 110 mm, and widths of 100, 200, or 300 mm. All with the same smooth and soft shape. Other sizes are available on request.


## More than yellow

Standard colour of the ducting is yellow, RAL 1023. Other colours can be delivered on special order.

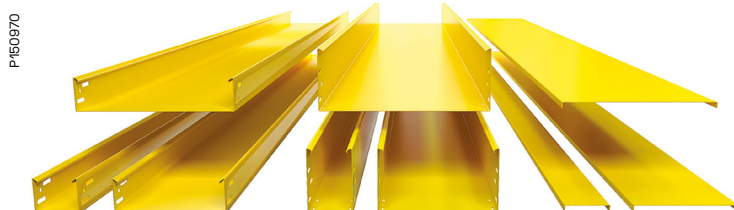

1. Fibre-Optic Duct
2. Duct cover
3. Separation wall
4. Branching piece
5. Internal riser
6. External riser
7. 90° Bend
8. T-piece
9. X-piece
10. End piece
11. Drop-off UDF
12. Patch panel bracket set
13. RJ45 bracket
14. Hinge coupler
15. External coupler
16. Bolt set (M6)
17. Cover clamp
18. Internal Coupler Unilock

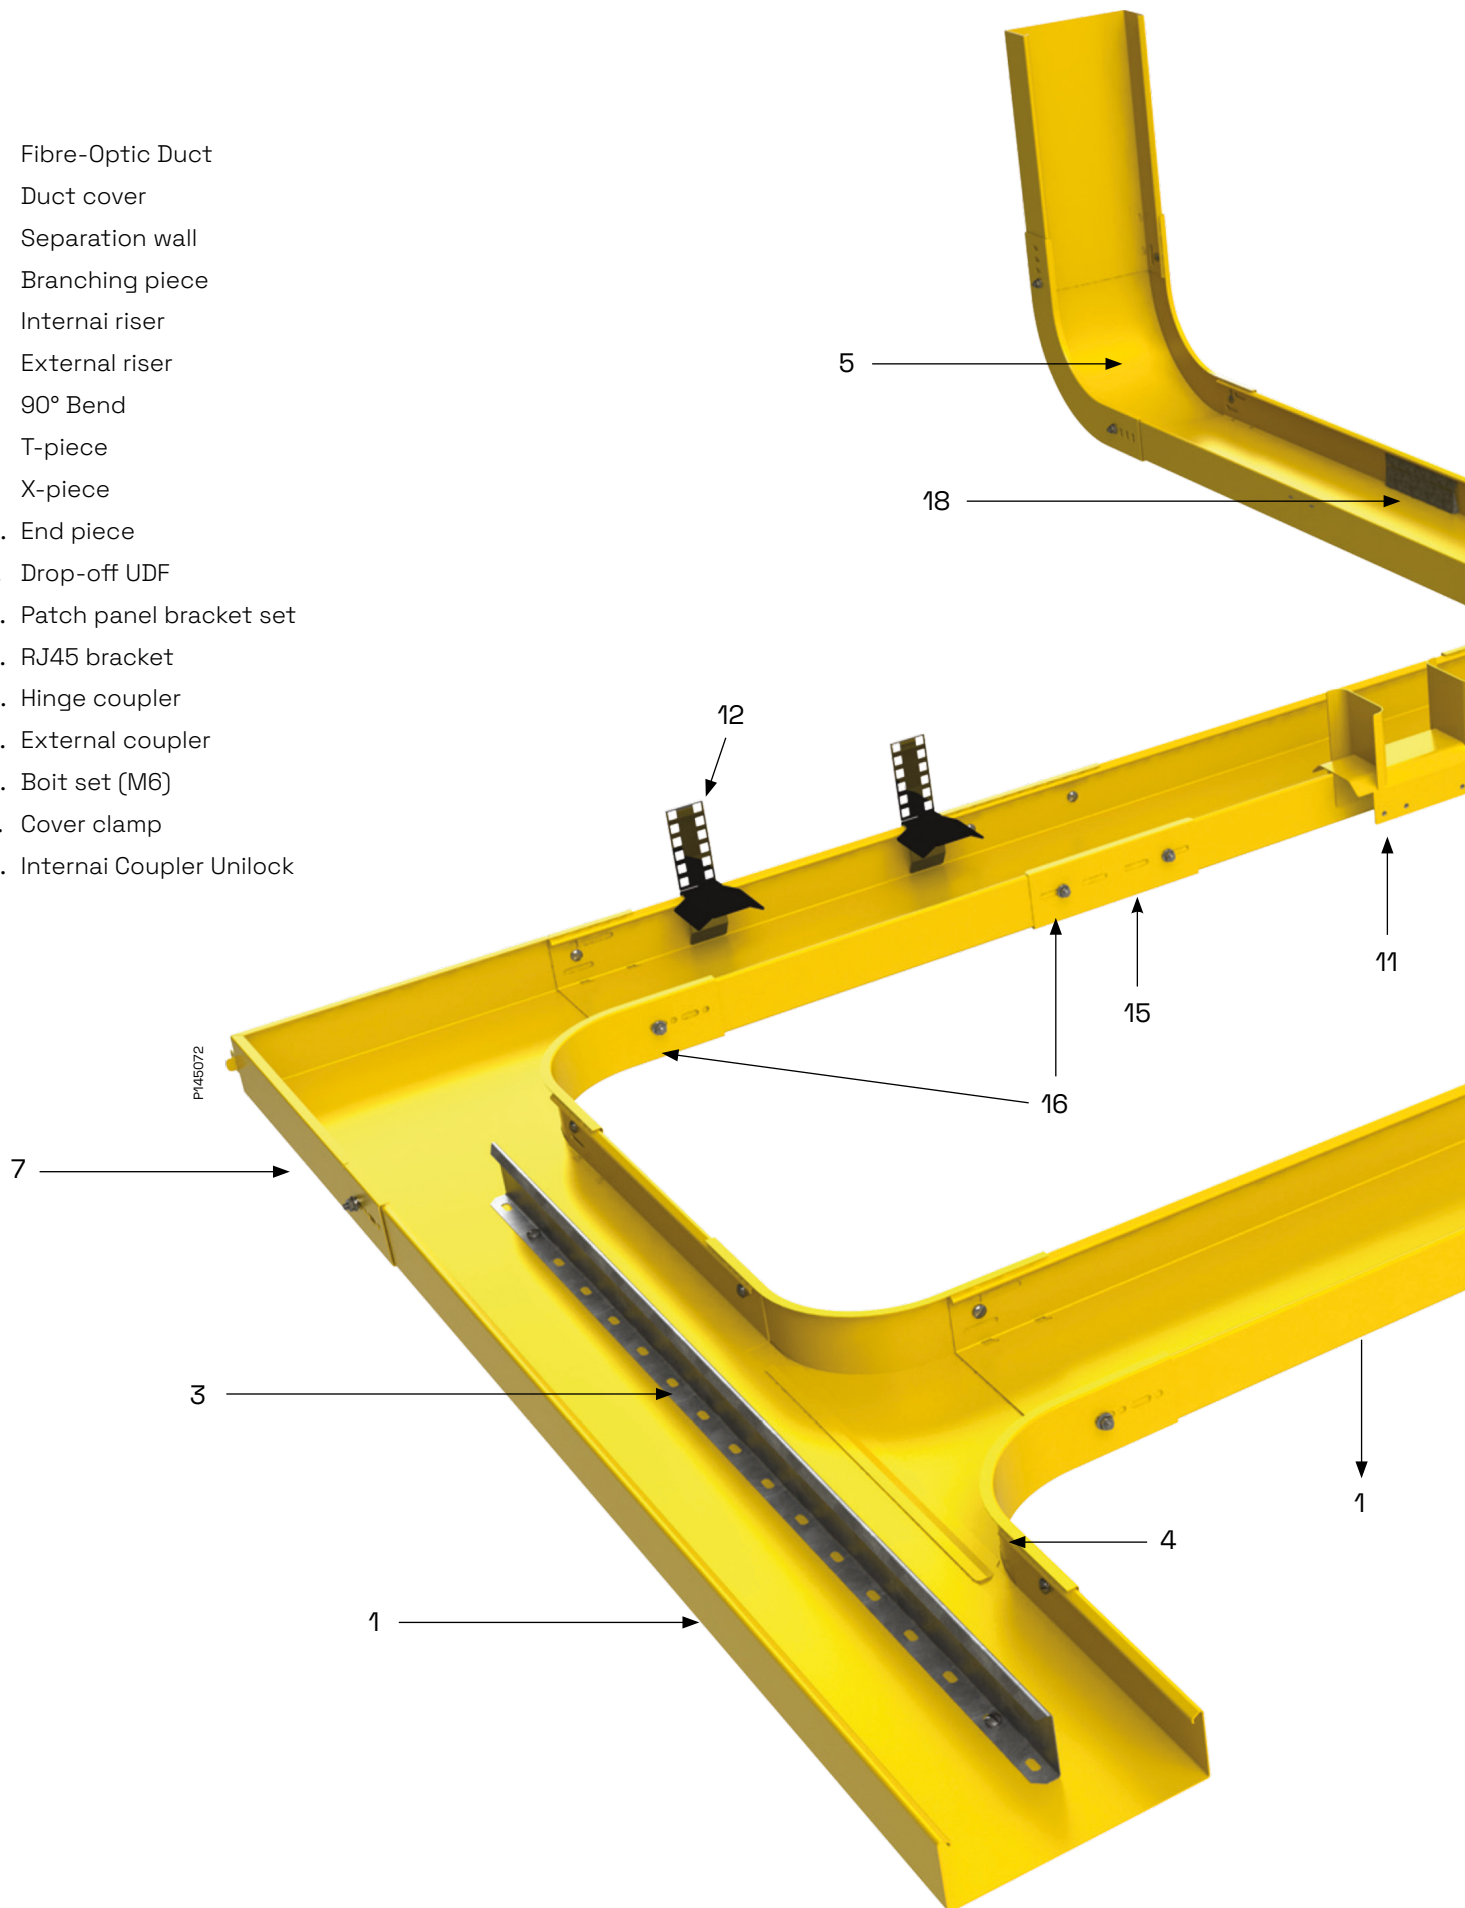

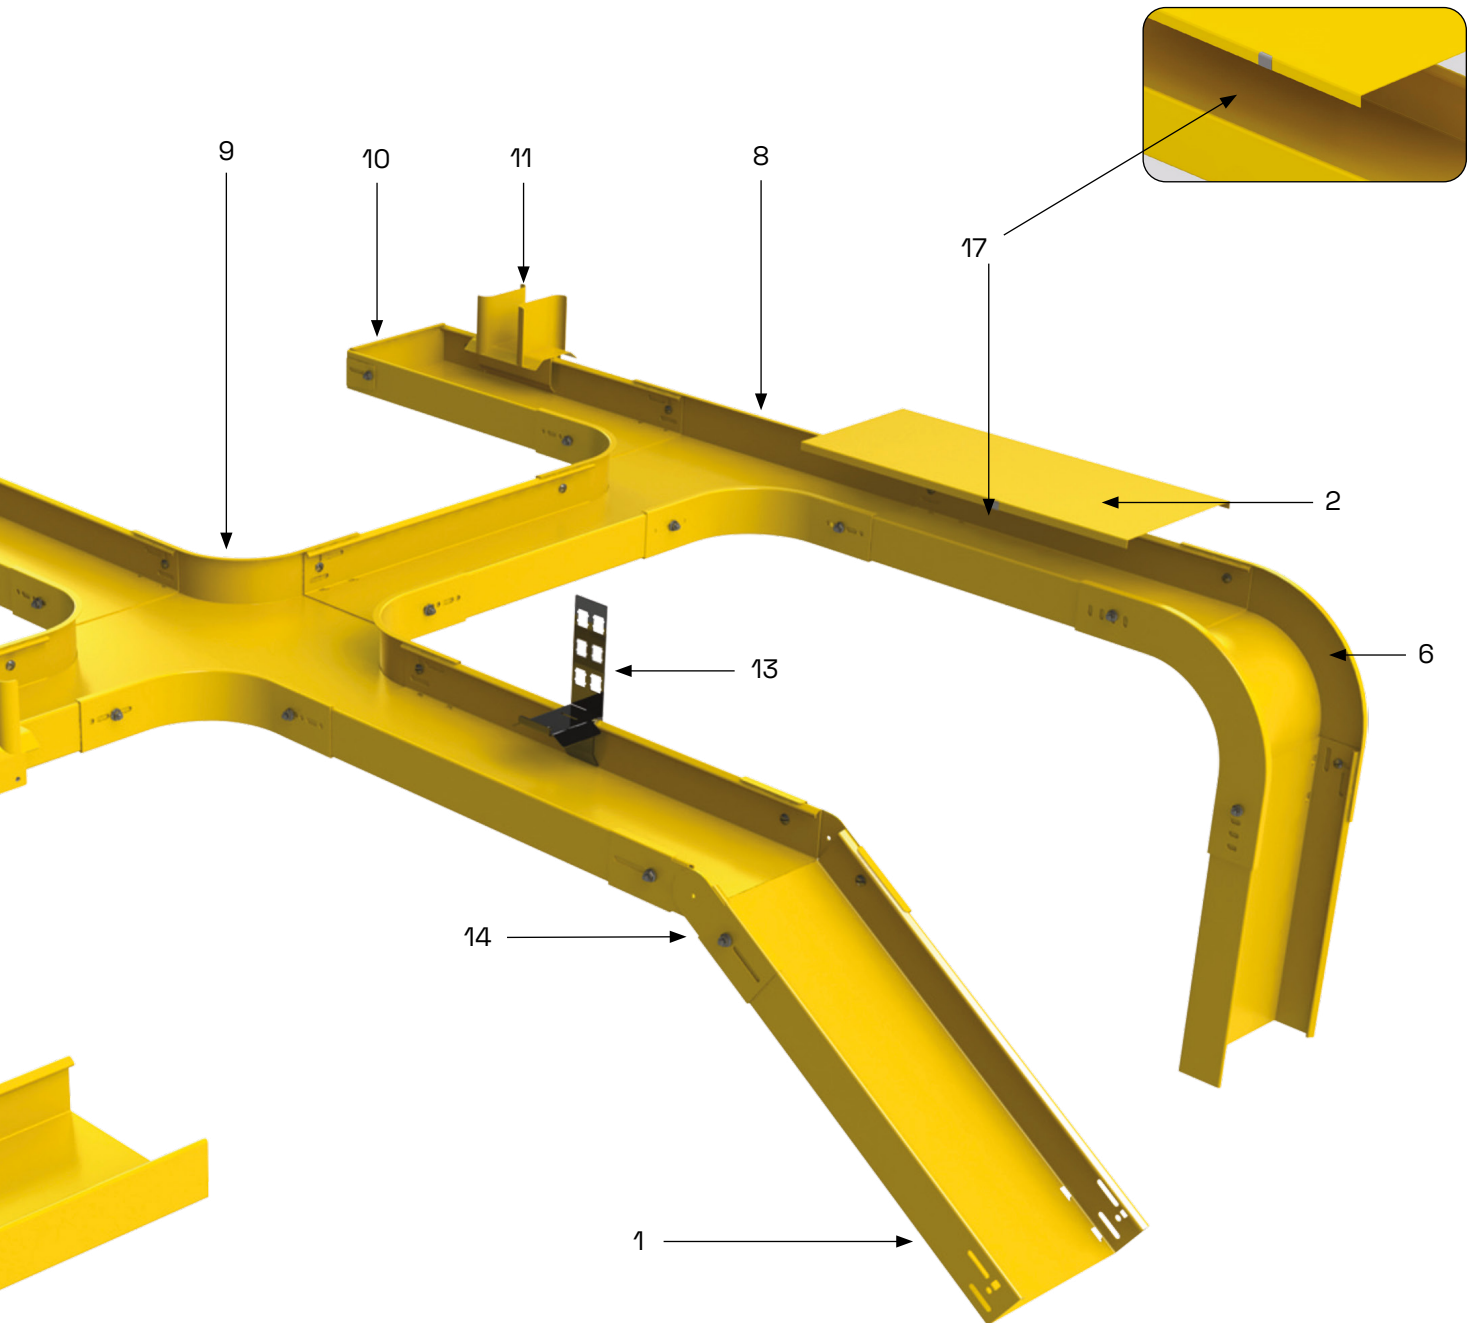



### High-performance management

Every component of the Stago FO Duct range is designed and developed with the same passionate care about both the fibre and the management. No matter how complex the configuration is, our ambition is that you do not have to worry about what is already installed, because it just works.

## INTRODUCTION

1. Claw
2. Ceiling bracket 2F
3. Bracket 50i
4. C bracket
5. Omega L
6. Omega C
7. Suspension beam
8. Threaded rod

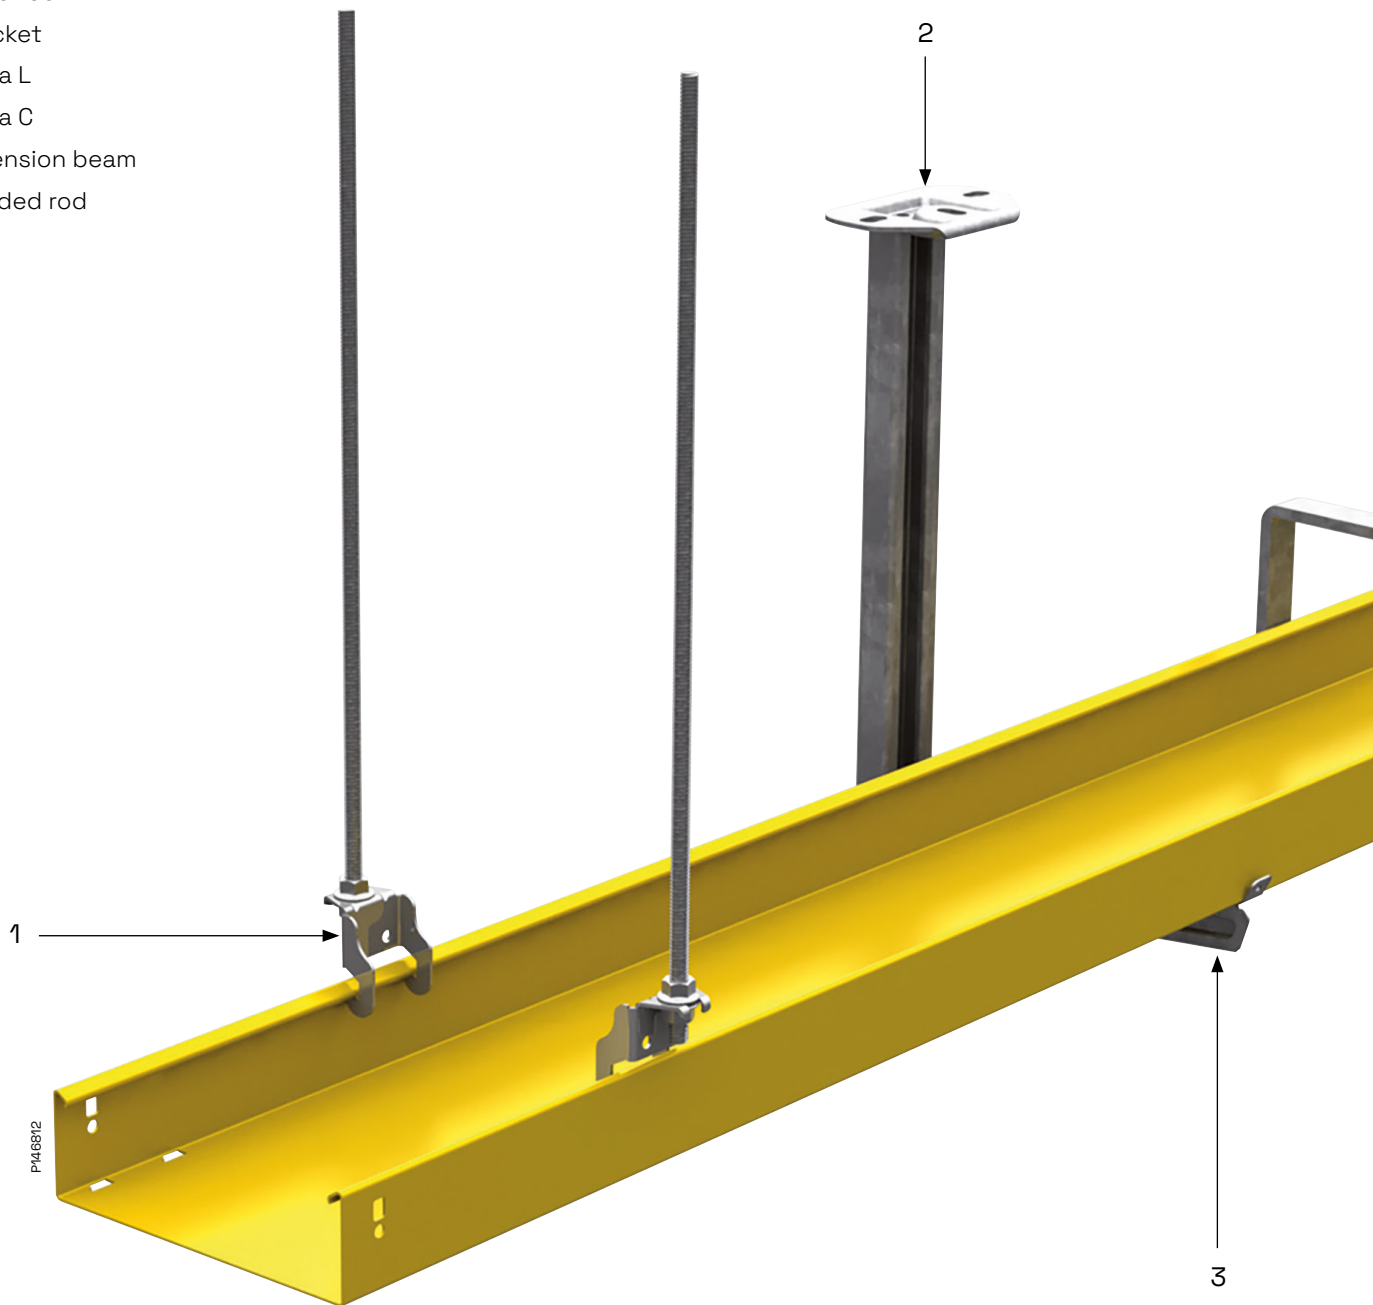

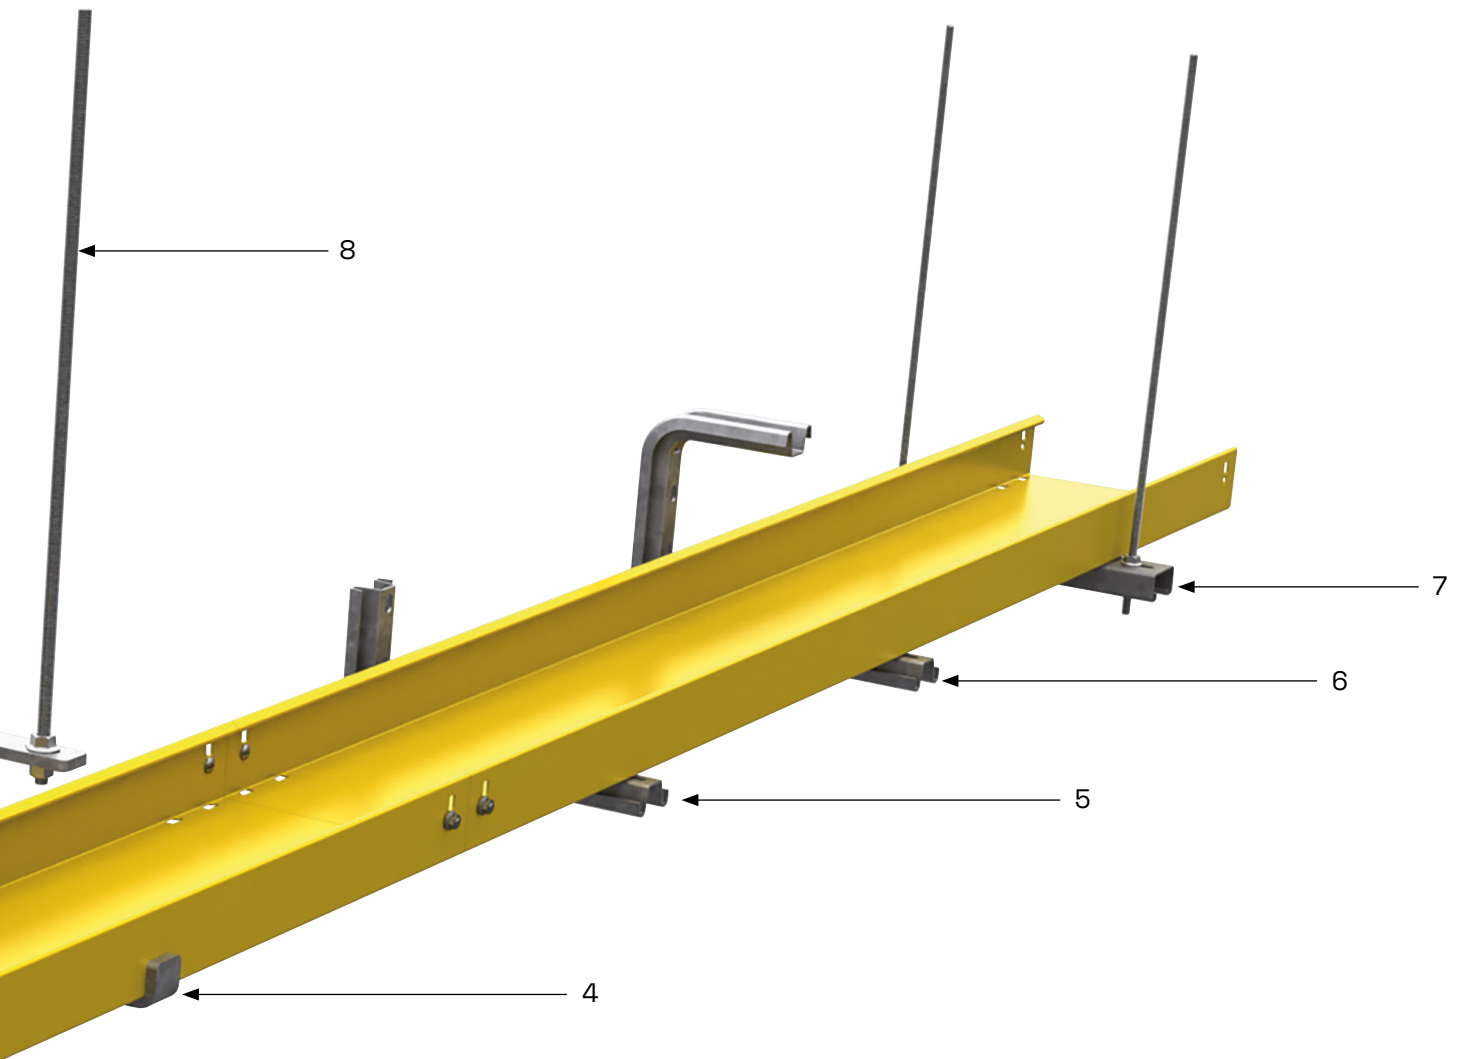

### Optimized support system

Few supports needed to build complex configurations. The single pendant support with robust consoles leaves one side easy open, allowing fast and easy cable management. Suits all types of cable support and busbars.





# Technical characteristics

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>Standards and Directives</b>                   | <b>14</b> |
| Management system -<br>Quality and Environment    | 14        |
| CE-marking of products                            | 14        |
| Low voltage directive 2014/35                     | 14        |
| EMC directive 2004/108/EC                         | 14        |
| <b>Stago Fibre-Optic Duct</b>                     | <b>15</b> |
| Bending radius and Cable filling capacity         | 15        |
| Support working Loads and<br>Span recommendations | 17        |
| Dimensions                                        | 18        |

## Standards and Directives



IEC 61537 specifies requirements and tests for cable tray, cable ladder and cable ducting systems intended for the support and accommodation of cables and possibly other electrical equipment in electrical and/or communication systems installation.

The standard IEC 61537 establishes that for Cable Ducts with electrical continuity characteristics (metal), this continuity should be guaranteed by means of an equipotential connection and one or several connections to earth in accordance with the use of the Cable Duct system.

To guarantee a safe installation, Wibe Group recommends a proper earthing of all elements that make up the system (section and accessories), using the accessories designed specifically for this purpose.



### Management system - Quality and Environment

Wibe Group has a third-party certified management system for quality and environment system for quality and environment in accordance with ISO 9001:2015 to ISO 14001:2015 and ISO45001:2018.



### CE-marking of products

The CE-marking of products is placed on the product or on the packaging according to Low Voltage Directive 2014/35/EU, applicable to Wibe Group Cable Support System.



### Low voltage directive 2014/35


Wibe Group fulfills the demands according to the harmonized standard EN 61537 Edition 2:2007.

### Electromagnetic compatibility (EMC)

Cable support systems do not emit electromagnetic fields and are not adversely affected by them when used for their intended purpose.

## Stago Fibre-Optic Duct



### Bending Radius and Cable Filling Capacity

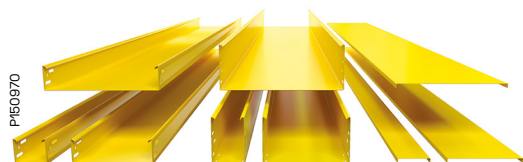

- Stago fibre-optic duct offer is now available in:
- System height: 60 mm and 110 mm
- Widths: 100 mm, 200 mm and 300 mm
- Length: 3 m
- The standard cable ducts are painted in yellow (RAL1023)
- Other sizes and colours available on request


### Bending radius

In fibre-optic installations fibre stress through bending must be limited or eliminated completely. In respect of this limitation a specific design of round form pieces provide a minimum of 50mm bend radius for fibre-optic cables.

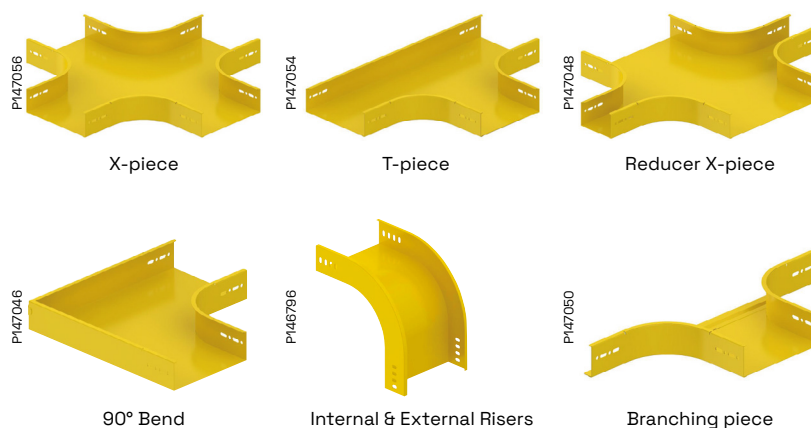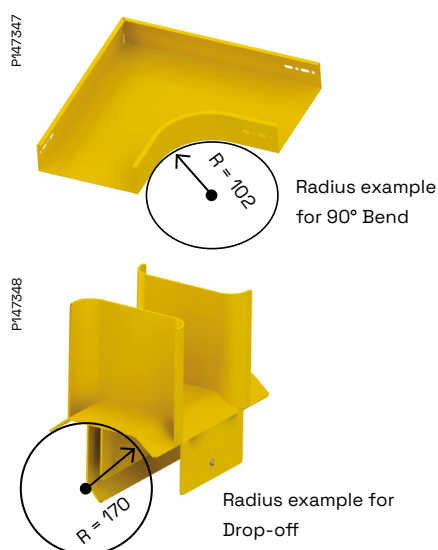

### Modular accessories

For enhanced protection of fibre-optic cables, modular accessories such as drop-off pieces were designed in respect of a minimum of 50 mm bend radius.

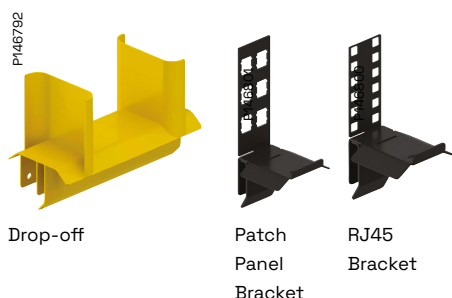

### Cable Filling Capacity

The figures in the table below are calculated considering a 50% cable loading factor.







| Cable Duct<br>Cat. No. | Dimension<br>H x W (mm) | Cable Filling Capacity<br>(Load factor of 50%) |        |      |      |
|------------------------|-------------------------|------------------------------------------------|--------|------|------|
|                        |                         | Optical Fibre                                  |        |      |      |
|                        |                         | Ø1.2mm                                         | Ø1.6mm | Ø2mm | Ø3mm |
| CSU7600104FS123        | 60 x 100                | 1653                                           | 1413   | 905  | 402  |
| CSU7600204FS123        | 60 x 200                | 4218                                           | 2856   | 1828 | 812  |
| CSU7600304FS123        | 60 x 300                | 6782                                           | 4298   | 2751 | 1223 |
| CSU7100104FS123        | 110 x 100               | 3820                                           | 2632   | 1684 | 749  |
| CSU7100204FS123        | 110 x 200               | 8594                                           | 5318   | 3403 | 1513 |
| CSU7100304FS123        | 110 x 300               | 13369                                          | 8004   | 5122 | 2277 |

Note: The figures in the table represent the number of cables.

# Stago Fibre-Optic Duct


## Safe Working Load

The Safe Working Load values correspond to an evenly distributed load that can be applied with guaranteed safety in the normal conditions of use of the ducts, according to the results obtained from the tests made in accordance with the criteria of the standard for cable trays. The tests were carried out in accordance with IEC 61537 standard for the type 1.

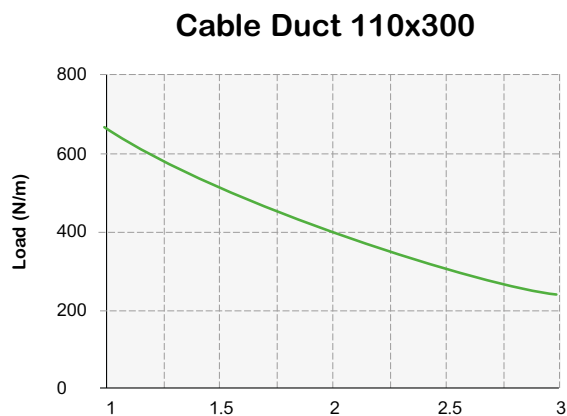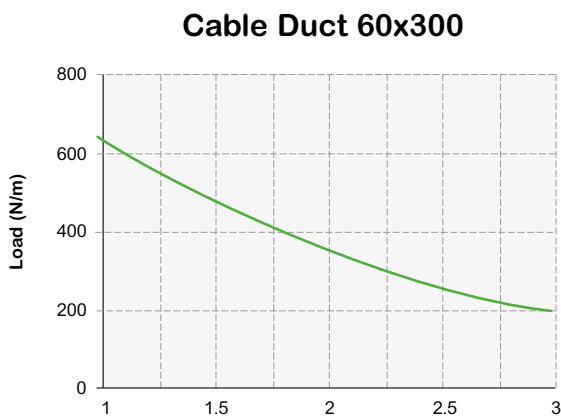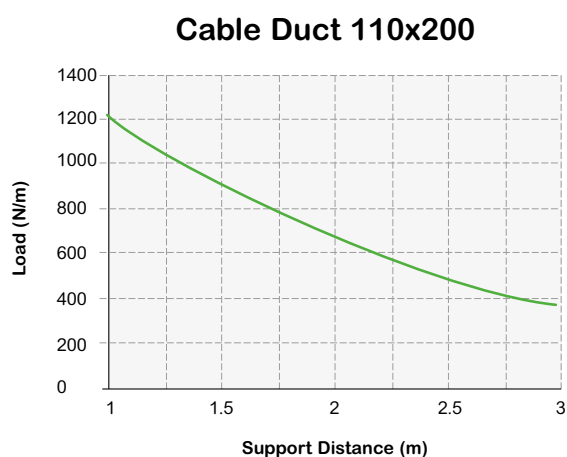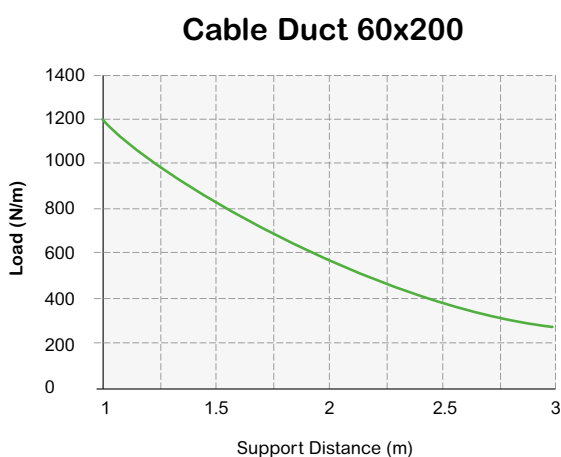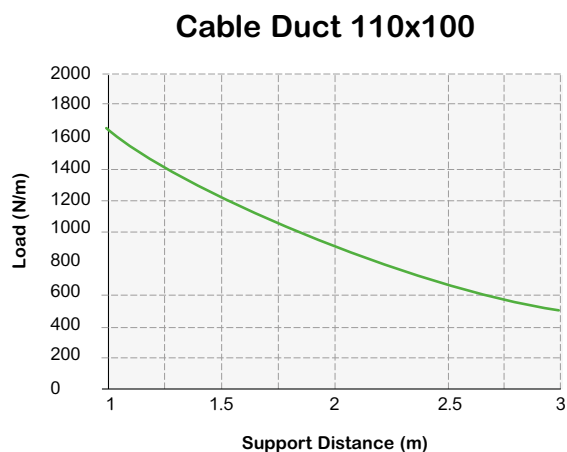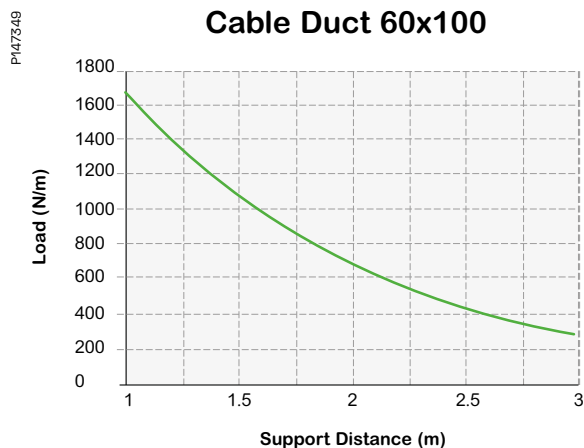

Stago Fibre-Optic Duct

Support working Loads and Span recommendations

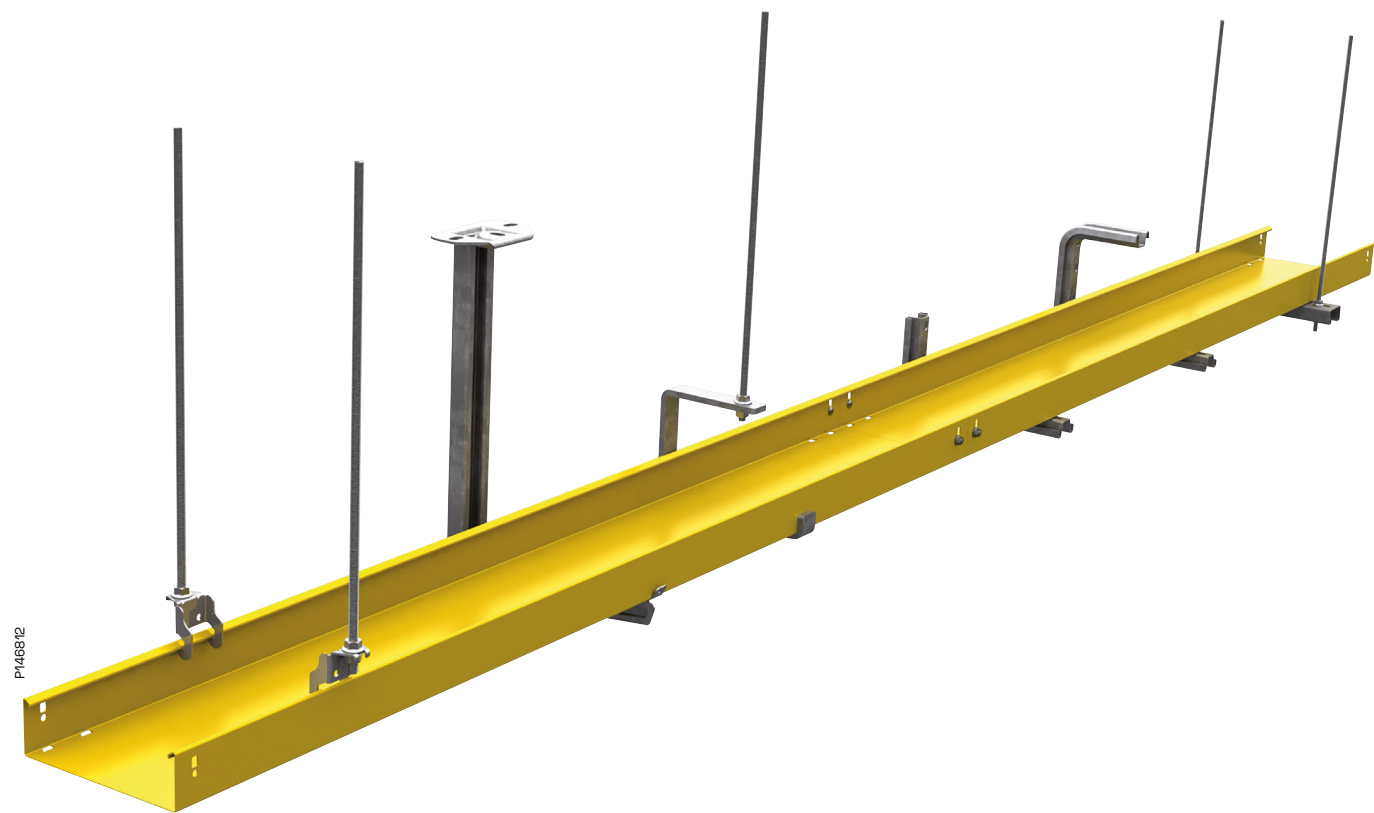


| Support Width<br>(mm) | Supports SWL (Kg)              |           |                    |                          |                    |
|-----------------------|--------------------------------|-----------|--------------------|--------------------------|--------------------|
|                       | Pendant 2F +<br>Cantilever 50i | C-Bracket | Omega Wall Bracket | Omega Ceiling<br>Bracket | Suspension<br>Beam |
| 100                   | 230.2                          | 20.9      | 198                | 123                      | 200                |
| 200                   | 160.4                          | 72.6      | 100                | 90                       | 200                |
| 300                   | 123.1                          | 75.6      | 78                 | 75                       | 200                |

| Maximum recommended Span (considering Fibre-Optic cables) |                                |           |                    |                          |                    |
|-----------------------------------------------------------|--------------------------------|-----------|--------------------|--------------------------|--------------------|
| CRITERIA: Minimum of<br>MPL/SWL                           | Pendant 2F +<br>Cantilever 50i | C-Bracket | Omega Wall Bracket | Omega Ceiling<br>Bracket | Suspension<br>Beam |
| 60x100                                                    | 3                              | 3         | 3                  | 3                        | 3                  |
| 60x200                                                    | 3                              | 3         | 3                  | 3                        | 3                  |
| 60x300                                                    | 3                              | 3         | 3                  | 3                        | 3                  |
| 110x100                                                   | 3                              | 3         | 3                  | 3                        | 3                  |
| 110x200                                                   | 3                              | 3         | 3                  | 3                        | 3                  |
| 110x300                                                   | 3                              | 3         | 3                  | 3                        | 3                  |

# Stago Fibre-Optic Duct


## Dimensions

### Bend 90°




| Cat. No.         | Dimensions |     |     |       | Weight |
|------------------|------------|-----|-----|-------|--------|
|                  | H          | W   | R   | A     | Kg     |
| CSU08616109FS123 | 60         | 100 | 100 | 304.5 | 0.98   |
| CSU08616209FS123 | 60         | 200 | 100 | 404.5 | 1.65   |
| CSU08616309FS123 | 60         | 300 | 100 | 505.5 | 2.47   |
| CSU08611109FS123 | 110        | 100 | 100 | 304.5 | 1.35   |
| CSU08611209FS123 | 110        | 200 | 100 | 404.5 | 2.09   |
| CSU08611309FS123 | 110        | 300 | 100 | 505.5 | 2.99   |

### X-piece



| Cat. No.         | Dimensions |     |     |       |       | Weight |
|------------------|------------|-----|-----|-------|-------|--------|
|                  | H          | W   | R   | A     | B     | Kg     |
| CSU08636109FS123 | 60         | 100 | 100 | 505.5 | 100.5 | 1.70   |
| CSU08636209FS123 | 60         | 200 | 100 | 605.5 | 100.5 | 2.57   |
| CSU08636309FS123 | 60         | 300 | 100 | 705.5 | 100.5 | 3.60   |
| CSU08631109FS123 | 110        | 100 | 100 | 505.5 | 100.5 | 2.24   |
| CSU08631209FS123 | 110        | 200 | 100 | 605.5 | 100.5 | 3.11   |
| CSU08631309FS123 | 110        | 300 | 100 | 705.5 | 100.5 | 4.14   |

### Universal Branching Piece




| Cat. No.         | Dimensions |     |     |       |     | Weight |
|------------------|------------|-----|-----|-------|-----|--------|
|                  | H          | W   | R   | A     | B   | Kg     |
| CSU08716109FS123 | 60         | 100 | 100 | 505.5 | 224 | 0.77   |
| CSU08716209FS123 | 60         | 200 | 100 | 605.5 | 224 | 0.96   |
| CSU08716309FS123 | 60         | 300 | 100 | 705.5 | 224 | 1.16   |
| CSU08711109FS123 | 110        | 100 | 100 | 505.5 | 224 | 1.04   |
| CSU08711209FS123 | 110        | 200 | 100 | 605.5 | 224 | 1.23   |
| CSU08711309FS123 | 110        | 300 | 100 | 705.5 | 224 | 1.43   |

# Stago Fibre-Optic Duct


## Dimensions

### T-piece




| Cat. No.         | Dimensions |     |     |       |       | Weight |
|------------------|------------|-----|-----|-------|-------|--------|
|                  | H          | W   | R   | A     | B     | Kg     |
| CSU08626109FS123 | 60         | 100 | 100 | 304.5 | 505.5 | 1.32   |
| CSU08626209FS123 | 60         | 200 | 100 | 404.5 | 605.5 | 2.09   |
| CSU08626309FS123 | 60         | 300 | 100 | 505.5 | 705.5 | 3.02   |
| CSU08621109FS123 | 110        | 100 | 100 | 304.5 | 505.5 | 1.79   |
| CSU08621209FS123 | 110        | 200 | 100 | 404.5 | 605.5 | 2.59   |
| CSU08621309FS123 | 110        | 300 | 100 | 505.5 | 705.5 | 3.56   |

### Reducer X-piece



| Cat. No.           | Dimensions |     |     |       | Weight |
|--------------------|------------|-----|-----|-------|--------|
|                    | H          | W   | R   | A     | Kg     |
| CSU0863610309FS123 | 60         | 100 | 100 | 505.5 | 2.49   |
| CSU0863620309FS123 | 60         | 200 | 100 | 605.5 | 3.05   |
| CSU0863110309FS123 | 110        | 100 | 100 | 505.5 | 3.03   |
| CSU0863120309FS123 | 110        | 200 | 100 | 605.5 | 3.59   |

### Reducer




| Cat. No.          | Dimensions |     |     |     | Weight |
|-------------------|------------|-----|-----|-----|--------|
|                   | H          | W1  | W2  | A   | Kg     |
| CSU082610209FS123 | 60         | 100 | 200 | 286 | 0.73   |
| CSU082610309FS123 | 60         | 100 | 300 | 373 | 1.09   |
| CSU082620309FS123 | 60         | 200 | 300 | 286 | 0.95   |
| CSU082110209FS123 | 110        | 100 | 200 | 286 | 0.95   |
| CSU082110309FS123 | 110        | 100 | 300 | 373 | 1.39   |
| CSU082120309FS123 | 110        | 200 | 300 | 286 | 1.17   |

# Stago Fibre-Optic Duct


## Dimensions

### Duct




| Cat. No.        | Dimensions |     | Weight |
|-----------------|------------|-----|--------|
|                 | H          | W   | Kg     |
| CSU7600104FS123 | 60         | 100 | 5.80   |
| CSU7600204FS123 | 60         | 200 | 8.22   |
| CSU7600304FS123 | 60         | 300 | 10.6   |
| CSU7100104FS123 | 110        | 100 | 8.22   |
| CSU7100204FS123 | 110        | 200 | 10.6   |
| CSU7100304FS123 | 110        | 300 | 13.0   |

### Duct cover



| Cat. No.        | Dimensions |     | Weight |
|-----------------|------------|-----|--------|
|                 | H          | W   | Kg     |
| CSU0816113FS123 | 11         | 100 | 1.57   |
| CSU0816303FS123 | 11         | 200 | 2.87   |
| CSU0816433FS123 | 11         | 300 | 5.17   |

### Drop-off UDF




| Cat. No.        | Dimensions |       |     | Weight |
|-----------------|------------|-------|-----|--------|
|                 | H          | W1    | W2  | Kg     |
| CSU0868059FS123 | 133        | 57.5  | 150 | 0.56   |
| CSU0868109FS123 | 133        | 107.5 | 200 | 0.79   |
| CSU0868259FS123 | 133        | 257.5 | 350 | 1.22   |

# Stago Fibre-Optic Duct


## Dimensions

### Internal Riser




| Cat. No.         | Dimensions |     |     |     |     | Weight |
|------------------|------------|-----|-----|-----|-----|--------|
|                  | H          | A   | B   | C   | R   | Kg     |
| CSU08646109FS123 | 60         | 283 | 283 | 100 | 119 | 0.67   |
| CSU08646209FS123 | 60         | 283 | 283 | 100 | 119 | 1.31   |
| CSU08646309FS123 | 60         | 283 | 283 | 100 | 119 | 1.94   |
| CSU08641109FS123 | 110        | 333 | 333 | 100 | 119 | 1.84   |
| CSU08641209FS123 | 110        | 333 | 333 | 100 | 119 | 2.47   |
| CSU08641309FS123 | 110        | 333 | 333 | 100 | 119 | 3.40   |

### External Riser



| Cat. No.         | Dimensions |     |     |     |     | Weight |
|------------------|------------|-----|-----|-----|-----|--------|
|                  | H          | A   | B   | C   | R   | Kg     |
| CSU08666109FS123 | 60         | 283 | 283 | 100 | 119 | 0.57   |
| CSU08666209FS123 | 60         | 283 | 283 | 100 | 119 | 1.14   |
| CSU08666309FS123 | 60         | 283 | 283 | 100 | 119 | 1.71   |
| CSU08661109FS123 | 110        | 333 | 333 | 100 | 119 | 0.99   |
| CSU08661209FS123 | 110        | 333 | 333 | 100 | 119 | 1.56   |
| CSU08661309FS123 | 110        | 333 | 333 | 100 | 119 | 2.13   |

### C-bracket



| Cat. No.    | Dimensions |     |     | Weight |
|-------------|------------|-----|-----|--------|
|             | H          | W   | A   | Kg     |
| CSU08173109 | 153        | 100 | 82  | 0.38   |
| CSU08173209 | 153        | 200 | 136 | 0.94   |
| CSU08173309 | 153        | 300 | 188 | 1.53   |

# Stago Fibre-Optic Duct


## Dimensions

### Omega Bracket "L"




| Cat. No. | Dimensions |     |    | Weight |
|----------|------------|-----|----|--------|
|          | H          | W   | A  | Kg     |
| 4550310  | 131        | 159 | 23 | 0.32   |
| 4550320  | 131        | 259 | 23 | 0.45   |
| 4550330  | 131        | 359 | 23 | 0.57   |

### Omega Bracket "C"



| Cat. No. | Dimensions |     |    | Weight |
|----------|------------|-----|----|--------|
|          | H          | W   | A  | Kg     |
| 4550410  | 196        | 159 | 23 | 0.76   |
| 4550420  | 196        | 259 | 23 | 0.51   |
| 4550430  | 196        | 359 | 23 | 0.63   |

### Vertical Piece 2F




| Cat. No. | Dimensions |    |    | Weight |
|----------|------------|----|----|--------|
|          | L          | A  | B  | Kg     |
| 717196   | 280        | 48 | 24 | 0.80   |
| 717197   | 370        | 48 | 24 | 0.98   |
| 717198   | 505        | 48 | 24 | 1.26   |
| 717199   | 730        | 48 | 24 | 1.71   |
| 717200   | 1000       | 48 | 24 | 2.25   |
| 787276   | 1500       | 48 | 24 | 2.90   |

# Stago Fibre-Optic Duct


## Dimensions

### Claw




| Cat. No.    | Dimensions |    |    | Weight |
|-------------|------------|----|----|--------|
|             | H          | W  | A  | Kg     |
| CSU08150209 | 57         | 46 | 48 | 0.05   |

### Patch panel & RJ45 brackets




| Cat. No.          | Dimensions |    |    | Weight |
|-------------------|------------|----|----|--------|
|                   | H          | W  | A  | Kg     |
| CSU0829A01FS905   | 150        | 74 | 84 | 0.19   |
| vvCSU0829A02FS905 | 150        | 74 | 84 | 0.19   |

### Cantilever Arm 50i



| Cat. No. | Dimensions |     |    | Weight |
|----------|------------|-----|----|--------|
|          | H          | W   | A  | Kg     |
| 791412   | 85         | 150 | 43 | 0.19   |
| 791413   | 85         | 250 | 43 | 0.29   |
| 791414   | 110        | 350 | 43 | 0.46   |

### Closed & Openable Tube



| Cat. No.        | Dimensions |      |     | Weight |
|-----------------|------------|------|-----|--------|
|                 | H          | W    | A   | Kg     |
| CSU0868A03FS905 | 2500       | 54.2 | 200 | 5.62   |
| CSU0868A02FS905 | 2500       | 54.2 | 200 | 6.57   |




# Mounting guide

|                           |    |
|---------------------------|----|
| Modular Drop-Off UDF      | 25 |
| External Coupler          | 26 |
| Universal Cover Clip      | 26 |
| Unilock Coupler           | 27 |
| Modular Cover             | 27 |
| 90° Bend                  | 27 |
| Earthing Kit              | 28 |
| Magnetic Universal Bobbin | 28 |

## Mounting instructions


### Modular Drop-Off UDF

Clip-on modular Drop-Off can be fitted at any desired position on the lateral of the ducts to ensure full flexibility in guiding fibre-optic cables from the duct to the rack/cabinets. The same principle of installation the Patch Panel Bracket and the Keystone RJ45.

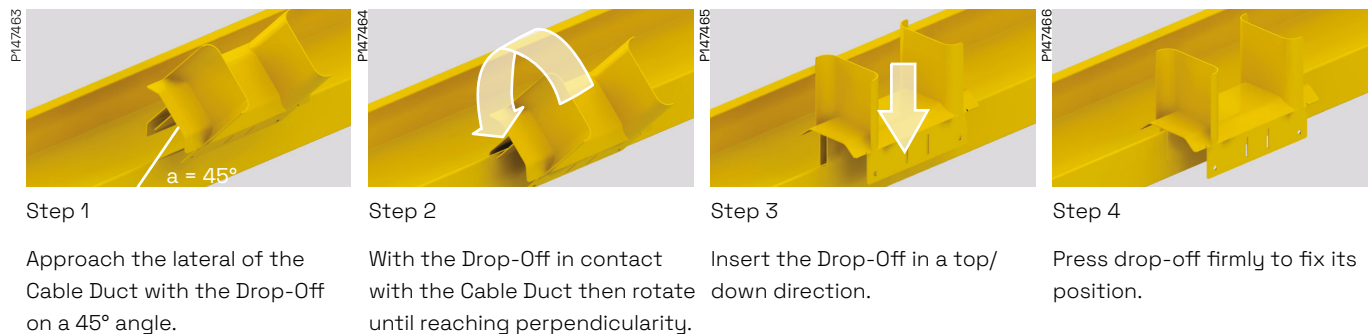


### Coupler

The External Coupler for systems H60 and H110 is the bolted solution to join 2 lengths of Cable Duct. The principle of installation presented below is applicable to system H60. For the case of the system H110 the installer should use four assembly kits per External Coupler. The assembly kit is created by the installer and should consist of bolts M6, Nuts M6, and Star washers M6. The quantity required is driven by the component to fix on.

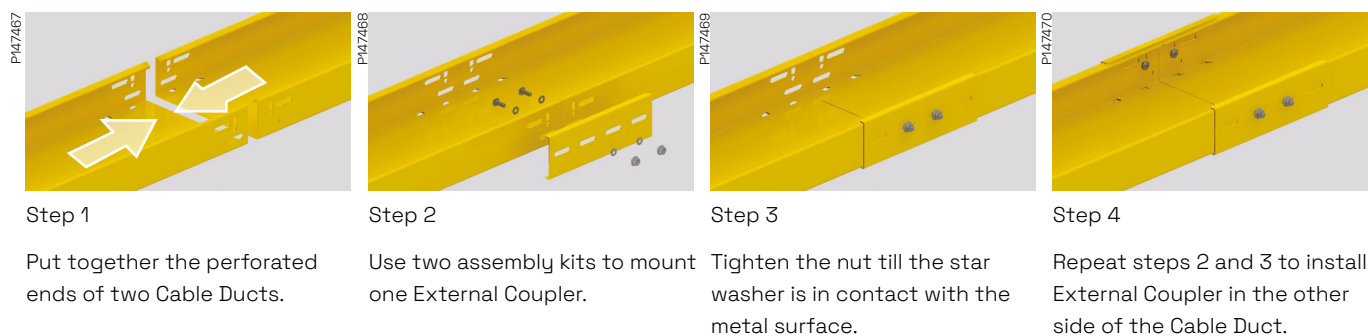

### Universal Cover Clip


Universal Cover Clip for snap-on fixation of the covers.

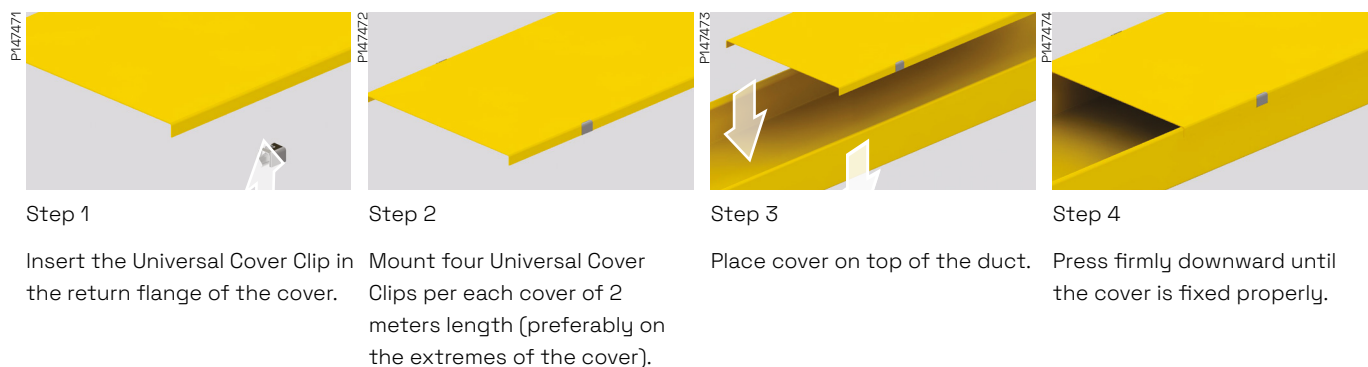

## Mounting instructions


### Unilock Coupler

Screwless snap-in internal coupler for system height 60 to be used to joint two lengths of Cable Duct




Step 1

Put together the perforated ends of two Cable Ducts.




Step 2

Work with only one pre-bent screwless internal coupler at a time.



Step 3

Position the four pins of the internal coupler in the four aligned holes of the Cable Duct.




Step 4

Press the internal coupler till the top part slides inside of the return flange of the Cable Duct.


### Modular Cover

Modular cover piece can be fitted at any desired position on lengths to enhance cable protection at drop-out points.



Step 1

Remove the pre-cut area to open a window where the brush and protective strip can be located.

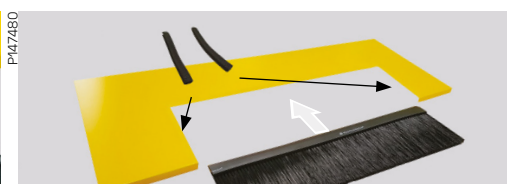

Step 2

Prepare two pieces of Protection Strip (85 mm) and insert them on both laterals of the open window.




Step 3

Fix the Modular Brush Gasket in the longer edge of the open window. Use four Universal Cover Clips to fix the Modular Cover to the tray.

### 90° Bend

Can be used to construct 90° direction changes at any desired position in the Cable Duct.



Step 1

Sleeve the 90° bend over the Cable Duct.



Step 2

Align the hole on the return flange of the 90° Bend with the end of the Cable Duct to position the fixation holes of the Duct and the Form Piece.



Step 3

Use one assembly kit per side to mount the 90° Bend on the Cable Duct.




Step 4

Tighten the nuts till the star washer is in contact with the metal surface.

## Mounting instructions


### Earthing Kit

Kit including earth wire with flat pin connectors and earthing clamps. Connect to 2 cover pieces to ensure electrical continuity between them. Delivered in a bag of 10 pieces.




Step 1

Place the 2 covers near to each other assuring sufficient space left for the clips.




Step 2

Snap the clips on the cover piece 1 piece per cover.



Step 3

Connect the wire to the clips.




Step 4

Close the gap between the covers.


### Magnetic Universal Bobbin

Magnetic bobbin piece can be fitted at any desired position of the duct or form piece for a secure and smooth guidance of fibre-optic cables. Use 2 pieces on bobbin to safely store cable over-length.




Step 1

For cable over-length function place 2 magnetic bobbin pieces on the bottom of the duct nearby each other.



Step 2

Gently wind the cables around the bobbins as seen in the picture.



Step 3

To use the bobbin piece as a bending radius extender place it on the bottom of the duct of form piece.

# Customization handbook


|                                         |           |
|-----------------------------------------|-----------|
| <b>The possibility of customization</b> | <b>30</b> |
| Cabe Duct length and width              | 30        |
| Colors                                  | 30        |

## The possibility of customization


### Cable Duct length and width

Each and every data Centre is different. To adapt to some non standard necessities or special requirements Stago Fibre-optic duct system brings numerous customization options for an optimized installation.

The length of the Cable Duct can be customized by increments of 150 mm, being the shortest Cable Duct 1.5 meters and the longest 6.3 meters.

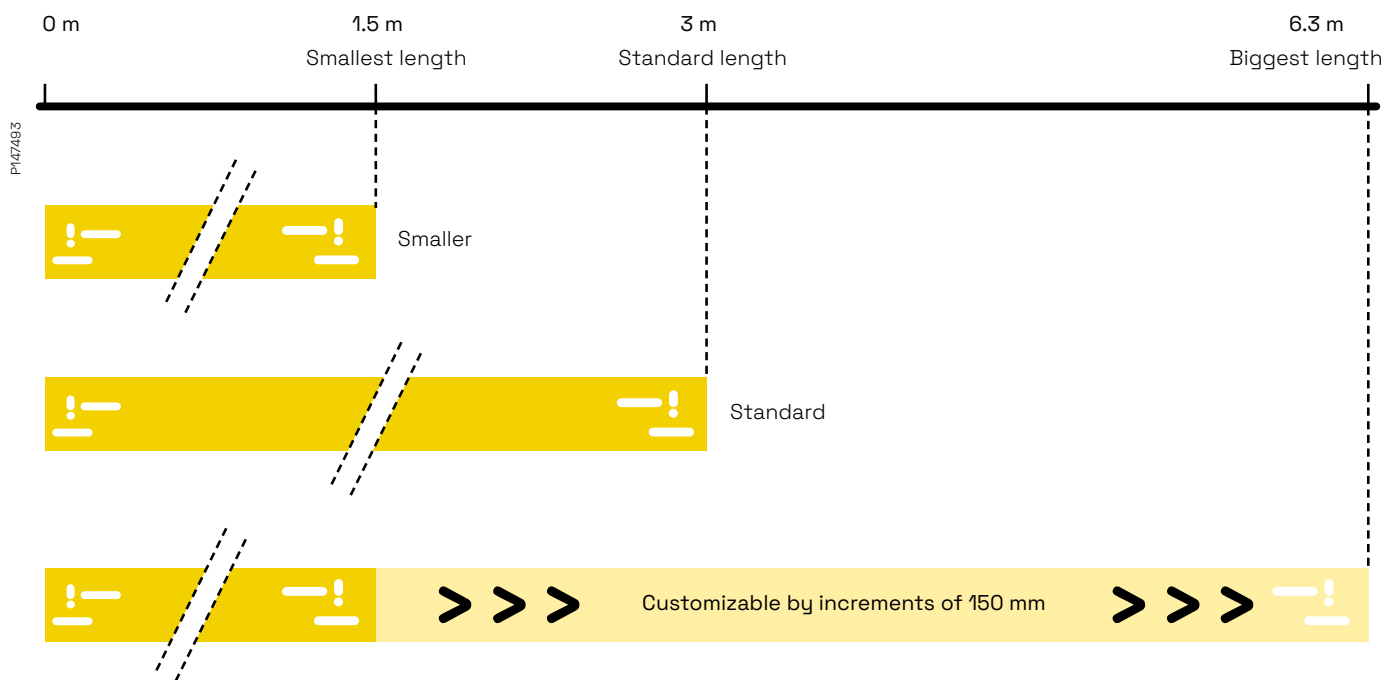

The width of the Cable Duct can also be tailored. Customers have the possibility to select from a large variety of system widths starting from 70 mm up to 600 mm.


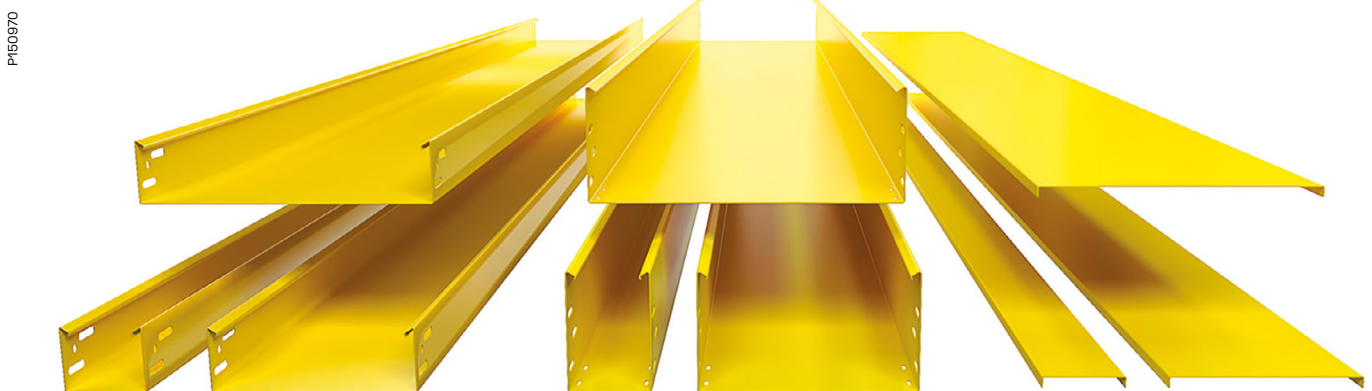


## The possibility of customization

### Colors

Colors may facilitate identification. By using non standard colors tracks can be easily distinguished and recognized. The Stago Fibre-optic duct system provides the possibility to produce in any preferred RAL color.

P147494

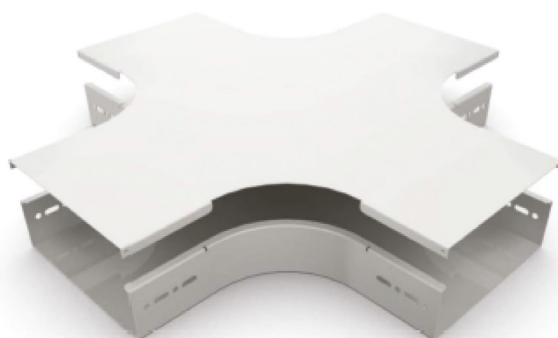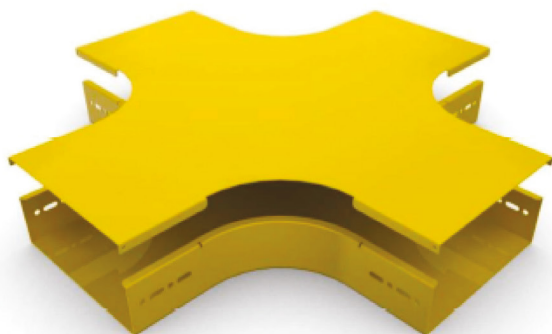



# Security recommendations


|                                           |           |
|-------------------------------------------|-----------|
| <b>Electrical Continuity and Earthing</b> | <b>34</b> |
| Combination 1                             | 34        |
| Combination 2-3-4-5-6                     | 34        |
| Combination 4                             | 34        |

Electrical Continuity and Earthing

The standard IEC 61537 establishes that for Cable Ducts with Electrical Continuity characteristics (metal), this continuity should be guaranteed by means of an equipotential connection and one or several connections to earth in accordance with the use of the Cable Duct system.

The impedance must not exceed: 50 mΩ through the joint or 5 mΩ meter of cable duct.

- 1. Coupling between Cable Duct sections
- 2. Joining two Cable Duct sections

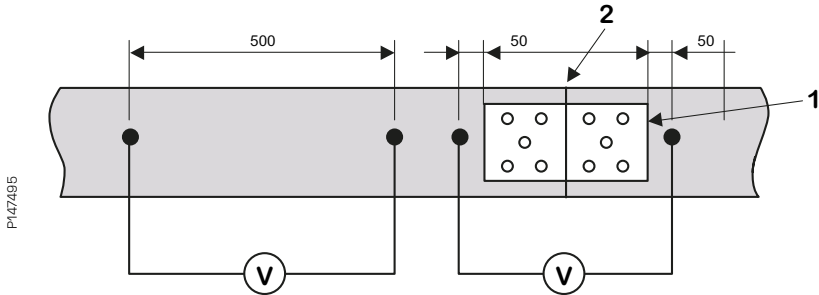

| Tray             | Coupler                   | PG (mΩm) | PG with joint (mΩm) |
|------------------|---------------------------|----------|---------------------|
| Fibre-Optic Duct | Screwless joint (Unilock) | 1.1      | 0.6                 |
|                  | Screwtype internal joint  |          | 1.6                 |
|                  | Screwtype external joint  |          | 1.4                 |

The meter length and joining system for the different sections, as well as the joints of the different accessories supplied, comply the electrical continuity test established in the aforementioned standard, guaranteeing the impedance established.

To guarantee these impedance values tightening torque values of no less than 5Nm are recommended, always using the jointing techniques recommended

for the Fibre-Optic Duct System, and taking sizes into account.

To guarantee a safe installation, Wibe Group recommends a proper earthing of all elements that make up the system (section and accessories), using the accessories designed specifically for this purpose.


**WIBE GROUP RECOMMENDS NOT TO USE THE DUCT AS EARTH OR NEUTRAL CONDUCTORS.**

WIBE GROUP IS NOT RESPONSIBLE OF ANY DAMAGE IF ACCESSORIES FROM OTHER MANUFACTURERS ARE USED. ESTABLISHING EARTH CONNECTION LIES UNDER THE RESPONSABILITY OF THE INSTALLER AND LOCAL REGULATIONS MUST BE TAKEN INTO ACCOUNT.

## Electrical Continuity and Earthing

- Electrical continuity at every connection is guaranteed with 4 star washers, two per coupler (1 at the bolt and another on the nut's side).
- The star/scratch washers damage the powder coating and connect all metallic components. In case of screwless jointing, the star washers are not necessary.
- To secure electrical continuity throughout the system apply a minimum of 5N/m torque when tightening the washers.


The elements in the Fibre-Optic Duct System recommended to guarantee the electrical continuity are:




External Joint  
H60 & H110



Scratch Washer



Internal Joint H110



Internal Joint  
Unilock H60




External Hinge  
Coupler H60 & H110



Earthing Kit


The picture below shows the combination between different elements in the Fibre-Optic Duct System where it is recommended to guarantee the electrical continuity. As a general guideline it is recommended to use star washers on all painted surfaces.

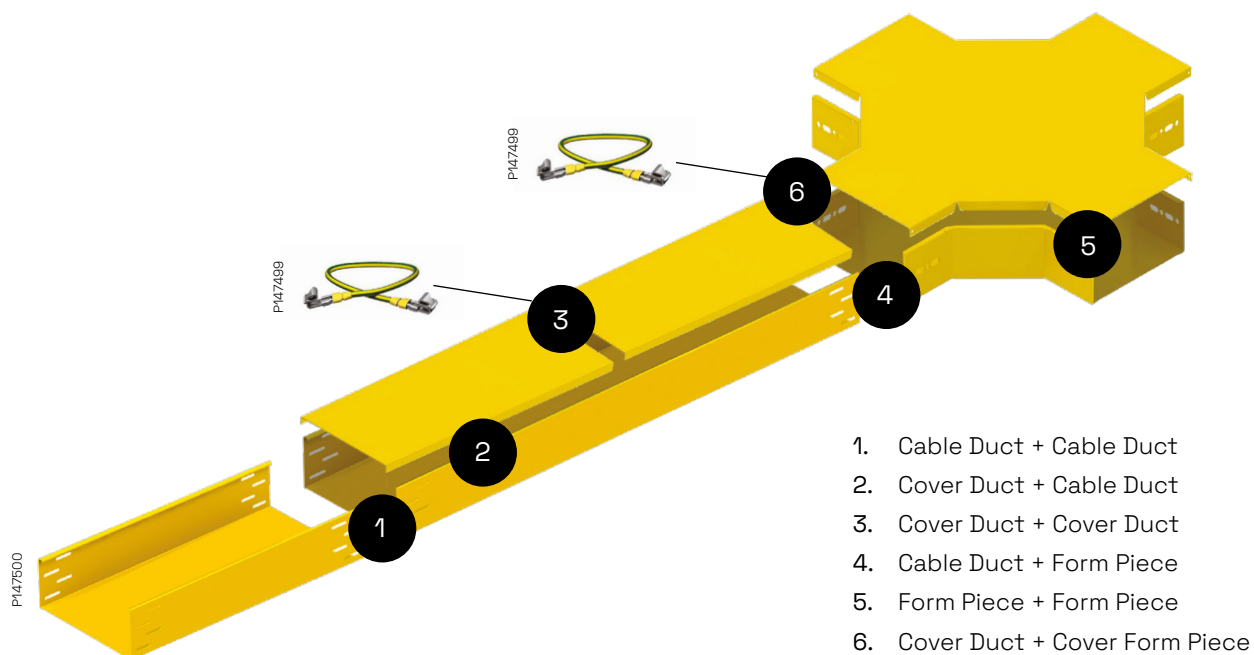

## Electrical Continuity and Earthing

### Combination 1

Depending on the height of the Cable Duct and the jointing technique used, different recommendations must be followed. The pictures below illustrates the different options.




Internal Joint Unilock H60

The inside of the return flange of the Cable Duct is not painted with the purpose to benefit the Electrical Continuity when the top part of the Unilock is in contact with two ends of the Cable Duct.




External Joint H60

When using the External Joint for H60, use 2 scratch washers per set Bolt&Nut, one between the bolt and the Cable Duct and the other between the Joint and the nut.



Internal Joint H110

When using the Internal Joint for H110, use 1 scratch washer per set Bolt&Nut. The washer must be placed between the nut and the Cable Duct.




External Joint H110

When using the External Joint for H110, use 2 scratch washers per set Bolt&Nut, one between the bolt and the Cable Duct and the other between the Joint and the nut.


### Combination 2-3-5-6

In all the combinations where the Covers are interacting, in order to guarantee the Electrical Continuity, it is recommended to use the Earthing Kit. Covers require a separate earthing to ensure electrical continuity throughout the system.




Step 1

Place the 2 covers near to each other assuring sufficient space left for the clips.




Step 2

Snap the clips on the cover piece 1 piece per cover.



Step 3

Connect the wire to the clips.




Step 4

Close the gap between the covers.


### Combination 4

In all combinations of Cable Duct and Form Pieces there is no need of extra jointing piece but the bolt set with two star washers.



Form Piece H60

One set of Bolt&Nut with two scratch washers per each side to be connected.



Form Piece H110

Two sets of Bolt&Nut with two scratch washers per each side to be connected.



