


Tools for Cu terminals 10 - 240 mm², Al terminals 16- 25 mm² (-35 solid) mm² and C-sleeves 6 - 50 mm²

T2600/T2600B/T2600C



Crimp types

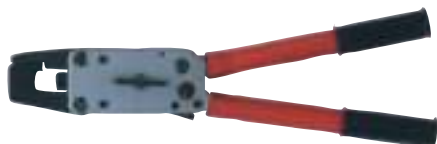

EIPRESS		KSF ↓	
TB		KSF	
8	10	1	
9	16	1	
11	25	1	
13	35	1	
14,5	50	1	
17	70	2	
20	95	2	
C ↓			
C4	1		
C5	1		
C6	1		
C8-9	2		

Information label for crimp tools T2600.

T2600/T2600B/T2600C

Mechanical handtool for crimping of Cu- and Al terminals:
T2600 for crimping of Cu terminals type KRF/KSF 10-95 mm²
T2600B for crimping of Cu terminals type KRD/KSD 10-120 mm²
T2600C for crimping of Cu terminals type KRT/KST 10-120 mm²

Particulars:

- rapid opening enables easy die change and quick removal after jointing
- crimp die (TB7) is available for solid 10 mm² Cu-connector, (for EXCL-type cable or similar)
- crimp force up to 57 kN
- rapid die closure and minimum handle force
- easy to operate in confined spaces
- only four dies are required to crimp 10 - 120 mm² Cu (KRD/KRT)
- rapid feed function
- supplied in a metal box
- equipped with full closure mechanism
- weight 1.9 kg
- length 440 mm, width 140 mm

V600



Crimp types



V600

Crimp head for crimping Cu terminals of type KRF/KSF 10-150 mm², KRD/KSD 10-185 mm², KRT/KST 10-240 mm² and C-sleeves up to 50/50 mm². Used together with footpump P4000, battery / mains powered pump PS710 and mains powered pump P1000.

Particulars:

- crimping force 55 kN
- robust textile bag with room for 10 die pairs
- weight 2.1 kg
- dimensions 189 x 53 x 74 mm