

## Certified Miniforce tools for un-insulated terminals 0.5 - 10 mm<sup>2</sup>



### Technical data:

- unique mechanism that reduces maximum handle force with 30% compared to the earlier Exx version
- ratchet system to guarantee a fully closed crimp
- release mechanism if the crimping sequence must be interrupted
- distinctly marked die nests
- adjustable if changes occur, ie after many crimps
- tested with Elpress terminals
- ergonomically designed handles to fit all users
- optimises the crimp quality
- reduces the risk for repetitive strain injuries (RSI)
- light and handy design without reduction in durability
- type C has extra long handles for comfortable two-hand grip
- at least 80.000 crimps
- delivered with certificate for quality assurance

### Crimp range 0.5 - 6 mm<sup>2</sup>

## GRB0560L and GRB0560LC

Elpress Miniforce crimp tools for roll crimping of un-insulated terminals.

Type L crimp tools are supplied with **three exchangeable locators** for receptacle terminals (see table).

Type LC has **locators** and long handles.

### Particulars:

- supplied in a practical and rigid plastic box
- the L and LC type tool has locators - your "third hand" - to hold the terminals in the right crimp position, which simplifies quality performance considerably


GRB0560L



GRB0560LC



Crimp type

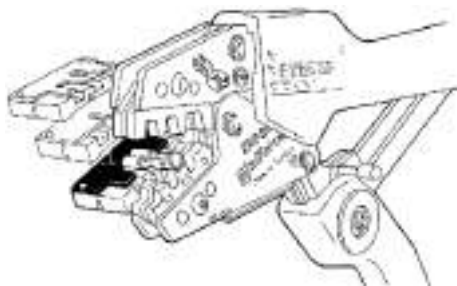

GRB0560-locator.

Locator	Marking	
A	1.	B1507FLS1 B1507FLSN
	2.	B2507FLS1 B2507FLSN
	3.	B4607FLSN B4607FLS1
C	1.	B1507H
	2.	B2507HN
	3.	B4607HN
E	1.	B1505FLS (5 or 8) -1
	2.	B2505FLS (5 or 8) -1

Area	Cat. no.	Crimp type	Weight	Length x Width
0.5-6 mm <sup>2</sup>	GRB0560L	roll	0.952 kg	220 x 72 mm
0.5-6 mm <sup>2</sup>	GRB0560LC	roll	0.986 kg	255 x 72 mm