

Un-insulated terminals and tools

Tabs 0.5 - 2.5 mm²

■ Data: brass, tin plated.



mm ²	Cat. no	mm e	L	Tabs	s	Pcs/ pack	Rec. tool
0,5-1	B1003H	5,6	12,7	2,8x0,8	7	100	DRB0115
0,5-1,5	B1507H	8,0	19,0	6,3x0,8	7	100	GRB0560
1,5-2,5	B2507H	8,0	20	6,3x0,8	8	100	GRB0560

s = strip length

Tabs with locking lip 0.5 - 6 mm²

■ Data: brass, tin plated.



mm ²	Cat. no.	mm e	L	Tabs	s	Pcs/ pack	Rec. tool
0,5-1,0	B1007HN	16,0	28	6,3x0,8	8	100	DRB0115
1,5-2,5	B2507HN	16,0	28	6,3x0,8	8	100	GRB0560
4-6	B4607HN	16,0	28	6,3x0,8	9	100	GRB0560

s = strip length

Bullets 0.2 - 1.5 mm²

■ Data: brass, tin plated.




mm ²	Cat. no	mm e	L	Ø bullet	s	Pcs/ pack	Rec. tool
0,2-0,5	B0502HA	5,5	21	2,0	7	100	DRB0115
0,5-1,5	B1502HA	5,5	21	2,0	8	100	DRB0115

s = strip length

Sockets 0.2 - 1.5 mm²

■ Data: brass, tin plated.

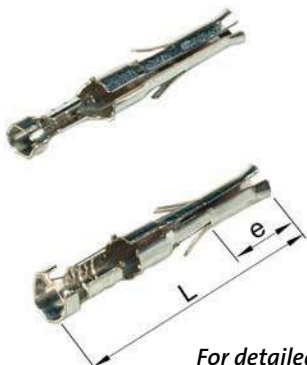

mm ²	Cat. no.	mm e	L	For bullet Ø	s	Pcs/ pack	Rec. tool
0,2-0,5	B0502HO	5,5	21	2,0	7	100	DRB0115
0,5-1,5	B1502HO	5,5	21	2,0	8	100	DRB0115

s = strip length

For detailed information regarding recommended tool, see tool section at the end of this chapter.