

## BGS2



GPRS  
Class 10



Advanced  
Temperature  
Management



Full Voice  
Support



Quad-Band



TCP/IP




RLS  
Monitoring



Generic Flash  
Access



SSL  
Encryption

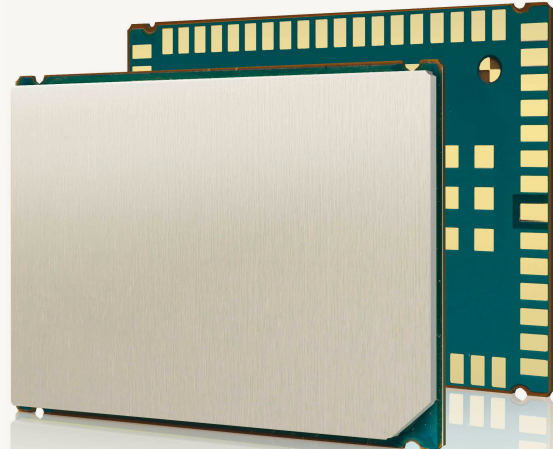

# 2G

Cinterion® BGS2 Wireless Module  
Perfect M2M at Minimal Footprint

# Cinterion® BGS2 Wireless Module

## Perfect M2M at Minimal Footprint

The Cinterion BGS2 module is the most successful 2G LGA wireless module in the market offering full voice capabilities, high speed GPRS data transmission and best-in-class low power consumption, making it an exceptional choice for all-around machine-to-machine communications.


The ultra-compact design offers a minimal footprint perfectly suited to the needs of M2M manufacturers of small, high-volume devices with a focus on reliable and efficient processes.

With BGS2 Release 2, the module adds Quad-Band GSM/GPRS with advanced SSL encryption for IP-based services, jamming detection, an analog and digital audio interface and generic flash access to the internal memory of the module.

The unique multi-design capabilities of the new release allows seamless migration to the world's smallest 3G wireless module, supporting HSPA data transmission within a contiguous design framework to assure long-lasting, future-proof M2M applications.

BGS2 comes in two flavors as Quad-Band with GPRS class 10 (BGS2-W) and Dual-Band with GPRS class 8 (BGS2-E). As is true with all Cinterion modules, the BGS2 includes full type approval (FTA) for global roaming and certification for use with the largest carriers worldwide.

### Perfect M2M at Minimal Footprint



#### Multi Design Capability

The unique BGS2 footprint, based on LGA technology, offers seamless migration from 2G to 3G within a single design footprint. Compatibility with the world's smallest HSPA wireless module ensures future-proof and longevity of M2M applications.

#### Generic Flash Access

The BGS2 module enables the application processor to have a generic access to the internal memory of the module, allowing it to be used either to store voice prompts or to download application software for upgrades.

#### RLS Monitoring

Radio link stability (RLS) monitoring enables the application to detect jamming attacks, triggering preventive actions to secure the device.

#### Gemalto M2M Support includes:

- > Personal design-in consulting for hardware and software
- > Extensive RF test capabilities
- > GCF/PTCRB conform pretests to validate approval readiness
- > Regular training workshops



Local engineers, a competent helpdesk, a dedicated team of R&D specialists and an advanced development center are the hallmarks of our leading support offer.

# Cinterion® BGS2 Features

## GENERAL FEATURES

- > GSM Quad-Band: 850 / 900 / 1800 / 1900 MHz (BGS2-W)
- > GSM Dual-Band: 900 / 1800 MHz (BGS2-E)
- > 3GPP release 99
- > GPRS multi-slot Class 10
- > Compliant to GSM phase 2/2+
- > Output power:
  - > Class 4 (2W) for 850 / 900 (BGS2-W)
  - > Class 1 (1W) for 1800 / 1900 (BGS2-W)
  - > Class 4 (2W) for 900 (BGS2-E)
  - > Class 1 (1W) for 1800 (BGS2-E)
- > SIM Application Toolkit Class 3, letter Class B and C, Release 99
- > Control via AT commands (Hayes, 3GPP TS 27.007 and 27.005)
- > Internet Services TCP server/client, UDP, HTTP, FTP, SMTP, POP3, Ping
- > Secure Connection with TLS
- > DTMF detector
- > Supply voltage range 3.3 to 4.5 V
- > LGA66 soldering mount, MSL4
- > Dimensions: 27.6 × 18.8 × 2.7 mm
- > Operating temperature: -40 °C to +90 °C
- > RoHS and EuP compliant

## SPECIFICATIONS

- > GPRS Class 10
  - DL: max. 85.6 kbps,
  - UL: max. 42.8 kbps
  - Mobile Station Class B
- > CSD data transmission up to 14.4 kbps, V.110, non-transparent
- > USSD support
- > SMS text and PDU mode, cell broadcast
- > Fax Group 3, Class 1 and Class 2
- > High quality voice support for handset, headset and hands free (double talk) operation
- > FR, HR, EFR and AMR speech codec support
- > Integrated TTY modem

## SPECIAL FEATURES

- > Voice prompts
- > Firmware update via serial interface
- > Radio Link Stability Monitoring
- > Real time clock with alarm functionality
- > Customer Flash Storage / Generic flash access

## INTERFACES (LGA PADS)

- > Power supply
- > Audio analog & digital interface
- > Serial interface 1.8 V, including automatic baud rate detection
- > ICC/UICC card interface 1.8 V and 3.0 V supporting SIM
- > 6 GPIO pins 1.8 V (special option for PWM or Buzzer and status indication functionality, 2 GPIO usable for I<sup>2</sup>C)
- > fast shut down
- > ADC interface

## DRIVERS

- > RIL driver for Android™ based devices
- > RIL driver for Windows Mobile™ based applications

## APPROVALS

- > CE, R&TTE, GCF
- > FCC, PTRCB, UL, IC (BGS2-W)
- > GCF Listing
- > Other local approvals and network operator certifications

**For more information, please visit**

[m2m.gemalto.com](http://m2m.gemalto.com), [www.facebook.com/gemalto](http://www.facebook.com/gemalto), or Follow @gemaltom2m on twitter.

The information provided in this brochure contains merely general descriptions or characteristics of performance, which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. All product designations may be trademarks or product names of Gemalto M2M GmbH or supplier companies whose use by third parties for their own purposes could violate the rights of the owners. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners. ARM9 is a registered trademark of ARM Limited.

**Gemalto M2M GmbH**  
St.-Martin-Str. 60  
81541 Munich  
Germany

