



E2MC "Raintight" Non-Explosion Proof Gland (416MC series)

SUITABLE FOR MC ARMORED CABLES

Features and benefits:


- Fast, easy installation
- Large sealing range
- Tested and approved to UL standards
- UL listed category PJOX

Technical Information:

- Brass construction with bright autocatalytic nickel coating of exposed components
- For use in most climatic conditions, rated to IP66 for wet locations
- Full installation instructions supplied

Specifications

Gland Reference		Cable Dimensions Accommodated				Gland Dimensions				Weight
Design Reference	Hub Size NPT (D)	Over Armor (A)		Overall Ø (B)		Hub Length (E)	Protrusion Length (F)	Hexagon or Diameter		lbs
		Min	Max	Min	Max			A/F (G)	A/C (H)	
416MC-02	½"	0.460"	0.500"	0.56"	0.62"	0.54"	2.1"	1.20"	1.34"	0.40
416MC-03	¾"	0.485"	0.680"	0.51"	0.76"	0.63"	2.2"	1.30"	1.45"	0.60
416MC-04	1"	0.650"	0.890"	0.67"	1.05"	0.75"	2.4"	1.67"	1.89"	0.75
416MC-05	1 ¼"	0.865"	1.140"	0.95"	1.30"	0.79"	2.7"	1.97"	2.17"	1.20
416MC-06	1 ½"	1.100"	1.350"	1.14"	1.44"	0.81"	2.6"	2.22"	2.42"	1.50
416MC-07	2"	1.320"	1.540"	1.36"	1.65"	0.85"	2.6"	2.47"	2.76"	1.60
416MC-08	2 ½"	1.510"	2.080"	1.55"	2.20"	1.26"	3.7"	3.55"	3.94"	4.95
416MC-09	3"	2.070"	2.700"	2.11"	2.85"	1.32"	3.9"	3.89"	4.30"	5.25
419MC-10	3 ½"	2.900"	3.350"	2.76"	3.52"	1.38"	4.3"	4.84"	5.57"	7.95

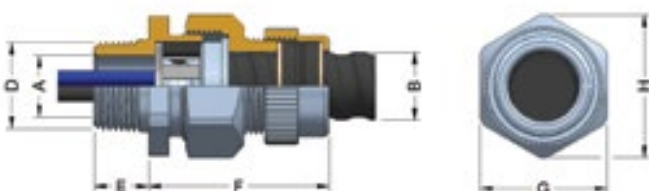

All Enquiries: | tel: +44 (0)1744 762 929 | email: sales@etechcomponents.com | web: www.etechcomponents.com