

# L-Flex

## LTE/Multiband Flexible PCB Antenna

### Features

- ◆ Covers 700-2700 MHz bands
- ◆ Flexible PCB for ease of mounting
- ◆ Double-sided tape mounting
- ◆ Various cable/connector options

### Specifications

Frequency range	690-960 / 1710-2170 / 2500-2700 MHz
Peak Gain	2.6 / 3.0 / 2.9 dBi
Polarisation	Linear
Impedance	50 Ohm
VSWR	<2.5:1
Power rating	10W
Cable / Connector	10cm cable - U.FL, SMA, TS9, CRC, FME
Dimensions	137 x 33 x 0.2mm

### Popular Ordering Options

FLFX35349-UF-10	L-Flex antenna with 100mm cable and U.FL
FLFX35349-SM-10	L-Flex antenna with 100mm cable and SMA-Male




All Enquiries: tel: +44 (0)1744 762 929 | email: [sales@etechcomponents.com](mailto:sales@etechcomponents.com) | web: [www.etechcomponents.com](http://www.etechcomponents.com)

Specifications subject to change without notice.

# L-FLEX | LTE Multiband Flexible PCB Antenna

## VSWR

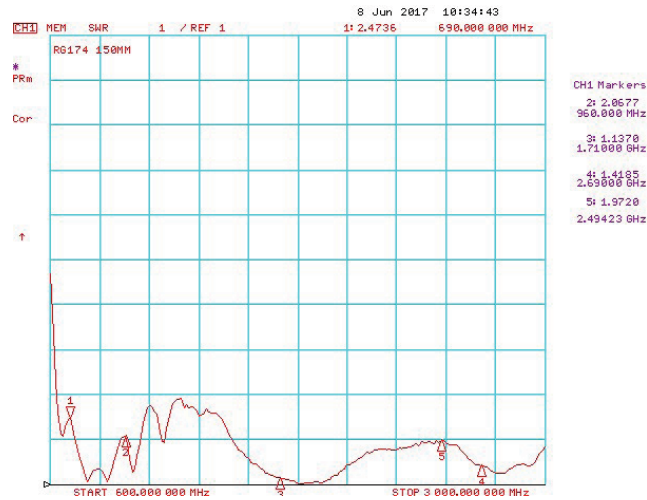

## Return Loss

