


nVent CADDY Pyramid ST Fixed Strut Support



- Provides superior support for pipe, conduit, duct, cable tray and equipment
- Foam bottom offers low abrasion interface for better roof membrane protection
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Provides superior load distribution, even with varying rooftop surfaces
- Ready to use out of the box, saving installation time and labor
- Multiple sizes and load ratings offer the ability to tailor the solution to the application
- Easy to transport to the roof
- Hot-dip galvanized and UV stabilized for long lasting performance

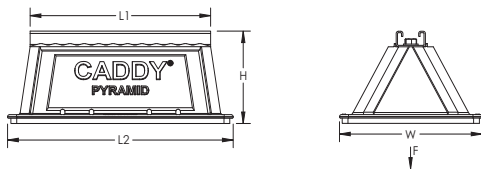

Material: Polyethylene, Polypropylene, Steel
 Finish: Hot-Dip Galvanized
 Temperature: -45 to 65 °C
 Static Load Safety Factor: 3:1

| Part Number | Article Number | Length 1 L1 | Length 2 L2 | Height H | Width W | Surface Area | Unit Weight | Static Load F |
|-------------|----------------|----------------|----------------|-------------|------------|------------------------|-------------|------------------|
| PSF6C | 360463 | 152 mm | 203.0 mm | 122 mm | 152 mm | 26,452 mm ² | 0.5 kg | 1,334 N |
| PSF10C | 360464 | 254 mm | 317.5 mm | 122 mm | 203 mm | 59,355 mm ² | 1.0 kg | 4,450 N |
| PSF10D | 360465 | 254 mm | 317.5 mm | 163 mm | 203 mm | 59,355 mm ² | 1.5 kg | 4,450 N |
| PSF16C | 360466 | 406 mm | 483.0 mm | 122 mm | 203 mm | 91,613 mm ² | 1.5 kg | 6,670 N |
| PSF16D | 360467 | 406 mm | 483.0 mm | 163 mm | 203 mm | 91,613 mm ² | 2.0 kg | 6,670 N |

Static load at 73.1 kPa [10.6 psi] roof loading. Contact project or roofing engineer for maximum allowable load on individual project roof system.

All Enquiries: tel: +44 (0)1744 762 929 | email: sales@etechcomponents.com | web: www.etechcomponents.com

etech
components

