


Safe-D F-Clip 30 Flex, Fit, Fold



dition





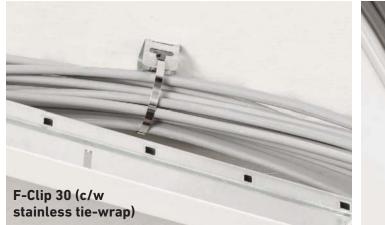


Safe-D F-Clip 30 is a fire-rated flexible cable clip that is supplied in flat form, and can be quickly folded to secure cable installations.

Users simply fold upright those notches which are either side of the 5.7mm fixing hole; to make a U-shape for use in 25x16mm mini trunking, or D-Line 30x15mm mini trunking.

The flat-form is also ideal for shot-fired fixings which can be first-fixed, before sides are inwardly folded to secure cables.

Side notches can also be used to thread steel ties, useful for securing larger bundles of cables.







Space efficient, pocket friendly & easy to handle



Suitable for direct to surface fitting

- Supplied flat...
 - Space efficient and pocket friendly
 - Easier handling to save installation time
 - Easy folding to consider space and cable volume - Perfect for shot fired fixings

970°c

- Compliant with BS7671 and BS5839-1 requirements
- >1200°C melting point
- Slots enable use as cable tie base
- 3x fixing holes for versatility, ideal for use with D-Line D-Fixings
- Thumb friendly, rounded corners, 20mm wide, and pliable for easy installation
- · Fit direct to surface, or in PVC trunkings
- Easy to later add or remove cable(s)
- Uniquely versatile for shaping as required

Code

Description

SAFEDFLCIP30

(L) 56mm x (W) 20mm x (H) 8mm (folded - max height) 5.7mm diameter pre-drilled hole in base





Safe-D F-Clip 40 Flex, Fit, Fold & Lock








Safe-D F-Clip 40 is a fire-rated flexible cable clip that is supplied in flat form, and can be folded to make a variety of shapes to most effectively secure cable installations.

Installers can pass the locking tab through a choice of opposing slots, according to the volume of cables to be secured.

The locking tab gives greatest security, and can be returnfolded if preferred.

Safe-D F-Clip notches can be flexed (for example to open for adding or removing cables) up to five times, after which replacement F-Clips should be used.





- Supplied flat...
 - Space efficient and pocket friendly
 - Easier handling to save installation time
 - Easy folding to consider space and cable volume - Perfect for shot fired fixings
- Compliant with BS7671 and BS5839-1 requirements
- >1200°C melting point
- Locking feature to hold cables most securely... simply push the tab through the preferred notch
- Locking tabs can be return-folded for extra security
- 3x fixing holes for versatility, ideal for use with D-Line D-Fixings
- Thumb friendly, rounded corners, 20mm wide, and pliable for easy installation
- Fit direct to surface, or in PVC trunkings
- Easy to later add or remove cable(s) Can be opened/closed up to 5x

Description

SAFEDFCLIP40

(L) 110.5mm x (W) 20mm x (H) 20mm (folded - max height) 5.7mm diameter pre-drilled hole in base



Code



Safe-D F-Clip 50 Flex, Fit, Fold & Lock











F-Clip 50 c/w FP cables (& locked!)

- Supplied flat...
 - Space efficient and pocket friendly
 - Easier handling to save installation time
 - Easy folding to consider space and cable volume

970°c

- Perfect for shot fired fixings
- Compliant with BS7671 and BS5839-1 requirements
- >1200°C melting point
- Non-corrosive finish
- Locking feature to hold cables most securely... simply push the tab through the preferred notch
- Locking tabs can be return-folded for a more secure installation
- 3x fixing holes for versatility, ideal for use with D-Line D-Fixings
- Fit direct to surface, or in PVC trunkings
- Easy to later add or remove cable(s) - Can be opened/closed up to 5x

F-Clip 50 c/w temporary electrics


SAFEDFCLIP50

triangular in coving

Safe-D F-Clip 50 is a fire-rated flexible cable clip that is supplied in flat form, and can be folded to make a variety of shapes to most effectively secure cable installations.

The first notches (either side of the 5.7mm hole) can be simply folded upward to make vertical tabs; with the base being perfect for use in 50mm width non-metallic trunking. The locking tab can then be passed through any opposing slot, according to the volume of cables to be secured.

Being 165mm long, this F-Clip is most versatile, and can be easily shaped however required, while users appreciate the pocketfriendly design saves handling and fitting time. In fire-conditions F-Clips can withstand 970°C for at least 2 hours, assuring that cable installations will not collapse. F-Clips have been extensively fire-tested on both wall planes and underside ceilings.



(L) 165mm x (W) 20mm x (H) 35mm (folded - max height) 5.7mm diameter pre-drilled hole in base

etech

All Enquiries: tel: +44 (0)1744 762 929 | email: sales@etechcomponents.com | web: www.etechcomponents.com