

Your representation:

etech
components


All Enquiries:
tel: +44 (0)1744 762 929
email: sales@etechcomponents.com
web: www.etechcomponents.com

FIPLOCK[®]

FPAN

Wellrohr, Standardausführung
Corrugated conduit, standard version

+120 °C
-45 °C

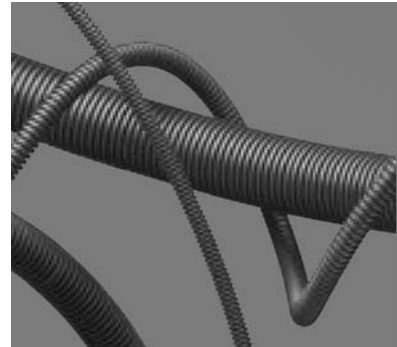

	min.				max.
Temperaturbereich Temperature range	■	■	■	■	■
Flexibilität/Biegesteifigkeit Flexibility/Ductility	■	■	■	■	■
Dynamik Dynamic	■	■	■	■	■
Mechanischer Schutz Mechanical protection	■	■	■	■	■
Brandverhalten Fire precaution performance	■	■	■	■	■
Chemische Beständigkeit Chemical resistance	■	■	■	■	■
Witterungsbeständigkeit Resistance to weathering	■	■	■	■	■

Material: PA6 MOD

Das FPAN Wellrohr aus speziell formuliertem Polyamid 6, ist für unterschiedlichste Kabelschutzanwendungen geeignet. Der „Allrounder“ ist selbstlöschend, halogen- sowie cadmiumfrei. Mit ausgezeichneter Schlagzähigkeit, Druckfestigkeit und guter Flexibilität erfüllt dieses Wellrohr anspruchsvollste technische Anforderungen für Anwendungen im Maschinen-, Apparate- und Installationsbau.

Material: PA6 MOD

The corrugated conduit FPAN is made of specially modified Polyamide 6 and is suitable for various cable protection applications. The „allrounder“ is self-extinguishing and free of halogen and cadmium. Excellent impact resistance, compression strength and good flexibility qualify the product for demanding applications in machine building, installation and construction industries.



Artikel-Nr. Part No.			Nennweite Nominal width		Profil Profile	Dimensionen in mm (nom.) Dimensions in mm (nom.)		Biegeradius in mm Bending radius in mm	VPE PU
schwarz / black	grau / grey	natur / natural	NW	metr.		ID	AD / OD	stat. R.	m
FPANF-07B.50	FPANF-07G.50	FPANF-07N.50	07	10	F	6,2	10,0	15	50
FPANF-10B.50	FPANF-10G.50	FPANF-10N.50	10	12	F	9,6	12,8	20	50
FPANF-12B.50	FPANF-12G.50	FPANF-12N.50	12	16	F	12,0	15,7	30	50
FPANF-17B.50	FPANF-17G.50	FPANF-17N.50	17	20	F	16,6	21,1	35	50
FPANF-23B.50	FPANF-23G.50	FPANF-23N.50	23	25	F	22,6	28,4	40	50
FPANF-29B.50	FPANF-29G.50	FPANF-29N.50	29	32	F	29,0	34,5	50	50
FPANF-36B.25	FPANF-36G.25	FPANF-36N.25	36	40	F	36,5	42,4	55	25
FPANF-48B.25	FPANF-48G.25	FPANF-48N.25	48	50	F	47,5	54,4	65	25
FPANC-17B.50	FPANC-17G.50	FPANC-17N.50	17	20	C	16,1	21,1	35	50
FPANC-23B.50	FPANC-23G.50	FPANC-23N.50	23	25	C	22,0	28,5	40	50
FPANC-29B.50	FPANC-29G.50	FPANC-29N.50	29	32	C	28,3	34,7	50	50
FPANC-36B.25	FPANC-36G.25	FPANC-36N.25	36	40	C	36,0	42,3	55	25
FPANC-48B.25	FPANC-48G.25	FPANC-48N.25	48	50	C	47,0	54,4	65	25

Andere Farben, Ring- und Stücklängen auf Anfrage erhältlich. / Other colors, lengths of coils and lengths of pieces are available on request.

