

Your representation:

**etech**  
components

**All Enquiries:**  
tel: +44 (0)1744 762 929  
email: sales@etechcomponents.com  
web: www.etechcomponents.com

**FIPLOCK**<sup>®</sup>


**FPPO**

+105 °C

-40 °C



Wellrohr, Standardausführung  
*Corrugated conduit, standard version*

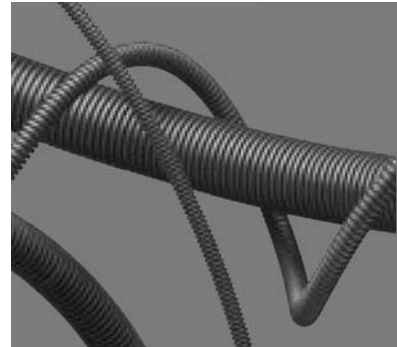

	min.					max.
Temperaturbereich <i>Temperature range</i>	■	■	■	■	■	■
Flexibilität/Biegesteifigkeit <i>Flexibility/Ductility</i>	■	■	■	■	■	■
Dynamik <i>Dynamic</i>	■	■	■	■	■	■
Mechanischer Schutz <i>Mechanical protection</i>	■	■	■	■	■	■
Brandverhalten <i>Fire precaution performance</i>	■	■	■	■	■	■
Chemische Beständigkeit <i>Chemical resistance</i>	■	■	■	■	■	■
Witterungsbeständigkeit <i>Resistance to weathering</i>	■	■	■	■	■	■

**Material: PP MOD**

Das Wellrohr FPPO aus speziell formuliertem Polypropylen, eignet sich für leicht dynamische Kabelschutzanwendungen. Das Produkt ist selbstverlöschend, halogen- sowie cadmiumfrei. Zusätzlich verfügt FPPO über eine sehr gute chemische Beständigkeit und ist daher sehr vielseitig einsetzbar.

**Material: PP MOD**

*The corrugated conduit FPPO made of specially modified Polypropylene, is suitable for light dynamic cable protection applications. The halogen and cadmium free flame retardant product is also very resistant against various strong chemicals and is therefore applicable for versatile requirements.*



Artikel-Nr. <i>Part No.</i>	Nennweite <i>Nominal width</i>		Profil <i>Profile</i>	Dimensionen in mm (nom.) <i>Dimensions in mm (nom.)</i>		Biegeradius in mm <i>Bending radius in mm</i>		VPE <i>PU</i>
	NW	metr.		ID	AD / OD	stat. R.	dyn. R.	
schwarz / black								
FPPOF-07B.50	07	10	F	6,6	10,0	15	40	50
FPPOF-10B.50	10	12	F	9,8	12,8	20	45	50
FPPOF-12B.50	12	16	F	12,3	15,7	25	65	50
FPPOF-17B.50	17	20	F	16,6	21,1	30	70	50
FPPOF-23B.50	23	25	F	23,1	28,4	35	90	50
FPPOF-29B.50	29	32	F	28,9	34,5	45	110	50
FPPOF-36B.25	36	40	F	36,5	42,4	60	170	25
FPPOF-48B.25	48	50	F	47,5	54,4	70	185	25
FPPOC-56B.25	56	68	C	56,3	67,2	100	270	25
FPPOC-70B.25	70	80	C	67,2	79,6	135	340	25
FPPOC-95B.10	95	106	C	91,3	106,0	150	440	10
FPPOC-125B.10	125	146	C	126,5	146,5	320	480	10

Andere Farben, Ring- und Stücklängen auf Anfrage erhältlich. / Other colors, lengths of coils and lengths of pieces are available on request.

