

Your representation:

**etech**  
components


**All Enquiries:**  
tel: +44 (0)1744 762 929  
email: sales@etechcomponents.com  
web: www.etechcomponents.com

**FIPLOCK®**

## FPPS-U

Wellrohr, Standardausführung  
*Corrugated conduit, standard version*

+105 °C  
-40 °C

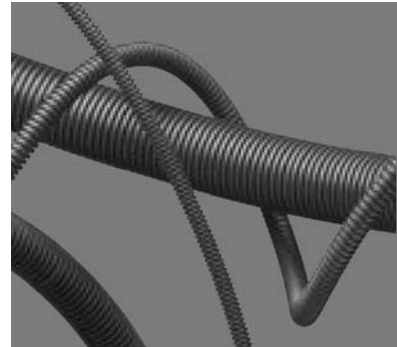

	min.					max.
Temperaturbereich Temperature range	■	■	■	■	■	■
Flexibilität/Biegesteifigkeit Flexibility/Ductility	■	■	■	■	■	■
Dynamik Dynamic	■	■	■	■	■	■
Mechanischer Schutz Mechanical protection	■	■	■	■	■	■
Brandverhalten Fire precaution performance	■	■	■	■	■	■
Chemische Beständigkeit Chemical resistance	■	■	■	■	■	■
Witterungsbeständigkeit Resistance to weathering	■	■	■	■	■	■

### Material: PP MOD BS UV

Das Wellrohr FPPS-U aus hochwertigem, speziell formuliertem Polypropylen, ist UV stabilisiert und eignet sich besonders für Kabelschutz-Außenanwendungen. Die Produkte sind selbstverlöschend, halogen- sowie cadmiumfrei. Zusätzlich verfügt dieses Wellrohr über eine sehr gute chemische Beständigkeit und ist daher sehr vielseitig einsetzbar, speziell bei Bahnanwendungen und im Bereich der Solar- und Photovoltaik.

### Material: PP MOD BS UV

The FPPS-U conduit made of specially modified Polypropylene is specially UV stabilized and suitable for outdoor cable protection applications. The halogen and cadmium free flame retardant product is also very resistant against various strong chemicals and therefore applicable for versatile requirements, especially on track side applications and in the area of solar industry.



Artikel-Nr. Part No.	Nennweite Nominal width		Profil Profile	Dimensionen in mm (nom.) Dimensions in mm (nom.)		Biegeradius in mm Bending radius in mm		VPE PU m
	NW	metr.		ID	AD / OD	stat. R.	dyn. R.	
schwarz / black								
FPPSF-07U.50	07	10	F	6,6	10,0	15	40	50
FPPSF-10U.50	10	12	F	9,8	12,8	20	45	50
FPPSF-12U.50	12	16	F	12,3	15,7	25	65	50
FPPSF-17U.50	17	20	F	16,6	21,1	30	70	50
FPPSF-23U.50	23	25	F	23,1	28,4	35	90	50
FPPSF-29U.50	29	32	F	28,9	34,5	45	110	50
FPPSF-36U.25	36	40	F	36,5	42,4	60	170	25
FPPSF-48U.25	48	50	F	47,5	54,4	70	185	25
FPPSC-56U.25	56	68	C	56,3	67,2	100	270	25
FPPSC-70U.25	70	80	C	67,2	79,6	135	340	25
FPPSC-95U.10	95	106	C	91,3	106,0	150	440	10
FPPSC-125U.10	125	146	C	126,5	146,5	320	480	10
FPPSC-170U.A	170	193	C	172,0	193,0	520	–	A

A = kundenstpezifisch  
A = customized

Andere Farben, Ring- und Stücklängen auf Anfrage erhältlich. / Other colors, lengths of coils and lengths of pieces are available on request.

