

Your representation:

etech
components

All Enquiries:
tel: +44 (0)1744 762 929
email: sales@etechcomponents.com
web: www.etechcomponents.com


FIPLOCK[®]

HPDS

+110 °C
-50 °C



Wellrohr, schwere Ausführung Corrugated conduit, heavy version

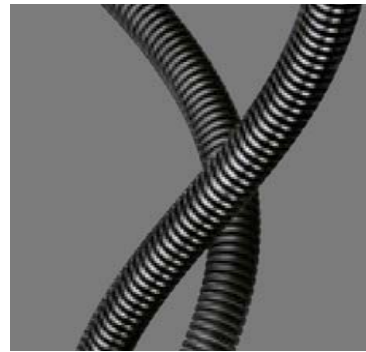

	min.					max.
Temperaturbereich Temperature range	█	█	█	█	█	█
Flexibilität/Biegesteifigkeit Flexibility/Ductility	█	█	█	█	█	█
Dynamik Dynamic	█	█	█	█	█	█
Mechanischer Schutz Mechanical protection	█	█	█	█	█	█
Brandverhalten Fire precaution performance	█	█	█	█	█	█
Chemische Beständigkeit Chemical resistance	█	█	█	█	█	█
Witterungsbeständigkeit Resistance to weathering	█	█	█	█	█	█

Material: PA12 MOD BS

Mit erhöhter Wandstärke eignet sich das HPDS Wellrohr aus hochwertigem, speziell formuliertem Polyamid 12 für erhöhte Kabelschutzanforderungen unter widrigsten Umgebungsbedingungen. Hohe mechanische Festigkeit auch bei tiefen Temperaturen, eine hohe dynamische Wechselbiegefestigkeit sowie gute Brandschutzeigenschaften erlauben die Anwendung in technisch anspruchsvollen Verbindungen.

Material: PA12 MOD BS

The HPDS conduit is made from specially modified Polyamide 12 and is designed with increased wall thickness for enhanced cable protection demands at heavy application environments. Highest mechanical strength also at low temperatures, very high dynamic fatigue strength as well as very good self-extinguishing characteristics allow these products to be used for technically most demanding applications.



Artikel-Nr. Part No.	Nennweite Nominal width		Profil Profile	Dimensionen in mm (nom.) Dimensions in mm (nom.)		Biegeradius in mm Bending radius in mm		VPE PU m
	NW	metr.		ID	AD / OD	stat. R.	dyn. R.	
schwarz / black	NW	metr.		ID	AD / OD	stat. R.	dyn. R.	m
HPDSF-07B.50	07	10	F	6,2	10,0	15	40	50
HPDSF-10B.50	10	12	F	9,6	12,8	20	50	50
HPDSF-12B.50	12	16	F	12,0	15,7	25	60	50
HPDSC-17B.50	17	20	C	16,1	21,1	35	80	50
HPDSC-23B.50	23	25	C	22,0	28,5	40	100	50
HPDSC-29B.50	29	32	C	28,3	34,7	50	120	50
HPDSC-36B.25	36	40	C	35,8	42,3	60	180	25
HPDSC-48B.25	48	50	C	46,7	54,2	70	210	25
HPDSC-56B.25	56	68	C	56,3	67,2	120	260	25
HPDSC-70B.25	70	80	C	67,2	79,6	150	340	25
HPDSC-95B.10	95	106	C	91,3	106,0	230	450	10

Andere Farben, Ring- und Stücklängen auf Anfrage erhältlich. / Other colors, lengths of coils and lengths of pieces are available on request.

