

Your representation:

etech
components

All Enquiries:
tel: +44 (0)1744 762 929
email: sales@etechcomponents.com
web: www.etechcomponents.com


FIP SPLIT[®]

2PPS-0

Teilbares Wellrohr
Divisible corrugated conduit

+105 °C

-40 °C

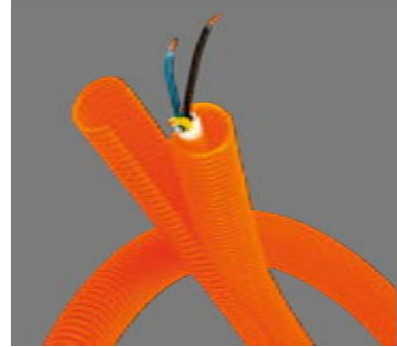

	min.	max.
Temperaturbereich Temperature range	■	■
Flexibilität/Biegesteifigkeit Flexibility/Ductility	■	■
Dynamik Dynamic	■	■
Brandverhalten Fire precaution performance	■	■
Chemische Beständigkeit Chemical resistance	■	■
Witterungsbeständigkeit Resistance to weathering	■	■

Material: PP MOD BS orange ähnlich RAL 2003

2PPS-O ist die ideale Lösung für nachträglich zu montierenden Kabelschutz, selbst für bereits fertig konfektionierte Kabelstränge, inkl. montierter Stecker. Durch das Überlappen des verschleißbaren "Doppelrohres" werden eingelegte Kabel und Leitungen wirksam gegen äußere Einflüsse geschützt. Das aus hochwertigem, speziell formuliertem Polypropylen hergestellte zweiteilige Wellrohr ist geeignet für Anwendungen in denen Kabel bzw. Leitungen speziell oder gesondert gekennzeichnet werden müssen.

Material: PP MOD BS orange similar to RAL 2003

2PPS-O is the perfect solution for retrofit application of cable protection, also pre-assembled cable harnesses with already installed connectors. The double shell conduit properly overlaps and provides enhanced cable protection capabilities against external influences and impacts. This divisible conduit type made of high grade specially modified Polypropylene is suitable for applications in which cables or pipelines have to be marked separately.



Artikel-Nr. Part No.	Nennweite Nominal width	Profil Profile	Dimensionen in mm (nom.) Dimensions in mm (nom.)		Biegeradius in mm Bending radius in mm	VPE PU
			ID	AD / OD	stat. R.	
orange / orange	NW		ID	AD / OD	stat. R.	m
2PPSM-0702.50	07	M	6,3	10,0	20	50
2PPSM-1002.50	10	M	8,4	13,4	25	50
2PPSM-1102.50	11	M	11,0	16,1	30	50
2PPSM-1402.50	14	M	12,5	18,5	35	50
2PPSM-1602.50	16	M	16,0	21,5	40	50
2PPSM-2002.50	20	M	19,2	25,3	45	50
2PPSM-2302.50	23	M	23,4	30,8	50	50
2PPSM-2902.25	29	M	27,3	35,5	90	25
2PPSM-3702.25	37	M	31,0	41,4	110	25
2PPSM-4502.25	45	M	42,7	54,0	130	25
2PPSM-7002.10	70	M	67,5	79,8	190	10
2PPSM-10002.10	100	M	87,5	102,5	210	10

Andere Farben, Ring- und Stücklängen auf Anfrage erhältlich. / Other colors, lengths of coils and lengths of pieces are available on request.

