




Concrete screw anchor, for use in cracked and non-cracked concrete, and hollow concrete slab

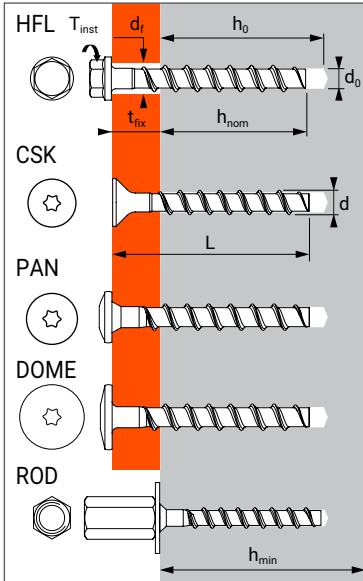

TECHNICAL DATA										
VERSION	RANGE	Embedment depth (mm)	Max. thick. of part to be fixed (mm)	Drilling depth (mm)	Min. thick. of base material (mm)	Thread Ø (mm)	Drilling Ø (mm)	Total anchor length (mm)	Tighten torque (Nm)	Code
		$h_{nom}$	$t_{fix}$	$h_0$	$h_{min}$	$d$	$d_0$	$L$	$T_{inst}$	
HFL	5X40/5		5					40		058726
	5X50/15	35	15	40	80	6,5	5	50	8	058727
	5X60/25		25					60		058728
CSK	6X40/5	35	5	40	80	7,5	6	40	10	058729
	5X40/5		5					40		058770
	5X60/25	35	25	40	80	6,5	5	60	8	058771
PAN	6X40/5	35	5	40	80	7,5	6	40	10	058772
	5X40/5		5					40		058779
	5X50/15	35	15	40	80	6,5	5	50	8	058780
DOME	5X60/25		25					60		058781
	6X30/5*	25	3	28	80	7,0	6	28	10	058787
	6X40/5	35	5	40		7,5		40		058782
ROD	6X40/5	35	5	40	80	7,5	6	40	10	058783
	6X60/5		25					60		058784
	6X35/M6-M8	35	-	40	80			35		058788
	6X35/M8-M10	35	-	40	80	7,5	6	35	10	058785
	6X55/M8-M10	55	-	60	100			55		058786

## CHARACTERISTICS




## ANCHOR MECHANICAL PROPERTIES

SIZE		Ø5	Ø6
$A_s$ [mm <sup>2</sup> ]	Stressed cross-section	33,0	44,2
$W_{el}$ [mm <sup>3</sup> ]	Elastic section modulus	27,0	41,4
$M^{0}_{Rk,s}$ [Nm]	Characteristic bending moment	5,3	10,0
$M$ [Nm]	Recommended bending moment	7,2	5,0
$SW$ [mm]	Key size	10	13

## APPLICATION

- Channel, cable tray
- Brackets
- E-Clips, cowhorn
- Rod hanging

## INSTALLATION

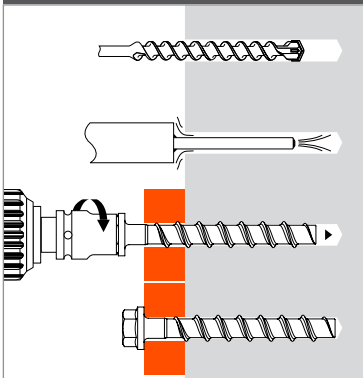



# TAPCON

## MINIMUM THICKNESS OF CONCRETE, CHARACTERISTIC & MINIMUM DISTANCES FOR SPACING, EDGE

SIZE			Ø5	Ø6X30	Ø6	Ø6
Embedment depth	$h_{nom}$	[mm]	35	25	35	55
Minimum thickness of base material	$h_{min}$	[mm]	80	80	80	100
Characteristic edge and spacing distances for full anchor capacity	$C_{cr} \geq$	[mm]	52,5	150	52,5	82,5
	$S_{cr} \geq$	[mm]	105	200	105	165
Minimum distances for cracked and non-cracked concrete	$C_{min}$	[mm]	35	150	35	40
	$S \geq$	[mm]				
	$S_{min}$	[mm]	35	200	35	40
	$C \geq$	[mm]				
Minimum distances for hollow concrete slab	$C_{min}$	[mm]	-	-	100	100
	$S \geq$	[mm]				
	$S_{min}$	[mm]	-	-	100	100
	$C \geq$	[mm]				

## CHARACTERISTIC RESISTANCES [kN]

Characteristic resistances are shown as informative, and have to be used by application of safety factors.

### TENSILE

#### CRACKED AND NON-CRACKED CONCRETE - C20/25

SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$N_{Rk,p}$	[kN]	1,5	0,9	3,0	7,5

#### HOLLOW CONCRETE SLAB

DIMENSIONS		Ø5	Ø6X30	Ø6	Ø6
Bottom flange thickness	[mm]	-	-	$\geq 25$	$\geq 35$
$N_{Rk,p}$	[kN]	-	-	1,0	3,0

### SHEAR

#### CRACKED AND NON-CRACKED CONCRETE - C20/25 to C50/60

SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$V_{Rk,s}$	[kN]	<u>4,4</u>	<u>0,9</u>	<u>7,0</u>	<u>7,0</u>

#### HOLLOW CONCRETE SLAB

DIMENSIONS		Ø5	Ø6X30	Ø6	Ø6
Bottom flange thickness	[mm]	-	-	$\geq 25$	$\geq 35$
$V_{Rk,p}$	[kN]	-	-	1,0	3,0

## RECOMMENDED LOADS OF ONE ANCHOR WITHOUT INFLUENCE OF SPACING & CONCRETE EDGE [kN]

Recommended values are determined from performances given in the ETA, and are guaranteed for spacing  $\geq S_{cr}$  and edge distance  $\geq C_{cr}$ .

### TENSILE

#### CRACKED AND NON-CRACKED CONCRETE - C20/25

SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$N_{Rec}$	[kN]	0,6	0,4	1,4	3,6

$$N_{Rec} = \min [N_{Rd,p}; N_{Rd,c}; N_{Rd,s}] / \gamma_F; \gamma_F = 1,4$$

#### HOLLOW CONCRETE SLAB

DIMENSIONS		Ø5	Ø6X30	Ø6	Ø6
Bottom flange thickness	[mm]	-	-	$\geq 25$	$\geq 35$
$N_{Rec}$	[kN]	-	-	0,5	1,4

$$N_{Rec} = \min [N_{Rd,p}; N_{Rd,c}; N_{Rd,s}] / \gamma_F; \gamma_F = 1,4$$

### SHEAR

#### CRACKED AND NON-CRACKED CONCRETE - C20/25 to C50/60

SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$V_{Rec}$	[kN]	<u>2,5</u>	<u>0,4</u>	<u>4,0</u>	<u>4,0</u>

$$V_{Rec} = V_{Rd,s} / \gamma_F; \gamma_F = 1,4$$

#### HOLLOW CONCRETE SLAB

DIMENSIONS		Ø5	Ø6X30	Ø6	Ø6
Bottom flange thickness	[mm]	-	-	$\geq 25$	$\geq 35$
$V_{Rec}$	[kN]	-	-	0,5	1,4

$$V_{Rec} = V_{Rd,s} / \gamma_F; \gamma_F = 1,4$$

**Nota:** The values indicated in *italics* and underlined correspond to steel failure





Design resistances for static and fire loads are determined from performances given in the ETA, and are guaranteed for spacing  $\geq S_{cr}$  and edge distance  $\geq C_{cr}$ . For project with reduced spacing and edge distance, we recommend to use SPIT i-Expert software to design your project according to EN 1992-4.

## DESIGN RESISTANCE FOR STATIC LOADS IN CRACKED AND NON CRACKED CONCRETE [kN]

TENSILE					
SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$N_{Rd,uncr}$	[kN]				
	C20/25	0,8	0,6	2,0	5,0
	C40/50	1,2	0,6	2,8	7,1

Distances  $S_{cr}$  and  $C_{cr}$  must be fulfilled  
 $N_{Rd,uncr} = \min[N_{Rk,p,uncr} / \gamma_{Mc}; N_{Rk,s} / \gamma_{Ms,N}]$   
 $\gamma_{Mc} = 1,5; \gamma_{Ms,N} = 1,5$

SHEAR					
SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$V_{Rd,s}$	[kN]	<u>3,5</u>	<u>0,6</u>	<u>5,6</u>	<u>5,6</u>

$V_{Rd,s} = V_{Rk,s} / \gamma_{Ms,V}$   
 $\gamma_{Ms,V} = 1,25; \text{Ø6X30: } \gamma_{Ms,V} = 1,5$

## DESIGN RESISTANCE FOR STATIC LOADS IN HOLLOW CONCRETE SLAB [kN]

TENSILE					
SIZE		Ø5	Ø6X30	Ø6	Ø6
Bottom flange thickness	[mm]	-	-	$\geq 25$	$\geq 35$
$N_{Rd}$	[kN]	-	-	0,7	2,0

Distances  $S_{cr}$  and  $C_{cr}$  must be fulfilled  
 $N_{Rd} = \min[N_{Rk,p} / \gamma_{Mc}; N_{Rk,s} / \gamma_{Ms,N}]$   
 $\gamma_{Mc} = 1,5; \gamma_{Ms,N} = 1,5$

SHEAR					
SIZE		Ø5	Ø6X30	Ø6	Ø6
Bottom flange thickness	[mm]	-	-	$\geq 25$	$\geq 35$
$V_{Rd,s}$	[kN]	-	-	0,7	2,0

$V_{Rd,s} = V_{Rk,s} / \gamma_{Ms,V}$   
 $\gamma_{Ms,V} = 1,25$

## DESIGN RESISTANCE FOR FIRE EXPOSURE [kN]

TENSILE					
SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$N_{Rd,fi}$	[kN]	-	0,27	0,75	0,90
$N_{Rd,fi}$	[kN]	-	0,27	0,75	0,80
$N_{Rd,fi}$	[kN]	-	0,22	0,60	0,60
$N_{Rd,fi}$	[kN]	-	0,17	0,40	0,40

$N_{Rd,fi} = N_{Rk,s,fi} / \gamma_{M,fi}$   
 $\gamma_{M,fi} = 1,0$

SHEAR					
SIZE		Ø5	Ø6X30	Ø6	Ø6
$h_{nom}$	[mm]	35	25	35	55
$V_{Rd,fi}$	[kN]	-	0,27	0,75	0,90
$V_{Rd,fi}$	[kN]	-	0,27	0,75	0,80
$V_{Rd,fi}$	[kN]	-	0,22	0,60	0,60
$V_{Rd,fi}$	[kN]	-	0,17	0,40	0,40

$V_{Rd,fi} = V_{Rk,s,fi} / \gamma_{M,fi}; \gamma_{M,fi} = 1,0$   
 $\gamma_{M,fi} = 1,0$