


Connector block for receptacles - 400 V /18 A

- Used in conjunction with flat pin sleeves.
- Material PVC transparent.
- Max voltage 400 V.
- Max current 18 A.

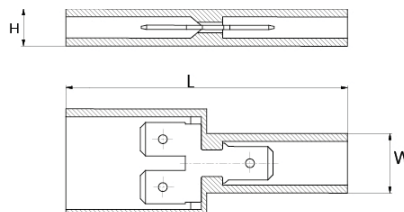

Name	Pole	W mm	H	L	Tab	Pcs/pack
404-1	1	12	6	48	6,3x0,8	100
405-3	1+2	20,7	7,4	54,5	6,3x0,8	100
401-12	12	28	7	147	6,3x0,8	50

Assortment box - uninsulated terminals



Assortment box designed for electricians in the field and for service workshops.

Properties:

- box made of LDPE/TP
- 19 compartments (+ 10 empty compartments)
- 700 uninsulated terminals and through connectors 0.75-10 mm²
- crimping tool DKB0325
- crimping tool GWB4099 Miniforce
- stripping tool SCT001

mm ²	AWG	Name	Net weight (kg)	Length mm	Width	Height
0,75-10	22-8	PL701	3,426	380	285	55