


## Through connectors with heat shrink insulation 0.5 - 6 mm<sup>2</sup>

- Material: Cu 99.95%, tin plated Cu/Sn, contact sleeve of Cu pipe.
- Insulation of halogen-free PA, hot melt adhesive inside the insulation.

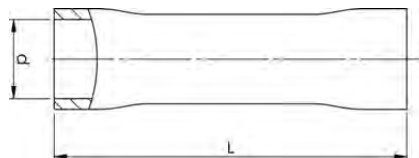


mm <sup>2</sup> (Cu)	AWG Cu	Name	d mm	L	s	Tool	Insulation material	Pcs/pack
0,5-1,5	20-16	A1535SKW	3,7	31,5	8	GSW0560C	PA	25
1,5-2,5	16-14	A2535SKW	4,6	31,5	8	GSW0560C	PA	25
4-6	12-10	A4650SKW	6,5	37,5	9	GSW0560C	PA	25

s = strip length

After crimping and heating with a hot air gun, a water proof terminal, glued to the cable and the connector, is achieved.

## Parallel through connectors 0.5 - 6 mm<sup>2</sup>

- Material: Cu 99.95%, tin plated Cu/Sn, contact sleeve of Cu pipe.
- Insulation of halogen-free PA.

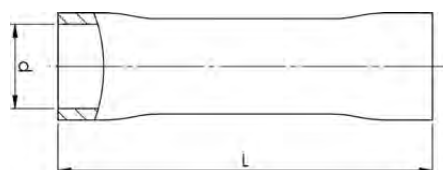

mm <sup>2</sup> (Cu)	AWG Cu	Name	d mm	L	s	Tool	Insulation material	Pcs/pack
0,5-1,5	20-20	A1515PSK	3,2	17	7	GSA0760	PA	100
1,5-2,5	16-16	A2517PSK	4	17	8	GSA0760	PA	100
4-6	12-10	A4634PSK	5,6	21	9	GSA0760	PA	100

s = strip length

Type PSK must be crimped with GSA0760 (C) and with two crimps.