


Pre-insulated end terminals for short-circuit proof cable-insulations 1.5 - 16 mm²

■ Data: Cu 99.95%, tin plated, polypropylene insulation, colour code DIN.

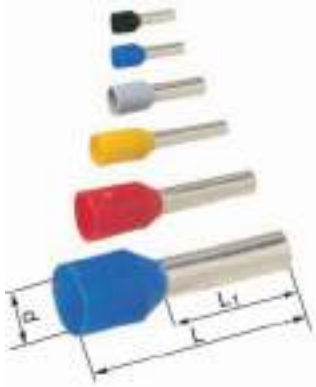

	mm ²	Cat. no.	mm d	L ₁	L	S	Rec. tool	Pcs/pack
■	1,5	A1,5-8ETDXL	6,9	8	17,5	11	EEB0160	100
		A1,5-10ETDXL	6,9	10	19,5	13	EEB0160	100
■	2,5	A2,5-8ETDXL	7,8	8	17,5	11	EEB0160	100
		A2,5-12ETDXL	7,8	12	21,5	15	EEB0160	100
■	4	A4-10ETDXL	7,8	10	19,5	13	EEB0160	100
■	6	A6-12ETDXL	8,3	12	23	15	EEB0160	100
■	10	A10-12ETDXL	9,8	12	24	15	GEB1025	100
■	16	A16-12ETDXL	12	12	25,5	15	GEB1025	100

s = stripping length

For detailed information regarding recommended tool, see tool section at the end of this chapter.