


Receptacles rolled type 0.1 - 6 mm²

- Material: brass, tin plated Cu/Sn, brazed neck.
- PC and PA insulation have easy-entry, PC and PA are halogen-free.

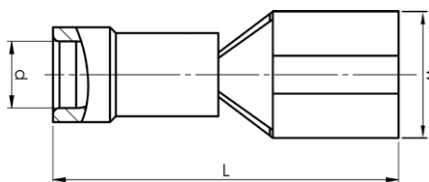


mm ² (Cu)	AWG Cu	Name	W mm	d	L	s	For tab	Tool	Insulation material	Neck type	Easy Entry		Pcs/pack
0,1-0,5	26-20	A0503FLS5	3,7	2,2	16,4	7	2,8x0,5	DSA0115	PVC	Brazed	Yes	Brass, Cu/Sn	100
0,1-0,5	26-20	A0503FLS8	3,7	2,2	16,4	7	2,8x0,8	DSA0115	PVC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1503FLS5	3,2	4	18	7	2,8x0,5	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1503FLS8	3,2	4,0	18	7	2,8x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1505FLS5	5	3,2	19,5	7	4,8x0,5	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1505FLS8	5	3,2	19,5	7	4,8x0,8	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1507FLS	7,6	4	20,5	7	6,3x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1507FLST	7,6	4	20,5	7	6,3x0,8	GSA0760	PC	Brazed	Yes	Tin bronze (phosphor bronze), Cu/Sn	100
1,5-2,5	16-14	A2505FLS5	5,6	4,5	20	8	4,8x0,5	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
1,5-2,5	16-14	A2505FLS8	5	3,9	19,5	8	4,8x0,8	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
1,5-2,5	16-14	A2507FLS	7,6	4,5	20,5	8	6,3x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
1,5-2,5	16-14	A2507FLST	7,6	4,5	20,5	8	6,3x0,8	GSA0760	PC	Brazed	Yes	Tin bronze (phosphor bronze), Cu/Sn	100
4-6	12-10	A4607FLS	7,6	6,4	24	9	6,3x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
4-6	12-10	A4609FLS	10,9	6,6	30,1	9	9,5x1,2	GSA0760	PA	Reinforcement sleeve	Yes	Brass, Cu/Sn	100

s = strip length

Multiple tabs rolled type (piggy back) 0.5 - 2.5 mm²

- Material: brass/Cu, tin plated Cu/Sn.

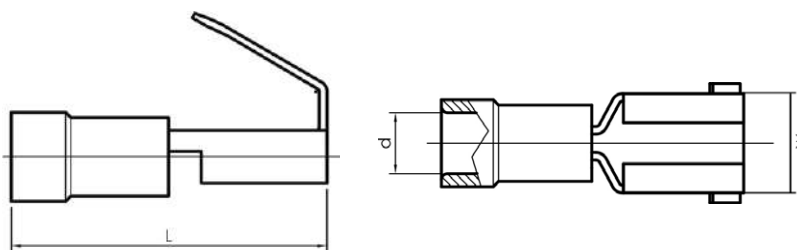

mm ² (Cu)	AWG Cu	Name	W mm	d	L	s	For tab	Insulation material	Neck type	Easy Entry	Pcs/pack
0,5-1,5	20-16	A1507FLSH	6,9	3,2	22	7	6,3x0,8	PA	Reinforcement sleeve	Yes	100
1,5-2,5	16-14	A2507FLSH	6,9	3,9	22	8	6,3x0,8	PA	Reinforcement sleeve	No	100

s = strip length