


Fork terminals 0.25 - 10 mm²

• Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.

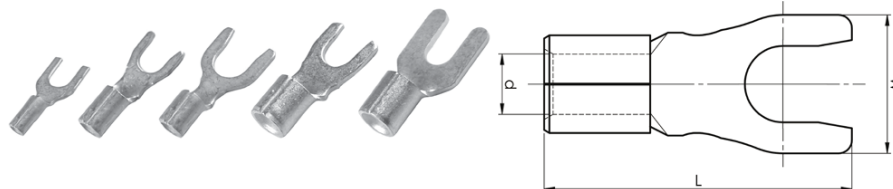


mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	L	t	s	Neck type	Tool	Pcs/ pack
0,25-0,75	24-20	B0832G	M3	5,5	1,3	13	0,5	7	Brazed	DKB0325	100
0,25-0,75	24-20	B0843G	M4	6,2	1,3	16,2	0,5	7	Brazed	DKB0325	100
0,75-1,5	20-16	B1532G	M3	5,5	1,8	14	0,7	7	Brazed	DKB0325, DKB0760	100
0,75-1,5	20-16	B1537GS	M3,5	5,5	1,8	16,2	0,7	7	Brazed	DKB0325, DKB0760	100
0,75-1,5	20-16	B1543G	M4	7	1,8	16,2	0,7	7	Brazed	DKB0325, DKB0760	100
0,75-1,5	20-16	B1553G	M5	9	1,8	18	0,7	7	Brazed	DKB0325, DKB0760	100
1,5-2,5	16-14	B2532G	M3	5,5	2,4	13	0,8	8	Brazed	DKB0325, DKB0760	100
1,5-2,5	16-14	B2543G	M4	7	2,4	16,2	0,8	8	Brazed	DKB0325, DKB0760	100
1,5-2,5	16-14	B2553G	M5	9	2,4	18	0,8	8	Brazed	DKB0325, DKB0760	100
4-6	12-10	B4643G	M4	7,8	3,4	17,4	1	9	Brazed	DKB0760, GWB4099	100
4-6	12-10	B4653G	M5	9	3,4	18	1	9	Brazed	DKB0760, GWB4099	100
10	8	B9953G	M5	10,5	4,5	24	1,1	11	Brazed	GWB4099	100
10	8	B9965G	M6	10,5	4,5	24	1,1	11	Brazed	GWB4099	100

t = palm thickness, s = strip length

Pin terminals 0.25 - 6 mm²

• Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.

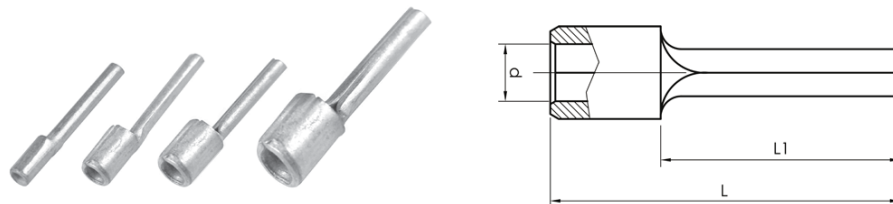

mm ² (Cu)	AWG Cu	Name	W mm	d	L	L1	s	Neck type	Tool	Pcs/ pack
0,25-0,75	24-20	B0819SR	1,8	1,3	17,5	12	7	Brazed	DKB0325	100
0,75-1,5	20-16	B1519SR	1,7	1,8	17	12	7	Brazed	DKB0325, DKB0760	100
1,5-2,5	16-14	B2519SR	1,9	2,4	17	12	8	Brazed	DKB0325, DKB0760	100
4-6	12-10	B4630SR	2,7	3,4	20,8	14	9	Brazed	DKB0760	100

s = strip length