


Receptacles rolled type 0.5 - 6 mm²

• Material: brass/Cu, tin plated Cu/Sn.

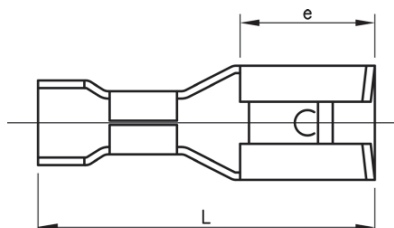


mm ² (Cu)	AWG Cu	Name	e mm	L	t	s	For tab	Tool	Pcs/ pack
0,5-1	20-18	B1003FLS5	6	14	0,25	7	2,8x0,5	DRB0115	100
0,5-1	20-18	B1003FLS8	5	12,7	0,3	7	2,8x0,8	DRB0115	100
0,75-1,5	20-16	B1505FLS5-1	6,4	16	0,4	7	4,8x0,5	GRB0560	100
0,75-1,5	20-16	B1505FLS8-1	6,4	16	0,4	7	4,8x0,8	GRB0560	100
0,75-1,5	20-16	B1507FLS1	7,6	19	0,4	7	6,3x0,8	GRB0560	100
1,5-2,5	16-14	B2505FLS5	6	15,6	0,35	8	4,8x0,5	GRB0560	100
1,5-2,5	16-14	B2505FLS8	6	16	0,4	8	4,8x0,8	GRB0560	100
1,5-2,5	16-14	B2507FLS1	7,6	19	0,4	8	6,3x0,8	GRB0560	100
4-6	12-10	B4607FLS1	7,6	19	0,4	8	6,3x0,8	GRB0560	100

t = metal thickness, s = strip length

Receptacles with locking lip rolled type 0.5 - 6 mm²

• Material: brass/Cu, tin plated Cu/Sn.

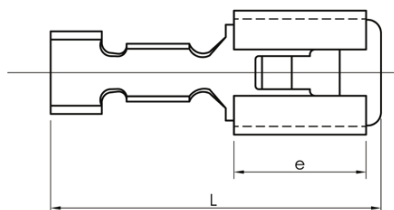

mm ² (Cu)	AWG Cu	Name	t mm	e	L	s	For tab	Tool	Pcs/ pack
0,5-1,5	20-16	B1507FLSN	0,4	7,5	19,2	7	6,3x0,8	GRB0560	100
1,5-2,5	16-14	B2507FLSN	0,4	7,5	19	8	6,3x0,8	GRB0560	100
4-6	12-10	B4607FLSN	0,4	7,5	19	9	6,3x0,8	GRB0560	100

t = metal thickness, s = strip length