

Afumex Two Bolt Cleat (LSOH)

374 series



The Plastic Two Bolt Cleat is an LUL approved two piece industrial cable cleat; it is the best choice for larger cable diameters. Both sunlight and weather resistant, the Two Bolt Cleat is resilient to corrosive environments such as oils and most chemicals.

Features and Benefits

- Suitable for use with cable diameters 50 to 94mm.
- Manufactured from LSOH Polymer.
- Designed for use with Afumex LSOH and Saffire OHLS cables.
- Low Smoke and Zero Halogen.
- Sunlight (UV) and weather resistant.
- Two-piece, two fixing design.
- Can be double stacked on common fixings.
- Operating temperature -40°C to +60°C.
- Tested in accordance with BS EN 50368.
- LUL APR Product ID 1958.

Performance Data

Test Standard	EN 50368:2003
Type	6.1.2 Non-Metallic
Impact Resistance	6.2.5 V. Heavy
Lateral Load	1.22 -> 3.485 kN
Axial Load	82 -> 110 N
Needle Flame	>120 secs



Afumex SAFFIRE^{OHLS}


Technical Data

Cable and Cleat Selection			Cleat Details				Weight (g)
Design Number	Cable Diameter		B Max	Dimensions (mm)			
	Min	Max		C	D	E	
374LSF01	50	58	89	102	45	80	174
374LSF02	56	64	93	102	45	80	158
374LSF03	62	70	98	114	45	92	174
374LSF04	68	76	104	114	50	92	210
374LSF05	74	82	110	126	50	104	254
374LSF06	80	88	118	126	50	104	264
374LSF07	86	94	121	136	60	114	326

* Technical information subject to change without notice

Method of Fixing

In all applications the cleat should be mounted on suitable M10 fixings. There is no need for any channel adaptor when mounting directly on to 'C' section channel.

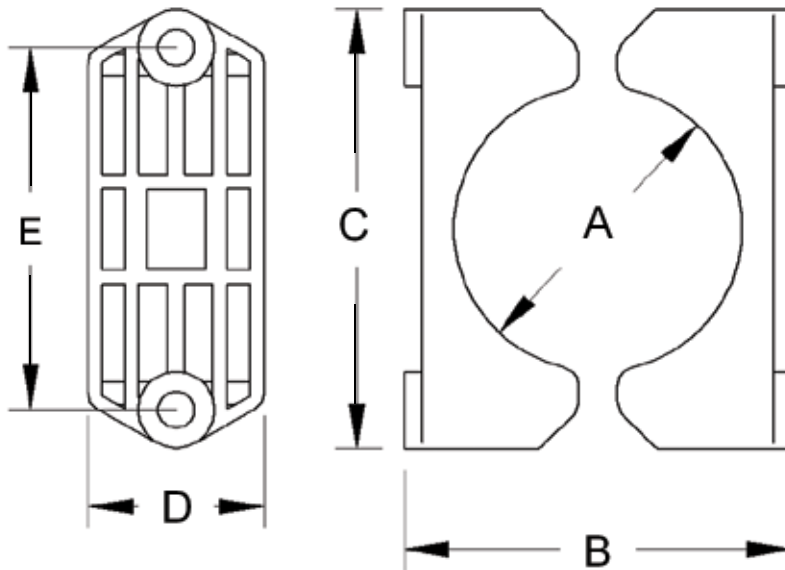

Prysmian Cables & Systems Limited,
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

Commercial Enquiries,
Sales Office Tel: 0845 767 8345,
International Sales Office Tel: +44 2380 295481

www.biconcomponents.co.uk



All Enquiries: tel: +44 (0)1744 762 929 | email: sales@etechcomponents.com | web: www.etechcomponents.com