

IM TYPES

Dutchclamp® IM cable blocks are specially designed for short-circuit resistant and safe fastening of single or multicore medium and high voltage cables. IM types are available in 5 models and suitable for cables with a diameter from 12 mm to 32 mm and 32 mm to 48 mm. They can be coupled to each other laterally by means of a dovetail joint and are stackable.

Dutchclamp® IM cable blocks are unique in their kind. The surfaces wherein the cables come to lie ensure perfect pressure distribution and maximum grip on the cables without sharp edges. In this way, there is no point load on the cables and the cables are not damaged. Dutchclamp IM cable blocks are manufactured from the highest quality glass fibre reinforced polyamide and are therefore ideally suited for installations where very high short circuit forces may occur.

The unique raw material used in manufacturing these cable clamps, makes them resistant to corrosion, ozone, frost, heat, oil, acids, salts, aggressive chemicals, UV and nuclear radiation. There is no reduction in force within temperatures from -40° C to + 125° C. (momentarily 225° C).

Dutchclamp® IM cable blocks have been tested by, among others, **UL (The Underwriters Laboratories U.S.A)**, the **Prof. Ir. Damstra laboratory (Eaton)** Voltalab Grenoble (**Schneider**) and **SGS Brussels** in accordance with the **IEC 61914** international standard.

Dutchclamp® IM cable blocks are used worldwide and are therefore available from stock. They can also be supplied with appropriate fastening material.

Dutchclamp®

Cable clamps - Cable blocks

Certified in accordance with the IEC 61914 international safety standard

Dutchclamp has been developing and producing innovative cable clamps and cable blocks for installation of low, medium and high voltage cables since 1982. The clamps have been designed in close collaboration with major energy companies.

Dutchclamp is globally renowned for its quality, service and reliability. The Dutchclamp cable clamps and cable blocks are now being successfully used in more than 50 countries around the world.

The design

By way of the specific unique model, each type of cable clamp provides an exact fit for the required short-circuit resistant installation. The raw material Dutchclamp cable clamps are produced from high-quality virgin raw materials, with glass fibre reinforced polyamide as the main ingredient. The Dutchclamp cable clamps are self extinguishing and halogen free.

The raw material

Dutchclamp cable clamps are produced from high-quality virgin raw materials, with glass fibre reinforced polyamide as the main ingredient. The Dutchclamp cable clamps are self extinguishing and halogen free.

Robustness

Owing to the unique design combined with the specific composition of the raw materials, these plastic cable clamps are among the strongest in the world. They are specially designed to withstand the normous forces that occur during short circuiting and have been tested by various laboratories.

Tests

The cable clamps have been tested by, among others, UL (The Underwriters Laboratories U.S.A), Prof. Ir. Damstra Laboratory (Eaton), Volta laboratory in Grenoble (Schneider), KEMA and SGS Brussels, in accordance with the IEC 61914 international standard.


ADVANTAGES

- Resistant to gigantic short-circuit currents / forces.
- Resistant to oils, fats, aggressive chemicals, frost, heat, UV, ozone, salt, moisture, acids, and nuclear radiation.
- Self-extinguishing UL94, Halogen free.
- Temperature range from -40 °C to 125°C. (225°C momentarily)
- Coloured black.
- No magnetism / conductivity.
- Custom mounting available.
- Fastening materials can be supplied to size.
- No oxidation / corrosion.
- No sharp angles.
- Recyclable
- Lifetime warranty
- Very simple installation.
- Available worldwide.
- Stackable
- Certified in accordance with IEC 61914






IM TYPE 3 & 4

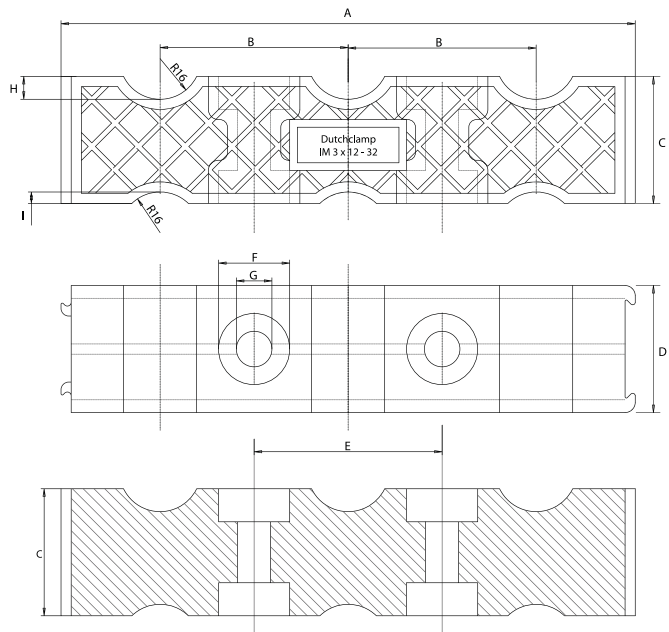

Dimensions in mm										N*
Type	A	B	C	D	E	F	G	H	I	
IM 3 x 12-32	226	74	50	50	74	28	14	9	4,5	69500
IM 3 x 32-48	260	85	65	50	85	28	14	9	9,5	69500
IM 4 x 12-32	280	74	50	50	147	28	14	9	4,5	69500
IM 4 x 32-48	345	85	65	50	170	28	14	18	10	69500

*Mechanical resistance to short-circuits in Newton

IM TYPE 6

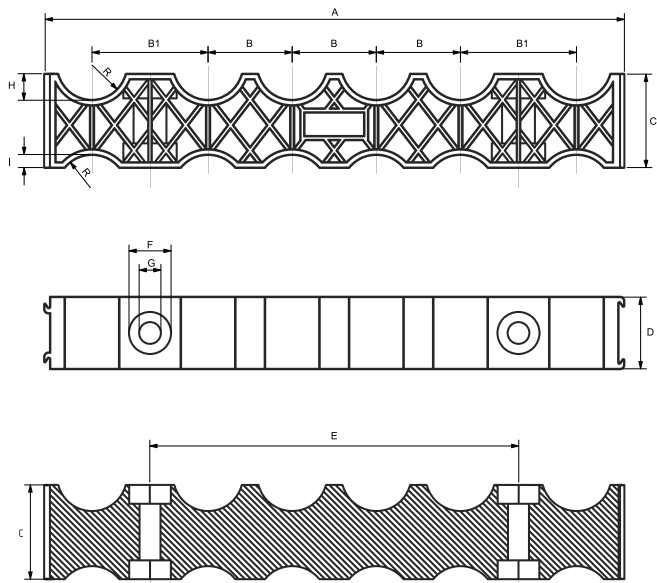

Dimensions in mm											N*	
Typ	A	B	B1	C	D	E	F	G	H	I	R	
IM 6 x 32-48	400	58	80	65	50	254	29	15	18	9	24	69500

*Mechanical resistance to short-circuits in Newton