


MALE TO MALE ADAPTOR CONNECTION PROCEDURE

In the event that the installer would like to connect an EFLEX Square unit in the opposite orientation, to have a male connector where there would usually be a female connector, the Male to Male Adaptor accessory can be used to complete the installation.




- 1 Apply lubrication to the rubber seal on the Male to Male Adaptor and the inside of the female connector of EFLEX Square, to ensure the rubber seal is seated correctly. When completed the rubber seal creates a watertight connection.

- 2 Ensure the connectors are free from dirt/debris and insert the Male to Male Adaptor into the female connector of EFLEX Square. Check that the connection is secure by pulling by hand in the opposite direction.

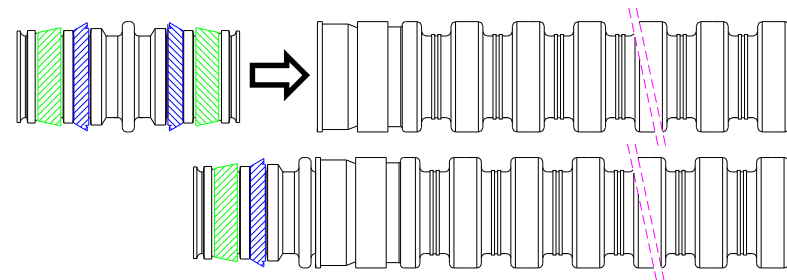

- 3 Insert the opposite end of the Male to Male Adaptor into the female connector of EFLEX Square. Check that the connection is secure by pulling by hand in the opposite direction.

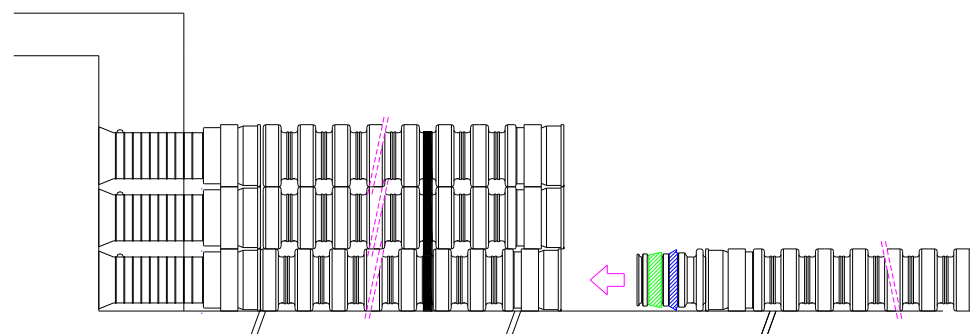

NOTE

- Connection is permanent and cannot be disconnected.
- Do not apply lubrication to the locking ring.