

Square Tape Clamps

These Wallis four-way connectors are suitable for making cross, straight through or tee joints in flat tape. The base has a countersunk hole in the middle for securing the clamp to the building surface and the lid is fixed by means of four screws.

Fix using countersunk woodscrew 1 1/2" x No. 10 and No. 10 wall plug.

For use with Bare Copper Tapes

Conductor Size mm	L mm	W mm	H mm	Unit Weight Kg	Pack Quantity	Part Number
25 x 3	50	50	13	0.15	25	JG 253
25 x 4	50	50	15	0.16	25	JG 254
25 x 6	50	50	20	0.25	25	JG 256
30 x 2	56	56	12	0.18	25	JG 302
30 x 5	56	56	17	0.20	25	JG 305
31 x 3	60	60	14	0.22	25	JG 313
31 x 6	56	56	19			JG 316
38 x 3						JG 383
38 x 6	71	71	22	0.59	25	JG 386
40 x 3	66	66	13	0.26		JG 403
40 x 4	66	66	15	0.25	20	JG 404
40 x 5	66	66	18	0.28	20	JG 405
50 x 3	80	80	16	0.50	10	JG 503
50 x 4						JG 504
50 x 6	80	80	22	0.52	10	JG 506
50 x 8	80	80	27	0.68		JG 508

Material: High Copper Alloy.

For use with Lead Covered Copper Tape

Conductor Size mm	L mm	W mm	H mm	Unit Weight Kg	Pack Quantity	Part Number
25 x 3	70	70	25	0.86	25	JPB 253 L

Material: Phosphor Bronze.

For use with Bare Aluminium Tape

Conductor Size mm	L mm	W mm	H mm	Unit Weight Kg	Pack Quantity	Part Number
25 x 3	50	50	13	0.07	25	JA 253
40 x 6	67	67	18	0.10	10	JA 406
50 x 6	77	77	20	0.15	10	JA 506


Material: Aluminium.



BS EN 62561-1 Class H



Tightening torque 6 Nm

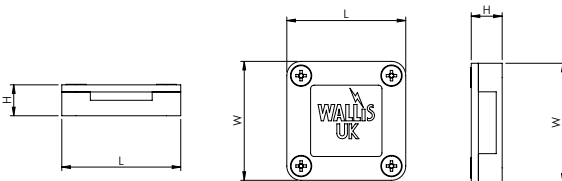

JG 253



JG 302



JA 253

