


FiloSeal+ TPG

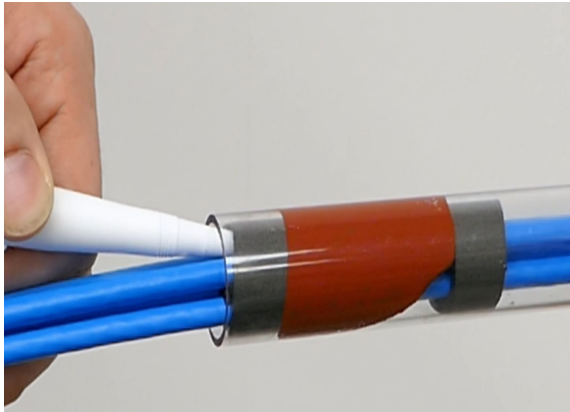

Telstra Approved Duct sealing kit in accordance with Telstra document ID TM00042A01






Seals all cable scenario's, in a TPG / Telstra 32mm duct
Gas, Water, Rodent, & Termite Protection

Flame retardant / High oxyden index - ISO 4589-2:1999

Low smoke - ISO 5659-2:2012

Features

- Telstra Approved Duct sealing kit in accordance with Telstra document ID TM00042A01
- Flexible, one component, adhesive and sealing compound in a cartridge - (310ml)
- High levels of Gas and Water tightness
- Excellent adhesion
- Re-enterable
- Flame retardant
- Resistant against Water, Alkaline, Chemical agents
- Resistant to, Petrol, Diesel, Ethanol, ASTM oil, LPG & Many more.
- Resistant to Hydrogen Sulphide / Methane and many other Gases (NedLab)
- Resistant to Rodents & termites (Mastotermes darwiniensis)
- Non-corrosive
- Solvent-free
- Shock absorbing
- Non-toxic, neutral and almost odorless
- Also suitable for limiting the EX-zones during transitions (observe chemical resistance)
- Suitable for any shaped duct /borehole/opening
- Quick and easy installation
- A complete kit for one duct
- Seals all know materials, PVC & PE sheathed cables, PILC, (HD) PE pipes
- Over 25 years of operational experience

TPG Configuration 'A' (1 x 17mmØ) & (1 x 6.5mmØ cable)	TPG Configuration 'B' (1 x 13mmØ) & (1 x 6.5mmØ cable)	TPG Configuration 'C' (1 x 13mmØ) & (2 x 6.5mmØ cables)	TPG Configuration 'D' (2 x 13mmØ cables)	TPG Configuration 'E' (1 x 17mmØ cables)
				

Products

Art.nr.	Product Name	Duct outside diameter (mm)	Configuration	Order unit
FiloSeal TPG (A)	TPG Config A	32	1x17mm+1x6,5m m	10pcs
FiloSeal TPG (B)	TPG Config B	32	1x13mm+1x6,5m m	10pcs
FiloSeal TPG (C)	TPG Config C	32	1x13mm+2x6,5m m	10pcs
FiloSeal TPG (D)	TPG Config D	32	2x13mm	10pcs
FiloSeal TPG (E)	TPG Config E	32	1x17mm	10pcs