


Duct sealing system MD I has been developed for sealing ducts containing pliable cables such as coax and rubberised cables, which can be easily bent to a right angle. This system allows these usually vulnerable cables to be sealed anywhere along a wall where the cable enters a building

Suitable for ducts with a diameter of 16mm up to 32mm and cables or pipes with a diameter up to 25mm

All our duct sealing systems are specified and used by major Electrical, Gas, & Water Utility companies in the UK and Benelux countries.

#### **Features**

- High levels of Gas and Water tightness
- Resistant to Hydrogen Sulphide / Methane and many other Gases
- Complies with ATEX regulations
- Suitable for ducts / bore holes
- Quick and easy installation
- A complete kit for one duct
- Seals all know materials, PVC & PE sheathed cables, PILC, (HD) PE pipes
- Excellent mechanical strength, after curing resistant to movements, shocks and vibrations
- Suitable for renovations, can be installed retrospectively
- Over 25 years of operational experience

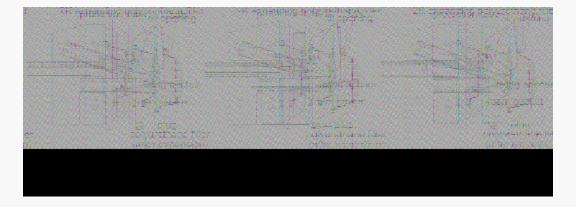



View this product at: filoform.co.uk

## **Specifications**

# **Dimensions cap**

Item number	Outer diameter	Inner diameter	Height
80221	104 mm	72 mm	30 mm
80223	132 mm	106 mm	45 mm



Properties	Unit	Value
Start time expansion	seconds	> 95
End time expansion	minutes	15
Compressive strength	N / cm²	> 100
Density 0,5bar	30 days	no leakage
Density 5m water column	30 days	no leakage
Volume consistency	cube 10 x 10cm	no change
Temperature Cycles, -20°C tot +40°C	10 consecutive cycles	no leakage
Vibration test 10 Hz/amplitude 3mm	240 hours	no leakage
Axial tensile force	diameter x 10 N	no leakage
Resistance to bending	cables 45° in 2 directions >250mm	no leakage
Expansion polyurethane foam in pipe	cm	< 40
Chemical resistance		
0,1N Na <sub>2</sub> SO <sub>4</sub>	30 days	no degradation
0,1N NaCl	30 days	no degradation
0,1N H <sub>2</sub> SO <sub>4</sub>	30 days	no degradation
0,1N NaOH	30 days	no degradation
Diesel	30 days	no degradation
Gasoline	30 days	no degradation
Resistance		
Moulds		good
Rodents		good
Shelf life	months	minimal 30



#### **More info**

Download: MSDS safety data sheet

#### **Products**

Art.nr.	Product Name	Duct diameter minmax. (mm)	Maximum cable diameter in the duct (mm)	Order unit
280220	MDI-1 25mm duct sealing kit	Ø 16-32	Ø 12,5 max.	per piece
280223P	MDI-2 50mm duct sealing kit	Ø 32-60	Ø 25 max.	per piece

