

VEHICLE CATALOGUE



GB



EXPRESS®

Certification and standards



IEC - International Electrical Commission
- issues international standards which, although not always compulsory, do have strong influence and are used as a basis within the international terminal trade.



DNV - Det Norske Veritas
Elpress KR/KS, KRF/KSF and KRT/KST terminals meet DNV's rules for classification of ships and Det Norske Veritas' Offshore Standards. The terminals are approved for installations on ships and mobile "offshore" units.



KR/KS, KRF/KSF, KRFS, KRT/KST UL approved in accordance with file no. E205350. UL certified products are delivered with UL marking on the label including the UL file number and/or certification code for control by an UL inspector. The Certificate can be downloaded at UL Product IQ.

Environment policy

Elpress products and services, are designed to minimise environmental impact, to protect limited resources and to take the life-cycle perspective into consideration in connection with:

- Product development.
- Manufacturing.
- Use and withdrawal of products.

Each and every Elpress employee shall prioritize the personal responsibility for safety, quality and the environment within his daily work routine. Information and education will constitute normal activity for increased awareness.

Our suppliers and commissioned partners are chosen and influenced in such a way that they can comply with and add value to our Policy.

Our customers are informed about our environmental dedication and our partners have all the necessary knowledge to assist and advise all parties of the distribution chain and safeguard the proper use, stocking and final disposal of our products.

We continuously evaluate the results of our Policy and openly distribute information on our work and impact on the environment.

Our environment work has resulted in Elpress being certified to ISO 14001 since 2004. Our certificate, with number EMS 531083, is issued by the internationally recognized BSI, British Standards Institution, of England.

Quality

For us, quality means trying all the time to be the best in the business. That's why we are constantly developing our products, methods and ourselves, since knowledge is perhaps the most important component for achieving the highest quality. Our work on quality has resulted in Elpress being certified to ISO 9001 since 1992.

Our certificate, with number FM20987, is issued by the internationally recognized BSI, British Standards Institution, of England.

Verification of products

There are quite a lot of different test standards and approval routines that may be applied on cable connectors and terminations. Due to this and the variation in contents between standards from different countries one has to make a selection. Elpress had previously applied primarily Swedish, UK and German standards but lately IEC and EN Standards, where the latter rapidly will substitute the old national standards. In many cases, there are also UL, DNV-Det Norske Veritas or other approvals on our products.

Table of content

What's special with Vehicle applications?	2
Pre-insulated terminals.....	3
Certified Miniforce handtools for pre-insulated terminals.....	10
Certified handtools for pre-insulated terminals.....	12
End terminals.....	13
Certified Miniforce handtools for end terminals.....	16
Cu terminals	19
Crimping with Dual System.....	28
Tools for DUAL System	29
Table stand for Cu- and Al-terminals.....	32
Accessories for crimping Cu flexible conductors with DUAL system	33
Earthing and braids.....	35
Lightweight and versatile designed pumps based on customer needs	37
Other hydraulic pumps.....	40
Crimp station for industrial crimping of KRF/KSF terminals 10 - 300 mm ²	41
Analyzer - software for analysis of crimps and system calibration	43
Some important comments on contact crimping.....	44
Standards for contact crimping.....	45
Use and safety instructions	46
Bolt joints	48
Service and maintenance	49
Development - technical services	51
General comments on the use of Elpress terminals for voltages of 12 kV and above.....	52

What's special with Vehicle applications?

Demanding applications

During several years Elpress has had contact with vehicle manufacturers of demanding applications like trains, trams, trucks, or with their sub-suppliers of cable assemblies.

In these contacts it has been more and more apparent that there is quite a spectrum of different requirements that is regarded highly relevant to the use in rolling stock.

Electrical properties

- First of all comes of course the requirements of electrical properties and mainly the current carrying capacity. These requirements must be seen in the light of high current peaks in lowest possible conductor areas and the requirements of flexible conductors.
- Vehicle applications may include tough corrosion resistance requirements.
- Vibrations as well as static loads may occur and be of the most different types. The connection must stand these loads.

Tests

Elpress has gone through which tests that may be used to verify that our terminals and connectors together with our crimp system meet the Vehicle application requirements. Together with customers the following test standards have been regarded relevant:

- Electrical properties - IEC 61238-1, Class A. This is a relatively new standard corresponding to or in many cases superceding most earlier European standards.
- Environmental requirements - DIN V 40 046, part 37. The chosen part of this German standard states a very tough test where hydrogen sulphide is used as the aggressive substance.
- Static loads normally form part of established electrical tests and this is the case also in the IEC-standard referred to above. The load limits are often rather low but in the Swedish standard SEN 245010 relatively high load limits are given and these are therefore used here.
- Vibration tests are hard to carry through in a representative manner. This is due to the very different load patterns that every build-in case may give. A European test for railway applications - EN 50155 - has been used in applicable parts.

System technology

Crimping is a System Technology. This means that it is the combination of a chosen terminal or connector and a matching crimp tool, all determined by the specific conductor that will result in the desired connection properties.



Flexible and customized test setups

Pre-insulated terminals

General information about pre-insulated terminals



System Elpress

System Elpress consists of terminals and tools that are designed and tested together to give a certified crimping result. This ensures that users will feel confident when using our systems, and that a secure connection will be achieved through the proper handling of our products.

Pre-insulated terminals

Elpress ring, fork and pin terminals are made of high-class copper 99.95%. The tab and bullet terminals are made of brass or tin-bronze. All terminals are then electrolytically tin-plated for maximum corrosion protection. The terminal's neck is brazed and annealed, which means it can be crimped in any direction. The metal in the receptacles' neck is double folded. This means that the finished terminal has excellent mechanical strength and low resistance.

Insulation material

Elpress insulation sleeves are usually made from halogen-free polycarbonate, PC, which has excellent deformation properties. Furthermore, it maintains its vibration support up to high temperatures. Caution must be exercised in case of alkaline exposure. Some types of terminals have insulation of PA, nylon, which is also halogen-free, or PVC (not halogen free). The colour of the insulation sleeve indicates the cross-sectional area that the terminal is intended for:

Bright yellow sleeve	0.1 - 0.5 mm ²
Green sleeve*	0.25 - 0.75 mm ²
Red sleeve	0.5 - 1.5 mm ²
Blue sleeve	1.5 - 2.5 mm ²
Yellow sleeve	4-6 mm ²


* or transparent white

The table below shows properties for Elpress pre-insulated terminals insulation. Note the properties are general since the influences of environment, temperature, etc. can affect the terminals. Polycarbonate, PC, and polyamide, PA, are halogen-free, i.e. they do not contain any of the substances fluoride, chlorine, bromide or iodine.

Insulation material	Max. temperature	Halogen-free	Flammability class, UL94
PA (Polyamide)	105°	Yes	V0
PC (Polycarbonate)	115°	Yes	V2
PVC (Polyvinyl chloride)	60°	No, chlorine	V0

Easy-entry

Elpress insulation sleeves are usually of the easy-entry type, which means it guides the conductor strands properly into the terminal neck. The risk of back-folded and stray strands, possibly resulting in flash-overs or reduced electrical properties, is therefore eliminated.

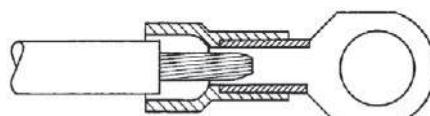

Easy-entry.

Labelling of pre-insulated terminals

Elpress pre-insulated terminals are labelled with logo, cross sectional area and any applicable screw diameter to facilitate work and controllability. When contact crimping pre-insulated terminals, Elpress crimping dies/tools leave an imprint in the insulation sleeve so that all crimped terminals can be inspected retrospectively in accordance with the requirements of many standards.



Samples of Elpress crimped pre-insulated terminals.

Designation example

Cat no. A1532R (E, FLS, G etc.)


A = pre-insulated
15 = cross sectional area (1.5 mm²)
32 = characteristic size (Hole 3.2 mm)
E = end connectors
FLS = receptacles, rolled type
FLSF = receptacles, fully insulated rolled type
FLSH = multiple tabs, rolled type (piggy back)
FLST = receptacles, rolled type, tin-bronze
G = fork terminals
GB = flanged fork terminals
H = tabs (male)
HA = bullets (male)
HO = sockets (female)
K = hook terminals
PSK = parallel connectors
R = ring terminals
SF = blade terminals
SFB = blade terminals, flanged
SFK = blade terminals, short pin
SFL = blade terminals, long pin
SFN = blade terminals, with tab
SR = pin terminals
SRK = pin terminals, short pin
SK = through connectors
SKW = through connectors with heat shrink insulation



Crimping of Elpress pre-insulated ring terminal with hand tool GSA0760.

Ring terminals 0.1 - 6 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- PC insulation has easy-entry, PC and PA are halogen-free.

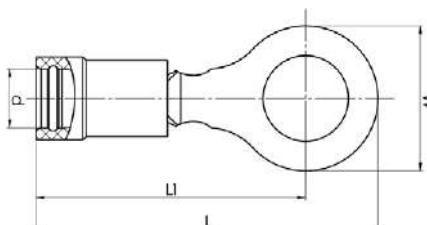

mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	L	L1	t	s	Tool	Insulation material	Easy Entry	Pcs/pack
0,1-0,5	26-20	A0522R	M2,5	5,4	2	16	14	0,5	6	DSA0115	PA	No	100
0,1-0,5	26-20	A0532R	M3	5,4	2	16	14	0,5	6	DSA0115	PA	No	100
0,1-0,5	26-20	A0543R	M4	6,5	3	19	16	0,5	6	DSA0115	PA	Yes	100
0,1-0,5	26-20	A0553R	M5	8	2	19	16	0,5	6	DSA0115	PA	Yes	100
0,25-0,75	24-20	A0832R	M3	5,5	3,2	18	15	0,5	7	DSA0115	PC	Yes	100
0,25-0,75	24-20	A0837R	M3,5	6,2	3,2	21	17,5	0,5	7	DSA0115	PC	Yes	100
0,25-0,75	24-20	A0843R	M4	7,5	3,2	21	17,5	0,5	7	DSA0115	PC	Yes	100
0,25-0,75	24-20	A0853R	M5	9	3,2	22	17,5	0,5	7	DSA0115	PC	Yes	100
0,5-1,5	20-16	A1532R	M3	5,5	4	19	16	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1537R	M3,5	6	4	19	16	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1543R	M4	7	4	20,5	17	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1553R	M5	9	4	22,5	18	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1565R	M6	11	4	26,5	21	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1585R	M8	14	4	27,5	20	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1510R	M10	16,5	4	30,5	22	0,7	7	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2532R	M3	5,5	4,5	19	16	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2537R	M3,5	6,2	4,5	19	16	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2543R	M4	7	4,5	21	17,5	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2553R	M5	9	4,5	23	18	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2565R	M6	11	4,5	26	20,5	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2585R	M8	14	4,5	28	21	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2510R	M10	16,5	4,5	30,5	22	0,75	8	GSA0760	PC	Yes	100
1,5-2,5	15-14	A2513R	M12	18	4,3	34	26	0,75	8	GSA0760	PA	Yes	100
4-6	12-10	A4643R	M4	7,8	6,4	24,5	20,5	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4653R	M5	9	6,4	25	20,5	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4665R	M6	11	6,4	28,5	23	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4685R	M8	14	6,4	30,5	23,5	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4610R	M10	17	6,4	34	25,5	1	9	GSA0760	PC	Yes	50
4-6	12-10	A4613R	M12	19,2	6,8	40	31	1	9	GSA0760	PC	Yes	50


t = palm thickness, s = strip length



EXPRESS

Fork terminals 0.1 - 6 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- PC insulation has easy-entry, PC and PA are halogen-free.

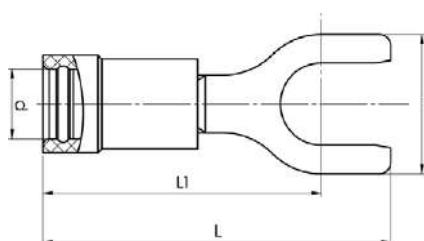


mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	L	L1	t	s	Tool	Insulation material	Easy Entry	Pcs/pack
0,1-0,5	26-20	A0532G	M3	5,5	3,2	18	15	0,5	6	DSA0115	PA	No	100
0,25-0,75	24-20	A0832G	M3	5,5	3,2	18	15	0,5	7	DSA0115	PC	Yes	100
0,25-0,75	24-20	A0837G	M3,5	6,2	3,2	21	17,5	0,5	7	DSA0115	PC	Yes	100
0,25-0,75	24-20	A0843G	M4	6,2	3,2	21	17,5	0,5	7	DSA0115	PC	Yes	100
0,5-1,5	20-16	A1532G	M3	5,5	4	19	16	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1537G	M3,5	6,2	4	21	17,5	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1537GS	M3,5	5,5	4	21,2	17	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1543G	M4	7	4	21	17,5	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1553G	M5	9	4	22,5	18	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1565G	M6	11	4	26,5	21	0,7	7	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2532G	M3	5,5	4,5	18	15	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2537G	M3,5	6,2	4,5	21	17,5	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2537GS	M3,5	5,5	4,5	21,2	17	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2543G	M4	7	4,5	21	17,5	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2553G	M5	9	4,5	23	18	0,8	8	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2565G	M6	11	4,5	25	19,5	0,8	8	GSA0760	PC	Yes	100
4-6	12-10	A4643G	M4	7,8	6,4	24	20	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4653G	M5	9	6,4	25	20,5	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4665G	M6	11	6,4	27	21,5	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4685G	M8	14	6,4	30	23	1	9	GSA0760	PC	Yes	100
4-6	12-10	A4610G	M10	18	6,4	36	27,5	1	9	GSA0760	PA	Yes	100

t = palm thickness, s = strip length

Flanged fork terminals 0.5 - 2.5 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- PC insulation has easy-entry, PC is halogen free.

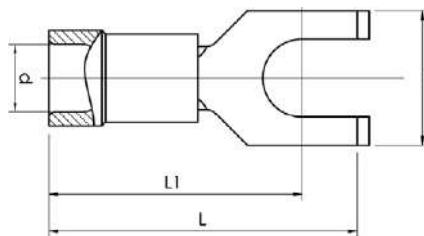


mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	L	L1	t	s	Tool	Insulation material	Easy Entry	Pcs/pack
0,5-1,5	20-16	A1537GB	M3,5	6,2	4	21	17,5	0,7	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1543GB	M4	6,2	4	21	17,5	0,7	7	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2543GB	M4	6,2	4,5	21	17,5	0,8	7	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2553GB	M5	9	4,5	22,5	17,5	0,8	7	GSA0760	PC	Yes	100

t = palm thickness, s = strip length

Hook terminals 0.5 - 2.5 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- PC insulation has easy-entry, PC is halogen free.

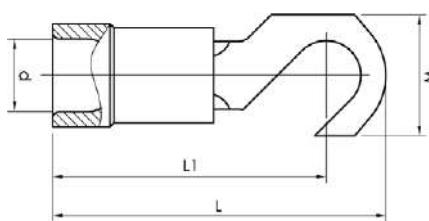


mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	L	L1	t	s	Tool	Insulation material	Easy Entry	Pcs/pack
0,5-1,5	20-16	A1543K	M4	7	4	20,5	17	0,7	7	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2543K	M4	7,5	4,5	21	17	0,8	8	GSA0760	PC	Yes	100

t = palm thickness, s = strip length

Pin terminals 0.1 - 6 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- PC insulation has easy-entry, PC and PA are halogen-free.

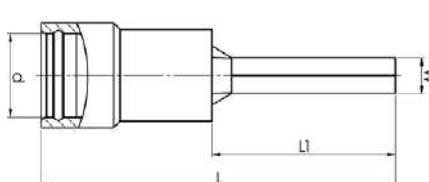


mm ² (Cu)	AWG Cu	Name	W mm	d	L	L1	s	Tool	Insulation material	Easy Entry	Pcs/pack
0,1-0,5	26-20	A0514SR	1,2	2,2	18	8	6	DSA0115	PA	No	100
0,25-0,75	24-20	A0819SR	1,8	3,2	22	12	7	DSA0115	PC	Yes	100
0,25-0,75	24-20	A0819SRK	1,8	3,2	18,5	8,5	7	DSA0115	PC	Yes	100
0,5-1,5	20-16	A1519SR	1,7	4	22	12	7	GSA0760	PC	Yes	100
0,5-1,5	20-16	A1519SRK	1,7	4	18,5	8,5	7	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2519SR	1,9	4,5	21,5	11,5	8	GSA0760	PC	Yes	100
1,5-2,5	16-14	A2519SRK	1,9	4,5	18,5	8,5	8	GSA0760	PC	Yes	100
4-6	12-10	A4630SR	2,7	6,4	27	14	9	GSA0760	PC	Yes	100

s = strip length

Blade terminals 0.25 - 6 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- PC insulation has easy-entry, PC is halogen free.

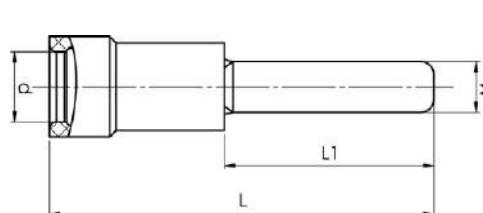


mm ² (Cu)	AWG Cu	Name	W mm	d	L	L1	t	s	Insulation material	Easy Entry	Tab	Tool	Pcs/pack
0,25-0,75	24-20	A0825SFK	2,5	3,2	20	10	0,5	7	PC	Yes	No	DSA0115	100
0,5-1,5	20-16	A1518SFL	2,3	4,0	27,2	18	0,8	7	PVC	Yes	No	GSA0760	100
0,5-1,5	20-16	A1529SF	2,9	4	22	12	0,7	7	PC	Yes	No	GSA0760	100
0,5-1,5	20-16	A1529SFn	2,9	4	22	12	0,7	7	PC	Yes	Yes	GSA0760	100
0,5-1,5	20-16	A1530SFB	3	4	25,8	16,8	0,8	7	PVC	Yes	No	GSA0760	100
1,5-2,5	16-14	A2524SFL	2,3	4,5	27,2	18	0,8	8	PVC	Yes	No	GSA0760	100
1,5-2,5	16-14	A2529SF	2,9	4,3	21,5	11,5	0,8	8	PC	Yes	No	GSA0760	100
1,5-2,5	16-14	A2529SFn	2,9	4,3	22	12	0,8	8	PC	Yes	Yes	GSA0760	100
1,5-2,5	16-14	A2530SFB	3	4,5	25,8	16,8	0,7	8	PVC	Yes	No	GSA0760	100
4-6	12-10	A4640SF	4	6,8	27,5	13,5	1	9	PVC	Yes	No	GSA0760	100
4-6	12-10	A4645SFB	4,6	6,8	30,3	16,8	1	9	PVC	No	No	GSA0760	100

t = palm thickness, s = strip length

Receptacles rolled type 0.1 - 6 mm²

- Material: brass, tin plated Cu/Sn, brazed neck.
- PC and PA insulation have easy-entry, PC and PA are halogen-free.

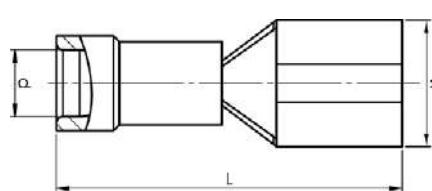


mm ² (Cu)	AWG Cu	Name	W mm	d	L	s	For tab	Tool	Insulation material	Neck type	Easy Entry		Pcs/ pack
0,1-0,5	26-20	A0503FLS5	3,7	2,2	16,4	7	2,8x0,5	DSA0115	PVC	Brazed	Yes	Brass, Cu/Sn	100
0,1-0,5	26-20	A0503FLS8	3,7	2,2	16,4	7	2,8x0,8	DSA0115	PVC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1503FLS5	3,2	4	18	7	2,8x0,5	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1503FLS8	3,2	4,0	18	7	2,8x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1505FLS5	5	3,2	19,5	7	4,8x0,5	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1505FLS8	5	3,2	19,5	7	4,8x0,8	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1507FLS	7,6	4	20,5	7	6,3x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
0,5-1,5	20-16	A1507FLST	7,6	4	20,5	7	6,3x0,8	GSA0760	PC	Brazed	Yes	Tin bronze (phosphor bronze), Cu/Sn	100
1,5-2,5	16-14	A2505FLS5	5,6	4,5	20	8	4,8x0,5	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
1,5-2,5	16-14	A2505FLS8	5	3,9	19,5	8	4,8x0,8	GSA0760	PA	Brazed	Yes	Brass, Cu/Sn	100
1,5-2,5	16-14	A2507FLS	7,6	4,5	20,5	8	6,3x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
1,5-2,5	16-14	A2507FLST	7,6	4,5	20,5	8	6,3x0,8	GSA0760	PC	Brazed	Yes	Tin bronze (phosphor bronze), Cu/Sn	100
4-6	12-10	A4607FLS	7,6	6,4	24	9	6,3x0,8	GSA0760	PC	Brazed	Yes	Brass, Cu/Sn	100
4-6	12-10	A4609FLS	10,9	6,6	30,1	9	9,5x1,2	GSA0760	PA	Reinforcement sleeve	Yes	Brass, Cu/Sn	100

s = strip length

Through connectors 0.25 - 6 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, contact sleeve of Cu pipe
- Halogen-free PC insulation without Easy-entry.

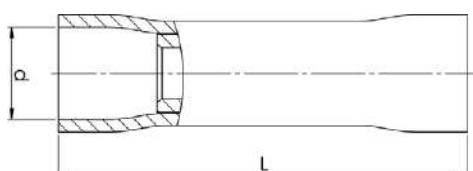


mm ² (Cu)	AWG Cu	Name	d mm	L	s	Tool	Insulation material	Easy Entry	Pcs/pack
0,25-0,75	24-20	A0824SK	2,9	24,5	7	DSA0115	PC	No	100
0,5-1,5	20-16	A1525SK	3,4	24	7	GSA0760	PC	No	100
1,5-2,5	16-14	A2527SK	4,3	26	8	GSA0760	PC	No	100
4-6	12-10	A4652SK	6,5	33	9	GSA0760	PC	No	50

s = strip length

Through connectors with heat shrink insulation 0.5 - 6 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, contact sleeve of Cu pipe.
- Insulation of halogen-free PA, hot melt adhesive inside the insulation.

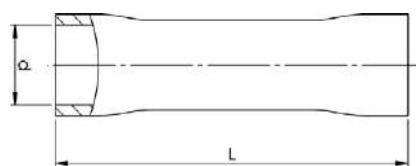

mm ² (Cu)	AWG Cu	Name	d mm	L	s	Tool	Insulation material	Pcs/pack
0,5-1,5	20-16	A1535SKW	3,7	31,5	8	GSW0560C	PA	25
1,5-2,5	16-14	A2535SKW	4,6	31,5	8	GSW0560C	PA	25
4-6	12-10	A4650SKW	6,5	37,5	9	GSW0560C	PA	25

s = strip length


After crimping and heating with a hot air gun, a water proof terminal, glued to the cable and the connector, is achieved.



EXPRESS

Parallel through connectors 0.5 - 6 mm²

- Material: Cu 99.95%, tin plated Cu/Sn, contact sleeve of Cu pipe.
- Insulation of halogen-free PA.

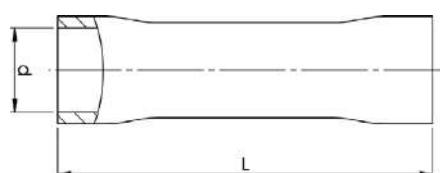

mm ² (Cu)	AWG Cu	Name	d mm	L	s	Tool	Insulation material	Pcs/pack
0,5-1,5	20-20	A1515PSK	3,2	17	7	GSA0760	PA	100
1,5-2,5	16-16	A2517PSK	4	17	8	GSA0760	PA	100
4-6	12-10	A4634PSK	5,6	21	9	GSA0760	PA	100

s = strip length

Type PSK must be crimped with GSA0760 (C) and with two crimps.

Certified Miniforce handtools for pre-insulated terminals




Properties:

- locking function which only releases once crimping is complete
- emergency release if the crimping process has to be interrupted
- symmetrical and clearly marked crimping positions
- adjustable for changes after long use
- tested with Elpress terminals
- unique mechanism that reduces maximum handle force from 450 N right down to 250 N (model C)
- ergonomic handle suitable for all users
- maximises the quality of work
- reduces the risk of occupational injuries
- light and versatile design without sacrificing on strength
- model C has extra long handles for the use of two hands
- withstands at least 80,000 crimps
- supplied with certificate for basic quality monitoring



Crimp geometry

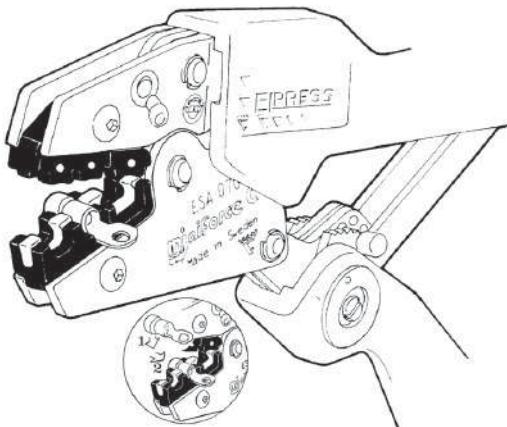

Follow procedures (1) and (2) when attaching the terminal in the locator on tool GSA0760(C).

GSA0760 and GSA0760C

Tested and certified mechanical Miniforce hand tools for symmetrical crimping of pre-insulated terminals 0.5-6 mm².

Special properties:

- locator that holds the terminal in the right position when crimping and facilitates work in, for example, tight spaces
- die nests are easily checked with die nest gauge, ESAQ0760

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
0,5-6	20-10	GSA0760	Oval	0,548	203	76
0,5-6	20-10	GSA0760C	Oval	0,607	256	80



ELPRESS



GSEA0340C



Tested and certified mechanical Miniforce hand tool for crimping pre-insulated terminals 0.5-2.5 mm² as well as pre-insulated and uninsulated end sleeves 0.25-4 mm².

mm ²	AWG	Name	Crimp geometries	Net weight (kg)	Length mm	Width
0,5-2,5 / 0,25-4	20-14 / 22-12	GSEA0340C	Oval, Trapezoid	0,613	256	80

Crimp geometries



GSW0560C



Tested and certified mechanical Miniforce hand tool for crimping 0.5-6 mm² through connectors with heat shrink insulation of the SKW type.

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
0,5-6	20-10	GSW0560C	Oval	0,612	256	80

Crimp geometry



Certified handtools for pre-insulated terminals



Properties:

- crimping positions are clearly marked
- adjustable for changes after long use
- tested with Elpress terminals
- locking function that ensures a complete crimp
- emergency release if the crimping process has to be interrupted
- unique design that makes the tools thin and versatile
- minimal muscle strength required for complete crimp
- suitable for both right and left-handed users
- withstands at least 50,000 crimps
- supplied with certificate for basic quality monitoring



DSA0115



Crimp geometry



Tested and certified mechanical hand tool for symmetrical crimping of pre-insulated terminals 0.14-1.5 mm².

Special properties:

- easy to check red die nests easily with die nest gauge, ESAQ0760

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
0,14-1,5	26-16	DSA0115	Oval	0,445	192	66



DSA0725



Crimp geometry



Tested and certified mechanical hand tool for symmetrical crimping of pre-insulated terminals 0.5-2.5 mm².

Special properties:

- die nests are easily checked with die nest gauge, ESAQ0760

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
0,5-2,5	20-14	DSA0725	Oval	0,449	192	66

ESAQ0760 - die nest gauge

Go/no-go gauge for inspection of die nests in the following tools: DSA0115, DSA0725, GSA0760(C), GSEA0340C.



Special properties:

- handle part Ø 8 mm
- easy to check tool die nest
- The go and no go dimensions are checked in the die nests upon calibration.
Contact Elpress for more information on calibration and quality management

mm ²	AWG	Name	Net weight (kg)	Shaft Ø	Length mm
0,5-2,5	20-14	ESAQ0760	0,024	8	55

Tool	Die nests
DSA0115	Red
DSA0725	Red
GSA0760(C)	Blue
GSEA0340(C)	Yellow



ELPRESS

End terminals

General information about end terminals



System Elpress


System Elpress consists of terminals and tools that are adapted and tested together for best performance. This ensures that users will feel confident when using our systems, and that a secure terminal is achieved through the proper handling of our products.

Using an Elpress crimping tool when crimping an Elpress end terminal means that a terminal is obtained according to DIN 57609.


End sleeves

Elpress pre-insulated and uninsulated end terminals are made of 99.95% copper and are tin plated. The end terminals have dimensions according to DIN 46228 with a few exceptions (see note in tables). The insulation boot is made of PP (polypropylene) and has a shape comparable to easy-entry, see image. Elpress end terminals are used when you need a perfect connection for the cable end.


With Elpress end terminals you avoid splayed conductors and reduce the risk of cable breaks. Moreover, they create a lasting contact pressure and a large contact area.

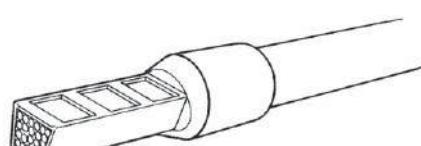

Crimped End terminal.

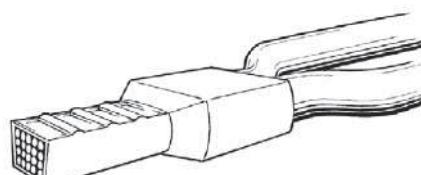

Crimped TWIN end terminal.

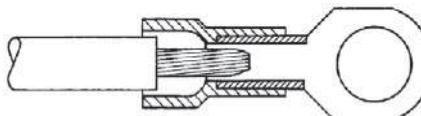

Easy-entry.

Designation example

Cat. no. A4-12ET

A = pre-insulated

B = uninsulated

4 = area (4 mm²)

12 = Length metal sleeve

ET = end terminal

ET2 = TWIN end terminal



CSA certification

CSA, Canadian Standards Association, is a Canadian organisation that certifies products according to US standards. Elpress end sleeves of type A..ET / ETT / ETD, B..ET, A...ET2/ETT2/ETW2 is CSA certified according to US standard C22.2 No 158 and UL 1059 according to file No. 247206. End terminals of the type A..ET/B...ET/A...ET2 are intended for stranded Cu-conductors 26 AWG to 500 MCM, equivalent to the metric sizes 0.14 mm² to 240 mm². To be used together with Elpress crimping tool.

Colour codes for pre-insulated end terminals and TWIN-end terminals

AWG	Area mm ²	Standard colour W Elpress type ET	Colours acc. to DIN 46228 Elpress type ETD	Alternative colour T type ETT
26	0,14	grey	grey	brown
24	0,25	light blue	yellow	violet
22	0,34	turquoise	turquoise	pink
20	0,50	orange	white	white
18	0,75	white	grey	blue
17	1	yellow	red	red
15	1,5	red	black	black
13	2,5	blue	blue	grey
11	4	grey	grey	orange
9	6	black	yellow	green
7	10	ivory	red	brown
5	16	green	blue	white
3	25	brown	yellow	black
2	35	beige	red	red
1/0	50	olive-green	blue	blue
2/0	70	yellow	yellow	yellow
3/0	95	red	red	red
250	120	blue	blue	blue
300	150	yellow	yellow	yellow

Pre-insulated end terminals 0.14 - 50 mm² ET standard colour




- Material: Cu 99.95%, tin plated Cu/Sn, CSA approved.
- Polypropylene insulation, colour code W.

mm ² (Cu)	AWG Cu	Name	d mm	L	L1	s	Measures acc DIN46228	Tool	Pcs/ pack
0,14	26	A0,14-6ET	1,9	10	6	8	Yes	PEB0110T	500
0,14	26	A0,14-8ET	1,9	12	8	10	No	PEB0110T	500
0,25	24	A0,25-6ET	1,9	10	6	8	No	PEB0110T	100
0,25	24	A0,25-8ET	1,9	12	8	10	No	PEB0110T	500
0,34	22	A0,34-6ET	1,9	10	6	8	No	PEB0110T	100
0,34	22	A0,34-8ET	1,9	12	8	10	No	PEB0110T	100
0,5	20	A0,5-6ET	2,4	12	6	8	Yes	PEB0110T	100
0,5	20	A0,5-8ET	2,4	14	8	10	Yes	PEB0110T	100
0,5	20	A0,5-10ET	2,4	156	10	12	Yes	PEB0110T	100
0,75	20	A0,75-6ET	2,8	12	6	8	Yes	PEB0110T	100
0,75	20	A0,75-8ET	2,8	14	8	10	Yes	PEB0110T	100
0,75	20	A0,75-10ET	2,8	16	10	12	Yes	PEB0110T	100
0,75	20	A0,75-12ET	2,8	18	12	14	Yes	PEB0110T	100
1	18	A1-6ET	3	12	6	8	Yes	PEB0110T	100
1	18	A1-8ET	3	14	8	10	Yes	PEB0110T	100
1	18	A1-10ET	3	16	10	12	Yes	PEB0110T	100
1	18	A1-12ET	3	18	12	14	Yes	PEB0110T	100
1,5	16	A1,5-6ET	3,3	12	6	8	No	PEB0110T	500
1,5	16	A1,5-8ET	3,3	14	8	10	Yes	PEB0110T	100
1,5	16	A1,5-10ET	3,3	16	10	12	Yes	PEB0110T	100
1,5	16	A1,5-12ET	3,3	18	12	14	Yes	PEB0110T	500
1,5	16	A1,5-18ET	3,3	24	18	20	Yes	PEB0110T18	100
2,08	14	A2,08-8ET	3,5	14	8	10	No	PEB0110T	500
2,5	14	A2,5-8ET	4,2	15	8	10	Yes	PEB0110T	100
2,5	14	A2,5-10ET	4,1	17	10	12	Yes	PEB0110T	500
2,5	14	A2,5-12ET	4,2	19	12	14	Yes	PEB0110T	100
2,5	14	A2,5-18ET	4,2	25	18	20	Yes	PEB0110T18	100
4	12	A4-10ET	4,8	17	10	12	Yes	PEB0110T	100
4	12	A4-12ET	4,8	20	12	14	Yes	PEB0110T	100
4	12	A4-18ET	4,8	26	18	20	Yes	PEB0110T18	100
6	10	A6-12ET	6,1	20	12	14	Yes	PEB0110T	100
6	10	A6-18ET	6,1	26	18	20	Yes	PEB0110T18	100
10	8	A10-12ET	7,4	21	12	14	Yes	GEB1025	100
10	8	A10-18ET	7,4	27	18	20	Yes	GEB1025	100
16	6	A16-12ET	8,8	23	12	14	Yes	GEB1025	100
16	6	A16-18ET	8,8	29	18	20	Yes	GEB1025	100
25	4	A25-16ET	10,9	29	16	18	Yes	GEB1025	50
25	4	A25-18ET	10,9	31	18	20	Yes	GEB1025	50
25	4	A25-22ET	10,9	35	22	24	Yes	GEB1025	50
35	2	A35-16ET	12,3	30	16	18	Yes	GEB3550	50
35	2	A35-18ET	12,3	32	18	20	Yes	GEB3550	50
35	2	A35-25ET	12,3	39	25	27	Yes	GEB3550	50
50	1/0	A50-20ET	15	36	20	22	Yes	GEB3550	50
50	1/0	A50-25ET	15	41	25	27	Yes	GEB3550	25

s = strip length

We can also offer end terminals with other colour codes and areas over 50 mm².

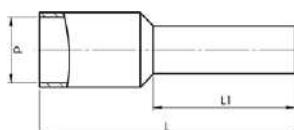

EXPRESS

Pre-insulated TWIN-end terminals 2 x 0.5 - 2 x 10 mm² ET2 standard colour code




- Material: Cu 99.95%, tin plated Cu/Sn. CSA approved.
- Polypropylene insulation, colour code according to DIN 46228.

mm ² (Cu)	AWG Cu	Name	d mm	D	H	L	L1	s	Tool	Pcs/ pack
2 x 0,5	2x20	A0,5-6ET2	1,5	4,5	2,3	13	6	8	PEB0110T	100
2 x 0,5	2x20	A0,5-8ET2	1,5	4,5	2,3	15	8	10	PEB0110T	100
2 x 0,75	2x20	A0,75-8ET2	1,8	5,1	2,6	15	8	10	PEB0110T	100
2 x 0,75	2x20	A0,75-10ET2	1,8	5,1	2,6	17	10	12	PEB0110T	100
2 x 0,75	2x20	A0,75-12ET2	1,8	5,1	2,6	19	12	14	PEB0110T	100
2 x 1	2x18	A1-8ET2	2	5,1	3	15	8	10	PEB0110T	100
2 x 1	2x18	A1-10ET2	2	5,1	3	17	10	12	PEB0110T	100
2 x 1	2x18	A1-12ET2	2	5,1	3	19	12	14	PEB0110T	100
2 x 1,5	2x16	A1,5-8ET2	2,3	6,4	3,5	16	8	10	PEB0110T	100
2 x 1,5	2x16	A1,5-12ET2	2,3	6,4	3,5	20	12	14	PEB0110T	100
2 x 2,5	2x14	A2,5-10ET2	2,9	7,5	4	18,5	10	12	PEB0110T	100
2 x 2,5	2x14	A2,5-13ET2	2,9	7,5	4	21,5	13	15	PEB0110T18	100
2 x 4	2x12	A4-12ET2	3,8	8,6	4,9	23	12	14	GEB4010C-TWIN, PEB0110T	100
2 x 4	2x12	A4-18ET2	3,8	8,6	4,9	29	18	20	GEB4010C-TWIN, PEB0110T18	100
2 x 6	2x10	A6-14ET2	4,6	9,6	5,8	25	14	16	GEB4010C-TWIN, PEB0110T18	100
2 x 6	2x10	A6-18ET2	4,6	9,6	5,8	29	18	20	GEB4010C-TWIN, PEB0110T18	100
2 x 10	2x8	A10-14ET2	6,5	12,6	7	26	14	16	GEB4010C-TWIN	100

s = strip length

Use the tool socket closest to the total area of the terminal.

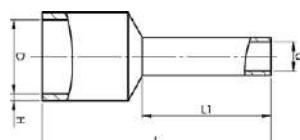

Certified Miniforce handtools for end terminals



Properties:

- locking function which only releases once crimping is complete
- emergency release if the crimping process has to be interrupted
- adjustable in case of changes due to long-term use
- tested with Elpress terminals
- ergonomic handle suitable for all users
- maximises the quality of work
- reduces the risk of occupational injuries
- light and versatile design without compromising durability
- model C has extra long handles for the use of two hands
- withstands at least 80,000 crimps
- supplied with certificate for basic quality monitoring



GSEA0340C



Crimp geometries



Tested and certified mechanical Miniforce hand tool for crimping pre-insulated terminals 0.5-2.5 mm² as well as pre-insulated and uninsulated end sleeves 0.25-4 mm².

mm ²	AWG	Name	Crimp geometries	Net weight (kg)	Length mm	Width
0,5-2,5 / 0,25-4	20-14 / 22-12	GSEA0340C	Oval, Trapezoid	0,613	256	80



GEB4010C-TWIN



Crimp geometry



Tested and certified mechanical Miniforce hand tool for crimping pre-insulated TWIN end terminals 2 x 4-2 x 10 mm².

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
4-10	12-8	GEB4010C-TWIN	Trapezoid	0,618	256	80



PZD3



Crimp geometry



Tested and certified mechanical hand tool for crimping end terminals 0.5-6 mm² and insulated TWIN end terminals 2 x 0.5-2 x 4 mm².

Special properties:

- a crimp mode that automatically adjusts itself
- front-fed
- can handle crimp lengths up to 17 mm

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
0,5-6	20-10	PZD3	Rectangle	0,472	192	66



ELPRESS



GEB4010C



Tested and certified mechanical Miniforce hand tool for crimping end terminals 4-10 mm².

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
4-10	12-8	GEB4010C	Trapezoid	0,615	256	80

Crimp geometry



GEB1025 and GEB1025C



Tested and certified mechanical Miniforce hand tools for crimping end terminals 10-25 mm².

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
10-25	8-4	GEB1025	Trapezoid	0,558	203	76
10-25	8-4	GEB1025C	Trapezoid	0,62	256	80

Crimp geometry



GEB3550 and GEB3550C



Tested and certified mechanical Miniforce hand tools for crimping end terminals 35-50 mm².

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length mm	Width
35-50	2-1/0	GEB3550	Trapezoid	0,558	203	76
35-50	2-1/0	GEB3550C	Trapezoid	0,614	256	80

Crimp geometry





PEB0110T and PEB0110T18



Tested and certified mechanical Miniforce hand tools for crimping end terminals 0.14-10 mm².

Special properties:

- rotating die
- front and side feed

mm ²	AWG/MCM (Cu)	Name	Crimp geometry	Net weight (kg)	Length	Width
0,14-10	26-8	PEB0110T	Trapezoid	0,385	180	65
0,14-10	26-8	PEB0110T18	Trapezoid	0,300	180	25

Crimp geometry



PEB0116H



Tested and certified mechanical Miniforce hand tool for crimping end terminals 0.14-16 mm² with hexagonal crimping.

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length	Width
0,14-16,0	26-6	PEB0116H	Hexagonal	0,379	176	62

Crimp geometry



PEB0116S



Tested and certified mechanical Miniforce hand tool for crimping end terminals 0.14-16 mm² with square crimping.

mm ²	AWG	Name	Crimp geometry	Net weight (kg)	Length	Width
0,14-16,0	26-6	PEB0116S	Square	0,371	176	62

Crimp geometry


EXPRESS

Cu terminals

General information about Elpress Cu-terminals



System Elpress

System Elpress consists of terminals and tools that are designed and tested together to give a certified crimping result. This ensures that users will feel confident when using our systems, and that a secure connection is achieved through the proper handling of our products. By using Elpress Cu-connection elements together with one of Elpress crimp systems one obtains a connection that has been tested according to the requirements of IEC 61238:1.



Cu terminals

Elpress copper connectors are made of pure copper 99.95%. We manufacture tube terminals type KR/KRF/KRD/KRT, through connectors type KS/KSF/KSD/KST for stranded conductors, IEC 60228 class 2, and multi-stranded conductors IEC 60228 class 5 such as C-sleeves primarily pre-splicing of Cu-lines and many customised products. For flexible and stranded Cu conductors, terminals of type KR/KRF and through connectors of type KS/KSF are used. Terminals type KRD/KRT and through connectors type KSD/KST are normally used for stranded Cu conductors from and including 500 mm². Terminals of type KR/KRF/KRD/KRT are used mainly in termination to bus bars and apparatus of copper, while through connectors, of type KS/KSF/KSD/KST, are used mainly in the splicing of copper conductors in cable assemblies. They can also be used for straight splicing of earth conductors. With a branching sleeve, type C, one splices and branches earth conductors, lightning conductor installations and the like.



UL-approved terminals

KR/KS, KRF/KSF, KRFS, KRT/KST UL approved in accordance with file no. E205350. UL certified products are delivered with UL marking on the label including the UL file number and/or certification code for control by an UL inspector. The certificate can be downloaded at UL Product IQ.




DNV-approved terminals


Elpress KR/KS, KRF/KSF and KRT/KST terminals meet DNV's rules for classification of ships and Det Norske Veritas' Offshore Standards. The terminals are approved for installations on ships and mobile "offshore" units.

Number of crimps

Normally one crimp is required up to and including 150 mm² and two or three crimps for larger areas. Note, however, that another number of crimps may be needed in some cases, see tables for tool dies. If possible, crimps should be placed next to each other with a couple of mm spacing between each one. Overlap is sometimes inevitable.

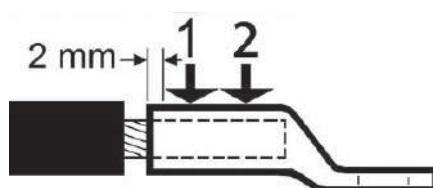

Crimp sequence for two crimps.

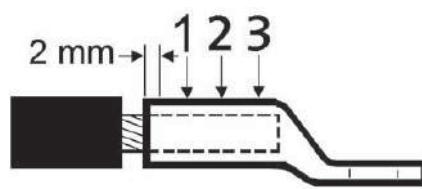

Crimp sequence for three crimps.

Marking of Cu terminals

Elpress marking system for copper terminals shows logotype, cable area and type number for hexagonal die. This system allows checks that the correct tools have been used when contact crimping because the die number automatically becomes embossed during the contact crimping.



Marking tube terminals

25 (on neck)
Type No. for hexagonal die
(Elpress logo) 150 12 F (on the palm)
150 = Cu conductor in mm²
12 = Hole size
F = KRF



Marking through connectors

Elpress Logo
Type No. for hexagonal die
16 F (possible screened conductor area and earthing sign)
16 = Cu conductor in mm²
F = KSF



Marking C-sleeves (example C70-95)

Area marking (side 1)
25-120 / 140-190
min - max (mm² per conductor) / min - max
(total mm² in the sleeve)
Elpress logo, Die number (side 2)
BCx, "x" corresponds to die number


KRFS tube terminals with narrow palm 50 - 400 mm²

- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole
- For stranded (class 2) and multi-stranded (class 5) Cu conductors.
- For multi-stranded Cu conductors Elpress recommends the DUAL system.
- Easy to install via cable gland, allows for pre-installation.
- The width of the palm is less than or as wide as the neck.
- UL-approved, DNV approved.



Example of marking KRFS: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die no. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.

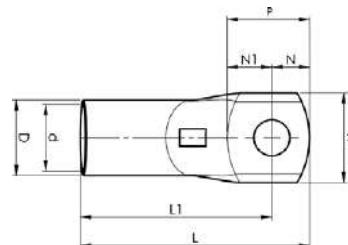

mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	D	N	N1	P	L	L1	t	s	Tool	Pcs/ pack	Die
50	1/0	KRFS50-6	M6	15	11	14,5	11	11,5	22,5	51	40	4	19	PVL350, V600, DV1300, DV250	100	14,5
50	1/0	KRFS50-8	M8	16,5	11	14,5	11	11,5	22,5	51	40	3,8	19	PVL350, V600, DV1300, DV250	100	14,5
50	1/0	KRFS50-10	M10	16,5	11	14,5	11	12,5	23,5	52	41	3,8	19	PVL350, V600, DV1300, DV250	100	14,5
70	2/0	KRFS70-6	M6	17	13	17	11	12,5	23,5	58	47	4,5	22	PVL350, V600, DV1300, DV250	50	17
70	2/0	KRFS70-8	M8	17	13	17	11	12,5	23,5	58	47	4,5	22	PVL350, V600, DV1300, DV250	50	17
70	2/0	KRFS70-10	M10	19	13	17	11	12,5	23,5	58	47	3,9	22	PVL350, V600, DV1300, DV250	50	17
95	4/0	KRFS95-6	M6	19	15	20	11	14	25	63	52	5,7	25	V600, DV1300, DV250	50	20
95	4/0	KRFS95-8	M8	19	15	20	11	14	25	63	52	5,7	25	V600, DV1300, DV250	50	20
95	4/0	KRFS95-10	M10	19	15	20	11	14	25	63	52	5,7	25	V600, DV1300, DV250	50	20
95	4/0	KRFS95-12	M12	20	15	20	12	15	27	64	52	5,4	25	V600, DV1300, DV250	50	20
120	250	KRFS120-6	M6	19	17	22	11	13,5	24,5	67	56	5,9	27	V600, DV1300, DV250	25	22
120	250	KRFS120-8	M8	19	17	22	11	13,5	24,5	67	56	5,9	27	V600, DV1300, DV250	25	22
120	250	KRFS120-10	M10	19	17	22	11	13,5	24,5	67	56	5,9	27	V600, DV1300, DV250	25	22
120	250	KRFS120-12	M12	22	17	22	12	15	27	70	58	5	27	V600, DV1300, DV250	25	22
150	300	KRFS150-6	M6	25	19	25	11	14	25	74	63	6,3	32	V600, DV1300, DV250	25	25
150	300	KRFS150-8	M8	25	19	25	11	14	25	74	63	6,3	32	V600, DV1300, DV250	25	25
150	300	KRFS150-10	M10	25	19	25	11	14	25	74	63	6,3	32	V600, DV1300, DV250	25	25
150	300	KRFS150-12	M12	25	19	25	12	15	27	76	64	6,3	32	V600, DV1300, DV250	25	25
185	350	KRFS185-10	M10	27	21	27	11	13	24	79	68	6,6	37	DV1300, DV250	20	27
185	350	KRFS185-12	M12	27	21	27	12	15	27	82	70	6,6	37	DV1300, DV250	20	27
240	500	KRFS240A-10	M10	29	22,5	29	15	19	34	91	76	7,7	37	DV1300, DV250	10	30
240	500	KRFS240A-12	M12	29	22,5	29	15	19	34	91	76	7,7	37	DV1300, DV250	10	30
240	500	KRFS240A-16	M16	29	22,5	29	20	19	39	96	76	7,7	37	DV1300, DV250	10	30
300	600	KRFS300A-10	M10	31	24,5	31,5	15	19	34	94	79	8,6	40	DV1300, DV250	10	32
300	600	KRFS300A-12	M12	31	24,5	31,5	15	19	34	94	79	8,6	40	DV1300, DV250	10	32
300	600	KRFS300A-16	M16	31	24,5	31,5	20	19	39	99	79	8,6	40	DV1300, DV250	10	32
400	800	KRFS400A-12	M12	38	30	38	15	24	39	114	99	8,8	52	DV1300, DV250	10	38
400	800	KRFS400A-16	M16	38	30	38	20	39	39	114	94	8,8	52	DV1300, DV250	10	38

t = palm thickness, s = strip length



Easy to install via cable gland.


KRF tube terminals with two holes 16 - 400 mm²

- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole
- For stranded (class 2) and multi-stranded (class 5) Cu conductors.
- For multi-stranded Cu conductors Elpress recommends the DUAL system.
- UL approved (16-400 mm²), DNV approved (see note).



Example of marking KRF: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die No. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.

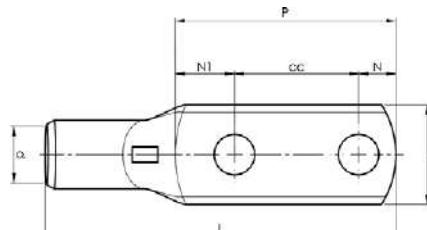

mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	N	N1	P	cc	L	t	s	Tool	Pcs/ pack	Die	Note
16	6	KRF16-6X2-16	M6x2	13	6	6,5	8,5	31	16	50	2,8	11	PVL350, V600, DV1300, V250	100	9	
16	6	KRF16-10X2-40	M10x2	16	6	11	11	62	40	81	2,2	11	PVL350, V600, DV1300, V250	100	9	
16	6	KRF16-10X2-24-26	M10x2	16	6	11	19	55	25	75	2,2	11	PVL350, V600, DV1300, V250	100	9	
25	4	KRF25-6X2-16	M6x2	16	8	6,5	8,5	31	16	54	2,9	13	PVL350, V600, DV1300, V250	100	11	
25	4	KRF25-8X2-40	M8x2	16	8	9,5	10,5	60	40	81	2,8	13	PVL350, V600, DV1300, V250	100	11	
25	4	KRF25-10X2-40	M10x2	18	8	11	19	70	40	93	2,5	14	PVL350, V600, DV1300, V250	100	11	
25	4	KRF25-14X2-40	M14x2	22	8	15	17	72	40	94	1,8	13	DV1300, V250, V600, PVL350	100	11	
35	2	KRF35-10X2-24-26	M10x2	18	9	11	16	52	25	78	3,9	16	PVL350, V600, DV1300, DV250	100	13	
35	2	KRF35-10X2-40	M10x2	20	9	11	19	70	40	95	3,5	16	PVL350, V600, DV1300, DV250	100	13	
50	1/0	KRF50-10X2-24-26	M10x2	21	11	11	16	52	25	82	3,4	19	PVL350, V600, DV1300, DV250	100	14,5	
50	1/0	KRF50-10X2-40	M10x2	21	11	11	19	70	40	100	3,3	19	PVL350, V600, DV1300, DV250	100	14,5	
70	2/0	KRF70-10X2-24-26	M10x2	25	13	11	17	53	25	86	3,9	22	PVL350, V600, DV1300, DV250	50	17	
70	2/0	KRF70-12X2-40	M12x2	25	13	12	18	70	40	103	3,9	22	PVL350, V600, DV1300, DV250	25	17	DNV approved
95	4/0	KRF95-10X2-24-26	M10x2	29	15	11	19	55	25	93	4,9	25	V600, DV1300, DV250	25	20	
95	4/0	KRF95-12X2-40	M12x2	29	15	12	18	70	40	107	4,9	25	V600, DV1300, DV250	25	20	DNV approved
120	250	KRF120-10X2-24-26	M10x2	32	17	11	19	55	25	97	4,9	27	V600, DV1300, DV250	25	22	
120	250	KRF120-12X2-40	M12x2	32	17	12	19	71	40	113	4,9	27	V600, DV1300, DV250	25	22	DNV approved
150	300	KRF150-10X2-24-26	M10x2	36	19	11	19	55	25	104	5,9	32	V600, DV1300, DV250	25	25	
150	300	KRF150-12X2-40	M12x2	36	19	12	19	71	40	120	5,9	32	V600, DV1300, DV250	20	25	DNV approved
185	350	KRF185-10X2-24-26	M10x2	39	21	11	21	57	25	111	5,9	37	DV1300, DV250	20	27	
185	350	KRF185-12X2-40	M12x2	39	21	12	20	72	40	126	5,9	37	DV1300, DV250	20	27	DNV approved
240	500	KRF240A-10X2-24-26	M10x2	42	22,5	11	22	58	25	115	6,4	37	DV1300, DV250	10	30	
240	500	KRF240A-12X2-40	M12x2	42	22,5	12	21	73	40	130	6,4	37	DV1300, DV250	10	30	DNV approved
300	600	KRF300A-12X2-40	M12x2	46	24,5	12	22	74	40	133	6,8	40	DV1300, DV250	5	32	DNV approved
400	750	KRF400A-12X2-40	M12x2	56	30	12	23	75	40	145	7,8	52	DV1300, DV250	1	38	DNV approved

t = palm thickness, s = strip length



ELPRESS


KRF angled terminals 45° 10 - 150 mm²

- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole
- For stranded (class 2) and multi-stranded (class 5) Cu conductors.
- For multi-stranded Cu conductors Elpress recommends the DUAL system.
- UL approved (35-150 mm²). DNV approved (16-150 mm²).



Example of marking KRF: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die No. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.

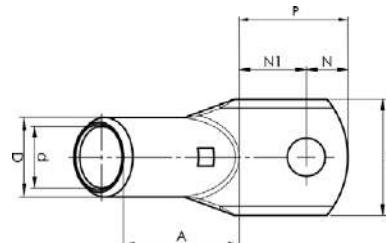

mm ² (Cu)	AWG Cu	Name	Screw	W mm	d	D	N	N1	P	A	t	s	Tool	Pcs/ pack	Die
10	8	KR10-6-45GR	M6	13	5	8	6,5	11,5	20,5	19	2,3	11	PVL350, V600, DV1300, DV250	100	8
10	8	KR10-8-45GR	M8	13,5	5	8	8,5	12	18	19	2,2	11	PVL350, V600, DV1300, DV250	100	8
16	6	KRF16-6-45GR	M6	13	6	9	6,5	11,5	18	23	2,9	12	PVL350, V600, DV1300, DV250	100	9
16	6	KRF16-8-45GR	M8	13	6	9	8,5	12	20,5	23	2,7	12	PVL350, V600, DV1300, DV250	100	9
16	6	KRF16-10-45GR	M10	16	6	9	11,5	13,5	25	23	2,3	12	PVL350, V600, DV1300, DV250	100	9
25	4	KRF25-6-45GR	M6	16	8	11	6,5	11,5	18	24	2,7	13	PVL350, V600, DV1300, DV250	100	11
25	4	KRF25-8-45GR	M8	16	8	11	8,5	12	20,5	24	2,7	13	PVL350, V600, DV1300, DV250	100	11
25	4	KRF25-10-45GR	M10	17	8	11	11,5	13,5	25	23	2,9	13	PVL350, V600, DV1300, DV250	100	11
35	2	KRF35-6-45GR	M6	18	9	13	6,5	11,5	16	30	3,9	16	PVL350, V600, DV1300, DV250	100	13
35	2	KRF35-8-45GR	M8	18	9	13	8,5	12	20,5	30	3,9	16	PVL350, V600, DV1300, DV250	100	13
35	2	KRF35-10-45GR	M10	18	9	13	11,5	13,5	25	30	3,9	16	PVL350, V600, DV1300, DV250	100	13
50	1/0	KRF50-8-45GR	M8	21	11	14,5	8,5	17,5	26	31	3,4	19	PVL350, V600, DV1300, DV250	100	14,5
50	1/0	KRF50-10-45GR	M10	21	11	14,5	11,5	18,5	30	31	3,4	19	PVL350, V600, DV1300, DV250	100	14,5
50	1/0	KRF50-12-45GR	M12	21	11	14,5	12,5	19,5	32	31	3,3	19	PVL350, V600, DV1300, DV250	100	14,5
70	2/0	KRF70-8-45GR	M8	24	13	17	8,5	17,5	26	35	3,9	22	PVL350, V600, DV1300, DV250	50	17
70	2/0	KRF70-10-45GR	M10	24	13	17	11,5	18,5	30	35	3,9	22	PVL350, V600, DV1300, DV250	50	17
70	2/0	KRF70-12-45GR	M12	24	13	17	12,5	19,5	32	35	3,9	22	PVL350, V600, DV1300, DV250	50	17
95	4/0	KRF95-10-45GR	M10	28	15	20	11,5	18,5	30	40	4,9	25	V600, DV1300, DV250	50	20
95	4/0	KRF95-12-45GR	M12	28	15	20	12,5	19,5	32	40	4,9	25	V600, DV1300, DV250	50	20
95	4/0	KRF95-16-45GR	M16	29	15	20	15,5	20,5	36	40	4,8	25	V600, DV1300, DV250	50	20
120	250	KRF120-10-45GR	M10	32	17	22	11,5	18,5	30	43	4,9	27	V600, DV1300, DV250	25	22
120	250	KRF120-12-45GR	M12	32	17	22	12,5	19,5	32	43	4,9	27	V600, DV1300, DV250	25	22
120	250	KRF120-16-45GR	M16	32	17	22	15,5	20,4	35,9	43	4,9	27	V600, DV1300, DV250	25	22
150	300	KRF150-10-45GR	M10	36	19	25	11,5	18,5	30	49	5,8	32	V600, DV1300, DV250	25	25
150	300	KRF150-12-45GR	M12	36	19	25	12,5	19,5	32	49	5,8	32	V600, DV1300, DV250	25	25
150	300	KRF150-16-45GR	M16	36	19	25	15,5	20,5	36	49	5,8	32	V600, DV1300, DV250	25	25

t = palm thickness, s = strip length



KRF angled terminals 90° 10 - 150 mm²

- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole
- For stranded (class 2) and multi-stranded (class 5) Cu conductors.
- For multi-stranded Cu conductors Elpress recommends the DUAL system.
- UL approved (35-150 mm²). DNV approved (16-150 mm²).



Example of marking KRF: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die No. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.

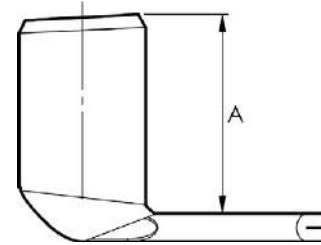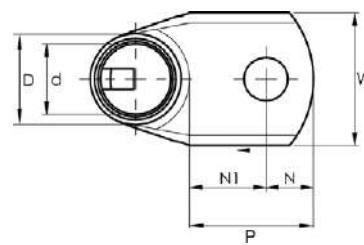

mm ² (Cu)	AWG Cu	Name	Screw	W	d	D	N	N1	P	A	t	s	Tool	Pcs/ pack	Die
10	8	KR10-6-90GR	M6	13	5	8	6,5	11,5	18	15	2,3	11	PVL350, V600, DV1300, DV250	100	8
10	8	KR10-8-90GR	M8	13,5	5	8	8,5	12	20,5	15	2,2	11	PVL350, V600, DV1300, DV250	100	8
16	6	KRF16-6-90GR	M6	13	6	9	6,5	11,5	18	16,5	2,9	12	PVL350, V600, DV1300, DV250	100	9
16	6	KRF16-8-90GR	M8	13	6	9	8,5	12	20,5	16,5	2,7	12	PVL350, V600, DV1300, DV250	100	9
25	4	KRF25-6-90GR	M6	16	8	11	6,5	11,5	18	18,5	2,7	13	PVL350, V600, DV1300, DV250	100	11
25	4	KRF25-8-90GR	M8	16	8	11	8,5	12	20,5	18,5	2,7	13	PVL350, V600, DV1300, DV250	100	11
25	4	KRF25-10-90GR	M10	17	8	11	11,5	13,5	25	18,5	2,9	13	PVL350, V600, DV1300, DV250	100	11
35	2	KRF35-6-90GR	M6	18	9	13	6,5	11,5	18	22,5	3,9	16	PVL350, V600, DV1300, DV250	100	13
35	2	KRF35-8-90GR	M8	18	9	13	8,5	12	20,5	22,5	3,9	16	PVL350, V600, DV1300, DV250	100	13
35	2	KRF35-10-90GR	M10	18	9	13	11,5	13,5	25	22,5	3,9	16	PVL350, V600, DV1300, DV250	100	13
50	1/0	KRF50-8-90GR	M8	21	11	14,5	8,5	17,5	26	30,5	3,4	19	PVL350, V600, DV1300, DV250	100	14,5
50	1/0	KRF50-10-90GR	M10	21	11	14,5	11,5	18,5	30	30,5	3,3	19	PVL350, V600, DV1300, DV250	100	14,5
50	1/0	KRF50-12-90GR	M12	21	11	14,5	12,5	19,5	32	30,5	3,3	19	PVL350, V600, DV1300, DV250	100	14,5
70	2/0	KRF70-8-90GR	M8	24	13	17	8,5	17,5	26	31,5	3,9	22	PVL350, V600, DV1300, DV250	50	17
70	2/0	KRF70-10-90GR	M10	24	13	17	11,5	18,5	30	31,5	3,9	22	PVL350, V600, DV1300, DV250	50	17
70	2/0	KRF70-12-90GR	M12	24	13	17	12,5	19,5	32	31,5	3,9	22	PVL350, V600, DV1300, DV250	50	17
95	4/0	KRF95-10-90GR	M10	28	15	20	11,5	18,5	30	32,5	4,9	25	V600, DV1300, DV250	50	20
95	4/0	KRF95-12-90GR	M12	28	15	20	12,5	19,5	32	32,5	4,9	25	V600, DV1300, DV250	50	20
95	4/0	KRF95-16-90GR	M16	29	15	20	15,5	20,5	36	32,5	4,8	25	V600, DV1300, DV250	50	20
120	250	KRF120-8-90GR	M8	32	17	22	8,5	17,5	26	42	4,9	27	V600, DV1300, DV250	25	22
120	250	KRF120-8-90GR-SB	M8	32	17	22	8,5	17,5	26	34,5	4,9	27	V600, DV1300, DV250	25	22
120	250	KRF120-10-90GR	M10	32	17	22	11,5	18,5	30	42	4,9	27	V600, DV1300, DV250	25	22
120	250	KRF120-10-90GR-SB	M10	32	17	22	11,5	18,5	30	34,5	4,9	27	DV250	25	22
120	250	KRF120-12-90GR	M12	32	17	22	12,5	19,5	32	42	4,9	27	V600, DV1300, DV250	25	22
120	250	KRF120-12-90GR-SB	M12	32	17	22	12,5	19,5	32	34,5	4,9	27	DV250	25	22
120	250	KRF120-16-90GR	M16	32	17	22	15,5	20,5	36	42	4,9	27	V600, DV1300, DV250	25	22
120	250	KRF120-16-90GR-SB	M16	32	17	22	15,5	20,5	36	34,5	4,9	27	DV250	25	22
150	300	KRF150-10-90GR	M10	36	19	25	11,5	18,5	30	47	5,9	32	V600, DV1300, DV250	25	25
150	300	KRF150-10-90GR-SB	M10	36	19	25	11,5	18,5	30	37,5	5,9	32	DV250	25	25
150	300	KRF150-12-90GR	M12	36	19	25	12,5	19,5	32	47	5,9	32	V600, DV1300, DV250	25	25
150	300	KRF150-12-90GR-SB	M12	36	19	25	12,5	19,5	32	37,5	5,9	32	DV250	25	25
150	300	KRF150-16-90GR-LB	M16	36	19	25	15,5	20,5	36	47	5,9	32	V600, DV1300, DV250	25	25
150	300	KRF150-16-90GR-SB	M16	36	19	25	15,5	20,5	36	37,5	5,9	32	DV250	25	25
185	350	KRF185-10-90GR-SB	M10	39	21	27	11,5	18,5	30	42,5	5,9	37	V1300, V250	25	27
185	350	KRF185-12-90GR-SB	M12	39	21	27	12,5	19,5	32	42,5	5,9	37	V1300, V250	25	27
185	350	KRF185-16-90GR-SB	M16	39	21	27	15,5	20,5	36	42,5	5,9	37	V1300, V250	25	27

t = palm thickness, s = strip length, SB = short barrel



ELPRESS


KS/KSF through connectors 0.75 - 800 mm²

- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole and int. cable stop.
- For stranded (class 2) and multi-stranded (class 5) Cu conductors.
- For multi-stranded Cu conductors Elpress recommends the DUAL system.
- UL approved (1-500 mm²). DNV approved (16-400 mm²).



Examples of marking: 20 95F (Elpress logotype is included on the marking.)

20 = Die No. 95 = mm² F = type KSF for stranded and flexible conductors 111 = screen mm²

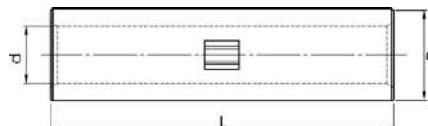

mm ² (Cu)	AWG Cu	Name	Screen conductor	d mm	D	L	s	Tool	Pcs/ pack	Die
0,75	(22)-18	KS0,75		1,3	2,8	14	7	DKB0325, DKB0760	100	
1,5	(18)-16	KS1,5		1,8	3,3	14	7	DKB0325, DKB0760	100	
2,5	(16)-14	KS2,5		2,3	4,2	16	8	DKB0325, DKB0760	100	
4	12	KS4		3	5	19	9	GWB4099, ES2258	100	
6	10	KS6		4	6	19	9	GWB4099, ES2258	100	
10	8	KS10		5	8	30	15	GWB4099, ES2258, PVL350, V600, DV1300	100	8
16	6	KSF16	15	6	9	35	17	ES2258, PVL350, V600, DV1300	100	9
25	4	KSF25	21-29	8	11	35	17	ES2258, PVL350, V600, DV1300	100	11
35	2	KSF35	41	9	13	35	17	PVL350, V600, DV1300, DV250	100	13
50	1/0	KSF50	57	11	14,5	45	22	V600, DV1300, DV250	50	14,5
70	2/0	KSF70	72-88	13	17	45	22	V600, DV1300, DV250	50	17
95	4/0	KSF95	111	15	20	45	25	V600, DV1300, DV250	50	20
120	250	KSF120		17	22	55	27	V600, DV1300, DV250	50	22
150	300	KSF150		19	25	65	32	V600, DV1300, DV250	25	25
185	350	KSF185		21	27	70	35	DV1300, DV250	25	27
240	500	KSF240A		22,5	29	70	35	DV1300, DV250	25	30
300	600	KSF300A		24,5	31,5	75	37	DV1300, DV250	10	32
400	750	KSF400A		30	38	100	50	DV1300, DV250	10	38
500	1000	KSF500		33	42	135	68	DV250, V1470	5	42
630	1000	KSF630		39	53	175	88	DV250, V1470	3	53
800	1000	KSF800		42,5	53	175	88	DV250, V1470	2	53

s = strip length


KS/KSF through connectors with partition 10-500 mm²

- Material: Cu 99.95%, tin plated Cu/Sn.
- For stranded (class 2) and multi-stranded (class 5) Cu conductors.
- For multi-stranded Cu conductors Elpress recommends the DUAL system.
- With partition to prevent oil leakage.
- UL approved (1-500 mm²). DNV approved (16-400 mm²).



Examples of marking: 20 95F (Elpress logotype is included on the marking)

20 = Die No. 95 = mm² F = type KSF for stranded and flexible conductors 111 = screen mm²

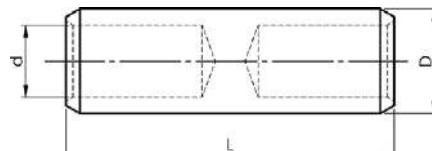

mm ² (Cu)	AWG Cu	Name	Screen conductor	d mm	D	L	s	Tool	Pcs/ pack	Die
10	8	KS10M		5	8	36	18	ES2258, PVL350, V600, DV1300	100	8
16	6	KSF16M	15	6	9	37	18	ES2258, PVL350, V600, DV1300	100	9
25	4	KSF25M	21-29	8	11	38	18	ES2258, PVL350, V600, DV1300	100	11
35	2	KSF35M	41	9	13	41	19	PVL350, V600, DV1300, DV250	100	13
50	1/0	KSF50M	57	11	14,5	48	22	PVL350, V600, DV1300, DV250	50	14,5
70	2/0	KSF70M	72-88	13	17	49	22	PVL350, V600, DV1300, DV250	50	17
95	3/0	KSF95M	111	15	20	56	25	V600, DV1300, DV250	50	20
120	250	KSF120M		17	22	63	28	V600, DV1300, DV250	50	22
150	300	KSF150M		19	25	64	28	V600, DV1300, DV250	25	25
185	350	KSF185M		21	27	74	32	DV1300, DV250	25	27
240	500	KSF240AM		22,5	29	76	32	DV1300, DV250	1	30
300	600	KSF300AM		24,5	31,5	88	37	DV1300, DV250	1	32
400	750	KSF400AM		30	38	105	45	DV1300, DV250	1	38
500	1000	KSF500M		33	42	135	54	DV250, V1470	1	42

s = strip length






ELPRESS

Crimping with Dual System

DUAL system

This system has been developed to meet the hard combine requirements from manufacturers with tough applications with the best result.

The DUAL technology combines the desired properties from an optimal hexagonal crimp with those of a limited indent crimp. This results in tight contact surfaces without damage to the conductor strands.

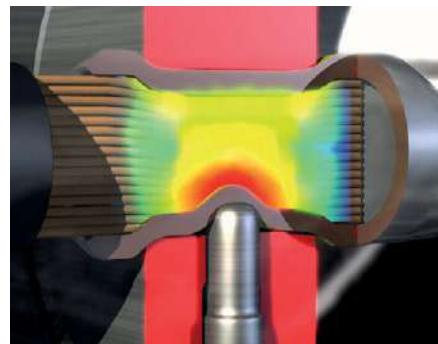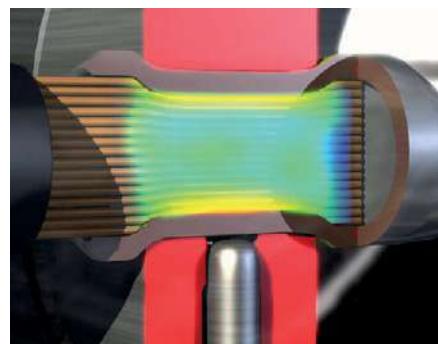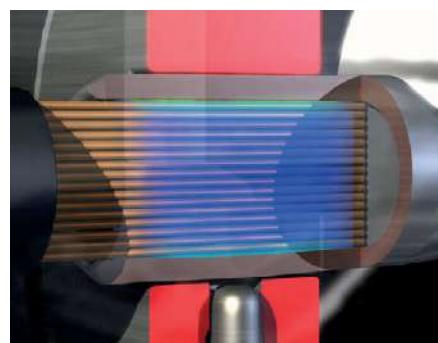

The patented Elpress Dual system

We call this technology, which is patented, the Elpress DUAL System where the name points at split crimp sequence that starts with a hexagonal crimp and, without separation of the dies, is finished by an additional indent crimp.

Tools for DUAL crimping



The DUAL crimp is performed by crimp tools PVX1300, PVX1300C2, crimp heads DV1300, DV1300C2 or DV250 using the crimp dies DBxx available from 10 to 400 mm². The crimp heads are powered by the normal Elpress hydraulic pumps P4000 (foot pump), PS710 (mains and battery operated hydraulic pump) or P1000 (mains powered pump).

Check measures

An effective way to check correct crimps during work is to perform measurements of achieved crimp heights, N-measures in the following table, regularly or as first and last piece inspection.

N measures

Area mm ²	Die (for DV1300 & PVX1300)	Die (for DV1300C2 & PVX1300C2)	Die (for DV250)	N-measure mm
10	13DB8	13DCB8		6,7
16	13DB9	13DCB9		7,5
25	13DB11	13DCB11		9,0
35	13DB13	13DCB13		10,6
50	13DB14,5	13DCB14,5		11,8
70	13DB17	13DCB17		13,6
95	13DB20	13DCB20		16,0
120	13DB22	13DCB22	DB2522	17,7
150	13DB25	13DCB25	DB2525	20,3
185	13DB27	13DCB27	DB2527	21,7
240	13DB30	13DCB30	DB2530	23,9
300	13DB32	13DCB32	DB2532	25,7
400			DB2538	30,5

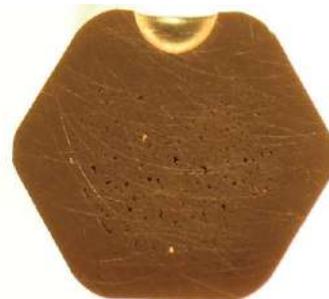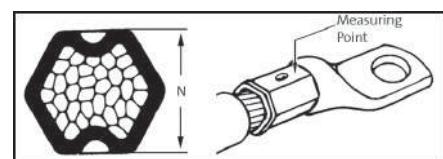

Cross section of DUAL crimp

Tools for DUAL System

PVX1300/PVX1300DB

Tested and certified battery-powered crimp gun for contact crimping Cu-terminals, type KR/KRT 10 mm², KS/KST 10 mm², KRF/KRD/KRT 16-400 mm², KSF/KSD/KST 16-400 mm², Al-terminals 16-400 mm² (-240 solid), DIN 46235 10-300 mm², C sleeves up to 240 mm² total area (C95-120).



Properties:

- ergonomic design ensures optimum balance in the user's hand
- crimp monitoring with warning light and signal when the correct pressure/full crimp is not achieved
- LED work lighting
- possibility of documentation of each crimp for unique service control
- crimp force 124 kN (13 tonnes)
- crimps/charging: 60-120 depending on size and temperature
- crimp time: 4-12s depending on size
- usage temperature -20°C to +40°C
- Li-Ion Makita, 5.0 Ah, 18V
- charger Li-Ion Makita, charging time 22 min 110-240VAC 50-60Hz
- DUAL: 10 - 300 mm²



Crimp geometries



mm ² (Cu)	mm ² (Stranded Al)	mm ² (Solid Al)	Name	Crimp geometries	Net weight (kg)	Length mm	Width	Height	Delivered
10-400	16-400	16-240	PVX1300	Punch, Dual, Hexagonal, Oval	6,7	412	319	75	in standard case
10-400	16-400	16-240	PVX1300DB	Punch, Dual, Hexagonal, Oval	7,3	412	319	75	with 2 batteries
10-400	16-400	16-240	PVX1300-ADV	Punch, Dual, Hexagonal, Oval	14,2	412	319	75	in CASE ADV
10-400	16-400	16-240	PVX1300DB-ADV	Punch, Dual, Hexagonal, Oval	14,2	412	319	75	with 2 batteries and CASE ADV
10-400	16-400	16-240	PVX1300-WOBC-ADV	Punch, Dual, Hexagonal, Oval	12,4	412	319	75	in CASE ADV and without Battery/Charger
10-300	16-400	16-240	PVX1300-US	Punch, Dual, Hexagonal, Oval	6,7	412	319	75	with battery and US-charger
10-300	16-400	16-240	PVX1300DB-US	Punch, Dual, Hexagonal, Oval	7,3	412	319	75	with 2 batteries and US-charger
10-400	16-400	16-240	PVX1300-WOBC	Punch, Dual, Hexagonal, Oval	4,8	412	319	75	without Battery/Charger

PVX1300C2/PVX1300C2DB

Tested and certified battery-powered crimp gun for crimping Cu-terminals, type KR/KRF and KS/KSF 10-400 mm², C-sleeves up to 240 mm² total area (C95-120).

Properties:

- ergonomic design ensures optimum balance in the user's hand
- crimp monitoring with warning light and signal when the correct pressure/full crimp is not achieved
- LED work lighting
- possibility of documentation of each crimp for unique service control
- crimp force 124 kN (13 tonnes)
- usage temperature -20°C to +40°C
- Li-Ion Makita, 5.0 Ah, 18V
- charger Li-Ion Makita, charging time 22 min 110-240VAC 50-60Hz
- DUAL: 10 - 300 mm²



Crimp geometries



mm ² (Cu)	Name	Crimp geometries	Net weight (kg)	Length	Width	Height	Delivered
10-400	PVX1300C2	Dual, Hexagonal, Oval	7,5	399	319	75	in standard case
10-400	PVX1300C2DB	Dual, Hexagonal, Oval	8,1	399	319	75	with 2 batteries
10-400	PVX1300C2-ADV	Dual, Hexagonal, Oval	15,1	399	319	75	in CASE ADV
10-400	PVX1300C2DB-ADV	Dual, Hexagonal, Oval	15,1	399	319	75	2 batteries and CASE ADV
10-400	PVX1300C2-US	Dual, Hexagonal, Oval	5,6	399	319	75	With US charger
10-400	PVX1300C2DB-US	Dual, Hexagonal, Oval	6,2	399	319	75	with battery and US-charger
10-400	PVX1300C2-WOBC	Dual, Hexagonal, Oval	5,6	399	319	75	without Battery/Charger



V1300



Tested and certified crimp head for crimping Cu-terminals, type KR/KRT 10 mm², KS/KST 10 mm², KRF/KRD/KRT 16-400 mm², KSF/KSD/KST 16-400 mm², Al-terminals 16-400 mm² (-240 solid), DIN 46235 10-300 mm², C sleeves up to 240 mm² total area (C95-120). Used in combination with foot pump P4000 or the electrically powered pump PS710 (battery powered version of PS710E is also available).

Properties:

- working pressure 63 MPa (630 bar)
- crimp force 130 kN (13 tonnes)
- versatile and easy-to-use steel crimp head

mm ² (Cu)	mm ² (Stranded Al)	mm ² (Solid Al)	Name	Crimp geometries	Net weight (kg)	Length mm	Width	Height
10-400	16-400	16-240	V1300	Punch, Hexagonal, Oval	3,46	263	88	75

Crimp geometries



EXPRESS



DV1300C2



Crimp head with patented DUAL technology for crimping Cu-terminals, type KR/KRF and KS/KSF 10-300 mm². Used in combination with foot pump P4000 or the electrically powered pump PS710 (battery powered version of PS710E is also available).

Properties:

- crimp head for the patented DUAL technology that provides optimised hexagonal crimping + a indent crimping in two integrated steps
- working pressure 63 MPa (630 bar)
- crimp force 130 kN
- no die holders are needed for DUAL dies
- other accessories (without DUAL function) for crimping Cu can be used
- DUAL: 10 - 300 mm²

mm ² (Cu)	Name	Crimp geometries	Net weight (kg)	Length mm	Width	Height
10-400	DV1300C2	Dual, Hexagonal, Oval	4,9	297	140	75

Crimp geometries



DV250



Tested and certified crimp head with patented DUAL technology for crimping Cu-terminals, type KRF/KSF 120-400 mm². Used in combination with foot pump P4000 or the electrically powered pump PS710 (battery powered version of PS710E is also available).

Properties:

- crimp head with the patented DUAL technology that provides optimised hexagonal crimping + a certain amount of indent crimping in two integrated steps
- working pressure 63 MPa (630 bar)
- crimp force 250kN (25 tonnes)
- large crimp area
- no die holders are needed for DUAL dies
- Other accessories (without DUAL function) for crimping both Cu and Al-terminals can be used
- DUAL: 120 - 400 mm²

mm ² (Cu)	mm ² (Stranded Al)	mm ² (Solid Al)	Name	Crimp geometries	Net weight (kg)	Length mm	Width	Height
10-800	16-630	16-300	DV250	Punch, Dual, Hexagonal, Oval	4,8	280	111	74

Crimp geometries



Table stand for Cu- and Al-terminals



TS1300, TS1300CU, TS1300AL

The TS1300 is a table stand that can be used with crimp heads DV1300C2 or V1300C2-AL.

The table stand is designed for operators with high frequency use of the C2 crimp head. With the table stand you get a stable, safe and easy use of the C2 crimp head.



mm ²	Name	Crimp geometries	Net weight (kg)	Length mm	Width	Height
10-400	TS1300CU	Dual, Hexagonal, Oval	18,7	190	100	312
16-400	TS1300AL	Punch	20,9	190	100	330
10-400	TS1300		14,1	190	100	215

TS1300 with crimp head



ELPRESS

Accessories for crimping Cu flexible conductors with DUAL system DV1300, DV1300C2, PVX1300, PVX1300C2 and DV250

Crimp dies for DV1300 och PVX1300


Supplied in pairs.

For Cu-terminals, type KR/KRF and KS/KSF and flexible Cu conductors.


No die holders are needed.



Die pair 13DB20.



Crimp sequence for one crimp.



Crimp sequence for two crimps.

mm ²	Name	Number of crimps	Net weight (kg)
10	13DB8	1	0,448
16	13DB9	1	0,447
25	13DB11	1	0,462
35	13DB13	1	0,477
50	13DB14,5	1	0,480
70	13DB17	1	0,486
95	13DB20	1	0,484
120	13DB22	2	0,441
150	13DB25	2	0,440
185	13DB27	2	0,443
240	13DB30	2	0,453
300	13DB32	2	0,428

Crimp dies for DV1300C2 and PVX1300C2


Supplied in pairs.

For Cu-terminals, type KR/KRF and KS/KSF and flexible Cu conductors.


No die holders are needed.



Die pair 13DCB20.



Crimp sequence for one crimp.




Crimp sequence for two crimps.

mm ²	Name	Number of crimps	Net weight (kg)
10	13DCB8	1	0,456
16	13DCB9	1	0,440
25	13DCB11	1	0,465
35	13DCB13	1	0,486
50	13DCB14,5	1	0,497
70	13DCB17	1	0,503
95	13DCB20	1	0,507
120	13DCB22	2	0,450
150	13DCB25	2	0,498
185	13DCB27	2	0,514
240	13DCB30	2	0,534
300	13DCB32	2	0,490


Crimp dies for DV250

Supplied in pairs.

For Cu-terminals, type KR/KRF and KS/KSF and flexible Cu conductors.
No die holders are needed.

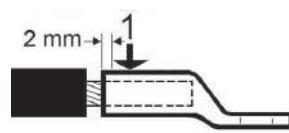

Crimp sequence for one crimp.

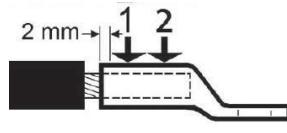

Crimp sequence for two crimps.

mm ²	Name	Number of crimps	Net weight (kg)
120	DB2522	1	1,060
150	DB2525	1	1,060
185	DB2527	1	1,060
240	DB2530	1	1,060
300	DB2532	1	1,060
400	DB2538	2	1,060

Earthing and braids

Flat, flexible braids

Earthing braids with flat, twined, highly flexible Cu-conductor, uncoated 0,09 - 400 mm².

- Broad range of flexible and highly flexible flat earth braids.
- Customer unique solutions are available.
- Braids in other materials, such as stainless steel, aluminium or insulated connectors could also be provided.

Uncoated earthing braid: FJCU area (mm²) - length (mm) - Hole size

Example: FJCU50-100-8



Flat, flexible braids (tin plated)

Earthing braids with flat, twined, highly flexible Cu-conductor, tin plated 0,09 - 400 mm².

- Broad range of flexible and highly flexible flat earth braids.
- Customer unique solutions can be made.
- Braids in other material, such as stainless steel, aluminium or insulated connectors are also available.

Tin plated earthing braid: FJCUSN area (mm²) - length (mm) - Hole size

Example: FJCUSN50-100-8



Round, flexible connections (un-insulated)

Un-insulated slacks with many possibilities to connect Elpress terminals.

Such as KSF/KRF Cu tube terminal range, AlCu bi-metallic range

AKK/AKS or Al range AK/AS.

Round, twined, highly flexible Cu-conductor, tin plated or uncoated, 0,06 - 600 mm².

- Broad range of flexible and highly flexible flat earth braids.
- Customer unique solutions available.
- Braids in other materials, such as stainless steel, aluminium or insulated connectors are also available.

Uncoated earthing braid (round): FLCU area (mm²) - length (mm) - Hole size

Example: FLCU50-100-8



Round, flexible connections (un-insulated, tin plated)

Un-insulated slacks with many possibilities to connect Elpress terminals.
 Such as KSF/KRF Cu tube terminal range, AlCu bi-metallic range AKK/AKS
 or Al range AK/AS.

Round, twined, highly flexible Cu-conductor, tin plated or uncoated, 0,06 - 600 mm².



- Broad range of flexible and highly flexible flat earth braids.
- Customer unique solutions could be made.
- Braids in other materials, such as stainless steel, aluminium or insulated connectors could also be provided.

Tin plated earthing braid (round): FLCUSN area (mm²) - length (mm) - Hole size

Example: FLCUSN50-100-8



Round, flexible connections (insulated)

Insulated slacks with many possibilities to connect Elpress terminals.
 Such as KSF/KRF Cu tube terminal range, AlCu bi-metallic range AKK/AKS
 or Al range AK/AS.

Round, twined, highly flexible Cu-conductor, tin plated or uncoated, 0,06 - 600 mm².



Insulated, uncoated slacks: FKCU area (mm²) - length (mm) - Hole size

Example: FKCU50-100-8



Slacks

Type	Conductor mm ²	Hole	Description	Used with (combine terminals freely)
KRF	CU 16-800	M range	Terminal	CU conductors
KSF	CU 16-800		Connector	CU conductors
AKS	AL/CU 10-400/10-300		Connector	CU and/or AL conductors
AKK	AL 16-1200	M range	Terminal	AL conductors
AKP	AL 16-1200		Pin terminal	AL conductors
KR	CU 0,75-10	M range	Terminal	CU conductors
KS	CU 0,75-10		Connector	CU conductors

Lightweight and versatile designed pumps based on customer needs



PS710

The PS710 is an electrically driven pump for crimping with advanced control and monitoring of crimping progress. A flexible system for a wide range of applications with high performance and reliability for professional use. The pump is suitable for cabling manufacturers as well as for fitters working in the field. The PS710 can be used for all types of crimping or cutting.

The PS710 has a power source for all types of crimping.

Technical data:

- possibility to use different pressure ranges, 0 - 700 Bar
- can be used with a PC on a computer network with a printer, does not apply to the PS710R
- oil flow at 20 bar: 0.6 litre/min (PS710D 1.2 litre/min)
- oil volume: 1.0 litre
- oil type: HYDREX MV 22 or similar
- crimps/battery charge: 120 crimps with Cu 150 mm²
- ambient temperature: -22 to 55°C
- protection: IP54
- mains operation 85-276VAC 50-60Hz
- Li-ion battery 28,8V, 3,0 Ah
- meet CE requirements: Safety of machinery 2006/42/EC, Electromagnetic compatibility 2014/30/EU, Low Voltage Directive 2014/35/EU, ROHS 2014/35/EU, WEEE 2012/19/EU
- weight approx. 12,4 kg
- compact dimensions 370 x 170 x 280 mm

The pump consists of three basic versions, each with customisation options.



PS710D

- For cabling manufacturers, used with crimping station CS2500

Properties:

- unique electronic control system together with special PC software
- analysis and process monitoring/control, SPC, for tracking each crimp
- LCD Display with keypad for full status information of pump to the fitter
- communication with PC in real time provides instant quality control
- integrated communication via CAN with Elpress CS2500
- high flow hydraulic pump for fastest possible crimping
- can be used with PC on a computer network with printer

Name	Net weight (kg)	Length mm	Width	Height
PS710D	12,4	370	170	280



Pump PS710D



PS710E



Pump PS710E

For fitters working in the distribution network or industry.

Properties:

- small and light weight, which makes the product easy to use in every situation
- maximum performance, can be used both with Li-ion battery 28.8 V or 220V mains power
- LCD Display with keypad for full status information of pump to the fitter
- able to store and document crimps in the control system
- PC communication via USB
- to be used with crimp heads and cable cutters
- Elpress ergonomic handle ERGOCOM, with wireless communication can be selected for
- charger 230 VAC 50 Hz, 10.8-28.8 V, charging time 65 min

Name	Net weight (kg)	Length mm	Width	Height
PS710E	12	370	170	280



PS710E251 and PS710E501*



Contains:

- pump E-version
- cable
- hydraulic hose 2.4 m or 5.0 m with wireless communication ERGOCOM
- battery
- charger
- carrying strap
- 110-240VAC 50-60Hz

Name	Gross weight (kg)	Length mm	Width	Height	Note
PS710E251	24,5	370	170	280	PS710E pump with carrying strap. Ergocom hose 2.4 m and power cord EU, battery and charger
PS710E501	26,0	370	170	280	PS710E pump with carrying strap. Ergocom hose 5.0 m and power cord EU, battery and charger
PS710E501-US	26,0	370	170	280	PS710E pump with carrying strap. Ergo hose 5.0 m and power cord US, battery and charger
PS710E251-US	24,5	370	170	280	PS710E pump with carrying strap. Ergo hose 2.4 m and power cord US, battery and charger

ERGOCOM hoses are not available in US/North American market.



ELPRESS

Accessories for PS710x



Name	Pcs/ pack	Note
HYD.SLANG KPL. 2,4M ERG PS710E	1	Hydraulic hose (2.4 m) for PS710E, with ERGO handle
HYD.SLANG KPL. 5M ERGO PS710E	1	Hydraulic hose (5 m) for PS710E, with ERGO handle
HYD.SLANG KPL.2,4M ERGO PS710R	1	Hydraulic hose (2.4 m) for PS710R, with ERGO handle
HYD.SLANG KPL. 5M ERGO PS710R	1	Hydraulic hose (5 m) for PS710R, with ERGO handle
HYD.SLANG KPL. 2,4M ERGOCOM	1	Hydraulic hose (2.4 m) for PS710R, with ERGOCOM handle (bluetooth)
HYD.SLANG KPL. 5M ERGOCOM	1	Hydraulic hose (5 m) for PS710R, with ERGOCOM handle (bluetooth)
FCU-PS710R	1	Foot pedal for PS710R
FCU-PS710D&E	1	Foot pedal for PS710D and PS710E
BÄRREM PS710	1	Carrying strap for all PS710 versions

ERGOCOM hoses are not available in US/North American market

Other hydraulic pumps



P1000

Secure, lean produced 2-step pump as an economical alternative for industrial use where simplicity and reliability is required.

Properties:

- hydraulic pressure: Working range 0-63 (70) MPa, adjustable
- hydraulic flow: Low pressure (up to 1.5 MPa) approx. 0.8 l/min, High pressure (more than 1.5 MPa) 0.2 l/min
- oil volume 2 l (usable 1.8 l)
- oil hydraulic oil ISOVG32
- mains connection 230 V AC 50/60 Hz
- allowable voltage fluctuation: Rated voltage ±5%
- electric motor 0.25 kW, Class E insulation, open type commutated motor 230 V, 50/60 Hz single-phase, Max. current: 2.8 A (5 min.)
- protection class IP20
- environment temperatures 0 - 40°C
- CE-approved: Machine safety 98/37/CE, LVD 73/23/EEC
- hydraulic house 2.4 m, quick coupling, manoeuvre handle 12 V AC
- mains cord 1.5 m earth plug

Name	Net weight (kg)	Length mm	Width	Height
P1000	14	250	384	150



P4000

Properties:

- unique version in high strength aluminium alloy
- ergonomic design
- smooth, anodised (electro-oxidised) surfaces – easy to keep clean
- highly efficient, two-stage pump system with fast feed
- single foot-operated pressure relief (tool return) after automatic stop when crimping is complete
- 2.2 m hose with quick coupling
- standard pressure setting 630 bar/63 MPa, (max. setting 700 bar)
- safety valve for return at all pressures
- smooth transport mode for the hose
- special output for pressure monitoring

Name	Net weight (kg)	Length mm	Width	Height
P4000	8,8	500	180	280


EXPRESS

Crimp station for industrial crimping of KRF/KSF terminals 10 - 300 mm²


CE
CS2500


Crimp station CS2500.

Elpress crimp station CS2500 offers efficient production with the greatest possible personal safety. Advanced, intelligent properties combined with simplicity make the product unique.

Properties:

- designed for continuous production of electric Cu-terminals, 10-300 mm²
- quick locking of the terminal using low force shortens the overall time for crimping
- automatic setting of crimp force up to 250 kN, provides optimal service life for tools and accessories
- only one crimp necessary throughout the work area
- integrated Elpress DUAL System
- hydraulic pump PS710D with control, monitoring and error reporting
- operated with a foot pedal
- CE approved, meets the requirements of the Safety of machinery directive
- software Analyzer for analysis and report printout of crimps
- 110-240VAC 50-60Hz

mm ² (Cu)	Name	Net weight (kg)	Length mm	Width	Height
10-300	CS2500	59,5	200	350	340



Pump PS710D.

Crimp dies for CS2500

Supplied in pairs.


For Cu-terminals, type KR/KRF and KS/KSF and flexible Cu conductors, no die holders are required.



Die pair 13DCB20.

mm ²	Name	Number of crimps	Net weight (kg)
10	13DCB8	1	0,456
16	13DCB9	1	0,440
25	13DCB11	1	0,465
35	13DCB13	1	0,486
50	13DCB14,5	1	0,497
70	13DCB17	1	0,503
95	13DCB20	1	0,507
120	20DCB22	1	0,599
150	20DCB25	1	0,599
185	20DCB27	1	0,591
240	20DCB30	1	0,587
300	20DCB32	1	0,564

Analyzer - software for analysis of crimps and system calibration

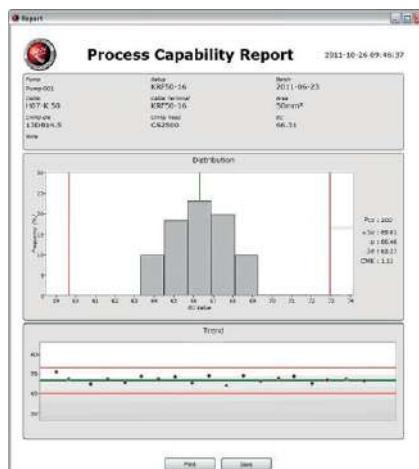

Analyzer, measures and analyses each individual crimp.

The Analyzer program is used to ensure quality crimps and save data to quality documents. By simple means, all crimps can be studied in a PC environment where they get their own ID number for full traceability. The unique SPC tool, Statistic Process Control, makes it possible to consider crimping as a measurable process. Analyzer is a statistical program for systematic studies of variations in the crimp process. Furthermore, you can export, import, print or save graphs, calibration data, batch reports etc.

Properties:

- Elpress Analyzer improves overall quality
- helps the user
- provides a process improvement tool
- measures and shows all crimps
- supports preventive maintenance of equipment
- creates traceability and documentation
- makes communication easy
- increases user skills
- eliminates incorrect crimps
- comes with instructions for use

Some important comments on contact crimping



About System Elpress

There is a wide range of electrical terminals today, and it can be difficult to know if you have chosen the right solution for your installation.

A first step is to ensure that a system is chosen, consisting of terminal, tools and a standard conductor.

In order for this combination of material to be classified as a system, there must be common test documentation, a type test according to a standard relevant to the material.

There may also be a need to identify the correct terminal depending on the cable class. Cables are divided into different classes depending on their structure.

With System Elpress you get a complete solution, KRF/KSF in combination with Dual can be combined with all Cu cable classes. Elpress systems for aluminium indented crimping are a robust solution that can be used with all types of Al cables.

Not choosing a system carries great risks. All terminals are designed with respect to a specific tool system. Small differences in dimensions of terminals and tools can lead to serious consequences, such as hot running or fire.

Terminals

Elpress terminals have been developed over 60 years of continuous work to always meet the highest standards.

Our terminals are designed to be able to operate at a continuous temperature of 90°C and to always be able to carry the same load that the relevant cable area can handle.

This means, among other things, that tubes for our KRF/KSF are dimensioned to be adapted to the cable's conductivity. This type of terminal should be crimped with a hexagonal geometry that provides a symmetrical shape that distributes crimp force evenly and ensures that thin strands are not damaged shortening the lifetime of the connection.

Our aluminium terminals are designed according to the same criteria and requirements as mentioned above, and should be crimped with a punch tool that ensures that the aluminium insulating oxide layer is broken and that good points of contact are created between conductors and terminal.

Cables

Elpress terminal systems are designed to be used in conjunction with cables according to IEC 60228. This is an international standard used all over the world and describes the structure and conductivity of a cable (Ω/km). The norm divides cables into classes as shown below.



Class 1
Solid conductor



Class 5
Flexible conductor



Class 2
Stranded conductor



Class 6
High flexible conductor

Types of conductor

Cables in each class shall have mechanical and electrical properties that meet the requirements of the norm, which means that they can be used with System Elpress without special adaptation. In addition to the classification of conductors, the differences between cables are mainly in the design of the insulation.



Hexagonal crimping.



Indented crimping.



Trained users

Another important aspect of a system is a knowledgeable and trained operator. Good and safe work requires knowledge of materials, regulations and the importance of using a system solution. We offer company-adapted training that includes both theoretical and practical parts.

Standards for contact crimping



Standards for electrical terminals

SEK Svensk Elstandard is appointed by the government to be responsible for all standardisation within the electrical area in Sweden.

The Standards are established mainly through international and European collaborations within the International Electrotechnical Commission (IEC) and CENELEC (Comité Européen de Normalisation Electrotechnique). SEK represents and coordinates Swedish companies and authorities.

These standards are available on the SEK website. There are also manuals that show regulations and recommendations for different types of installations.

For type testing of electrical terminals, the current standard is IEC 61238-1-1, it supersedes all national standards.

It has been active since 1993 and was last updated in 2018 and is thus the standard that best meets the requirements that can be imposed on today's installations.

In addition to this, there are a large number of more industry-specific standards for railways or switchgear where, in addition to the requirements of IEC 61238-1-1, there may be a need for vibration and environmental testing.



SEK - Svensk elstandard, <https://elstandard.se/>



IEC, <https://www.iec.ch/>



CENELEC, <https://www.cenelec.eu/>

Tests against standard

Many existing products for electrical terminals are older than IEC 61238-1-1, this does not mean that they have to be retested against the new standard to be acceptable, the standard they were tested against at launch applies. This is rarely a problem as they are likely to be used in installations of the same age. In newer installations with higher demands on current and temperature, it is important to choose materials tested according to current standards.

Crimp results

For a good crimp result, you have to ensure clean conductor surfaces, without visible oxide layers.

A good cable stripper guarantees clean stripping without damage to individual strands, follow Elpress instructions for stripping lengths.

Crimping tools should be checked before starting work, to avoid the risk of injury and to ensure a good result.

The crimp dies are the key to a successful crimping process, whether they are hydraulically or manually operated.

It is very important that all tool parts are kept dry and clean and that they are regularly checked for damage.

Damage and/or contamination of tool parts can lead to a deterioration in the end result and shortened tool life.



Use and safety instructions

Instructions and directions

Elpress hydraulic and mechanical tool systems are some of the safest on the market. Safety requires that instructions and directions are available and followed closely. Each Elpress tool is therefore accompanied by detailed instructions on how to use the tool. These instructions should be read carefully before use, in the best interests of the operator.

Correct use of the tools:

- increases productivity
- increases tool life
- ensures the quality of work done
- minimises the risk of accidents

Safety rules

Below are some simple and common rules that we at Elpress recommend all operators to follow:

- Before starting work with a crimp tool, a thorough visual inspection should be carried out. Pump, crimp head, forks, couplings, hoses and other accessories must be checked to ensure that they are faultless and clean. The correct placement of the inserts in the forks should also be checked before starting work.
- All operators must wear personal protective equipment such as A51 gloves, goggles and safety shoes.
- Hydraulic pressure must not be applied to a hose that is heavily bent or knotted. The hose is made for particularly high pressure and cannot be replaced by another type.
- Hydraulic tools must never be carried in the hose or coupling.
- Operate with caution, do not drop heavy objects on the hydraulic hose. This can damage the steel reinforcement and cause leakage. If leakage occurs, oil under high pressure may come into contact and penetrate the skin resulting in internal injury. If this happens, contact a doctor immediately.
- The tools must be serviced and calibrated at regular intervals.
- Make sure that the correct tool or tool insert has been selected for the terminal and conductor to be crimped.
- Check that the installation is unpowered before carrying out work. The tools are not designed for "Live working".
- Keep in mind that there is very high crimp pressure during work. Therefore, never stand in front of a tool in the direction of crimping force.
- Pay attention to the risk of crushing and cutting injuries during work. This applies to all types of crimping tools and cable cutters.
- If there is a suspicion of failure of a crimp system, always contact the Elpress Service Centre.


Check of crimping results

In order to ensure that the tool has achieved the predetermined shape change for each cable terminal, the crimp result shall be measured. This shape change provides both mechanical strength and good electrical properties.

Hexagonal crimping

For terminals and through connectors of copper the following applies:

- The "N" dimension is checked in the direction of the crimp.
- Measure with calipers and compare with the table's "N" dimensions.
- If the measurement result exceeds the "N" dimension (according to the table that follows) after correct contact crimping, contact the Elpress service centre.

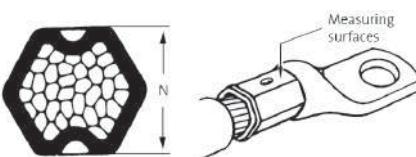

Crimp die table type KRF/KSF with Dual dies (N measurement)

Type KRF/KSF with DUAL dies

KRF/KSF	DB-die nr	max N mm
10	8	6,7
16	9	7,5
25	11	9,0
35	13	10,6
50	14,5	11,8
70	17	13,6
95	20	16,0
120	22	17,7
150	25	20,3
185	27	21,7
240	30	23,9
300	32	25,7
400	38	30,5


Crimp die table type KRF/KSF (N-measurement)

Type KRF/KSF with B-dies

KRF/KSF	Die No.	max N mm
10	8	6,3
16	9	7,3
25	11	8,8
35	13	10,2
50	14,5	11,2
70	17	13,4
95	20	16,4
95	20	15,8 (TB die)
120	22	16,3
150	25	20,1
150	25	20,3 (CB and KB dies)
185	27	20,5
240	30	23,3
300	32	24,5
400	38	30,3
500	42	30,4
630	53	38,4
800	53	38,4

Oval crimping

For Cu branching sleeves, the "h" dimension must be checked. This is done at the maximum height of the crimped oval, preferably with calipers. The measurements are compared to the table below. If the "h" measurement is exceeded, after a contact crimping, contact the nearest Elpress service centre. See measurement points on the image below.

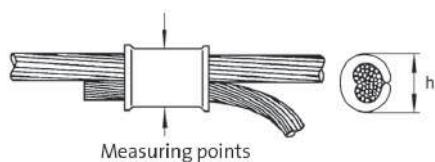


Crimp die table type C sleeves (H-dimensions)

C-die No.	Sleeve	max h mm
5	C6-10	12.5
6	C16-25	15.5
8-9	C25-50	22.0
13	C50-70, C70-95	26.5
15	C95-120	30.8
18	C150-185	44.5
21	C240-300, C23	54.4

Indent crimping

For Al terminals, the measurement "T" must be checked, which is measured at the bottom of the indent that the punch has achieved on the terminal. This is best done with special calipers, contact Elpress if necessary. Compare measured "T" measurement with table. If the "T" measurement is exceeded, after indented crimping, contact the nearest Elpress service centre. See measurement points on the image below.

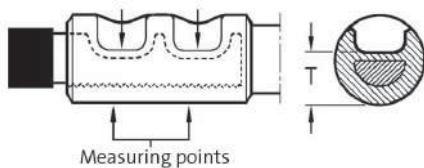

Crimp die table type AK/AS (T-measurement)

Type AS/AK/AKK	Matrix	Punch	Tools
16	P13M/TP13M	P13D/TP13D	6.8
25	P13M	P13D	6.8
35	P20M	P20D	10.8
50	P20M	P20D	10.8
70	P20M	P20D	10.8
95	P25M	P25D	13.5
120	P25M	P25D	13.5
150	P25M	P25D	13.5
150SOLID	13P29M	13P29D	14.3
185	P32M	P32D	18.4
240	P32M	P32D	18.4
300	P36M	P36/40/44D	21.0
300B	13P37M/P2537M	13P37D/P2537D	22.5
400B	13P37M/P2537M	13P37D/P2537D	22.5
400	P40M	P36/40/44D	22.8
500B	P44M	P36/40/44D	24.5
500A	P2552M	P2552D	31.0
630A	P2552M	P2552D	31.0
630	W60M	W60D	36.0
800	W60M	W60D	36.0
1000	W60M	W60D	36.0
1200	W70M	W70D	41.0

Bolt joints


Bolt joints

Users/installers of bolted connectors always have to adhere to, and follow electrical codes and norms in the local region where they are making such installations. The information below is general and hence, should never be seen as an installation instruction.

The installation of a terminal with bolt joint for electrical transmission requires special attention. It is important that this is done in

a correct manner, as important as the contact crimping at the other end of the terminal as described above. The joint must achieve a sufficiently high clamping force, distributed in a desirable manner and ensure the electrical properties over a very long time under high and varying loads of different characteristics. It is very important to follow the installation instructions.

These are based on theoretical calculations, verified tests and experience from field studies. Tightening must be carried out in a controlled manner using torque tools, where the relevant screw is tensioned to the specified torque. The accuracy of the tool is of great importance. The clamping force of a properly tightened screw shall create a contact area large enough to ensure good conductivity, without the risk of overheating. In order for the clamping force to be distributed evenly and create a sufficiently large contact area, **hard flat washers must always be used**, type BRB HB200 SMS 70, under screw head and nut. See image below. This applies regardless of the hardness of the conductive materials (which are softer than HB200). Otherwise, there is risk of large deformation of the conducting material that reduces the tension, which can increase the risk of inadequate contact area and overheating.

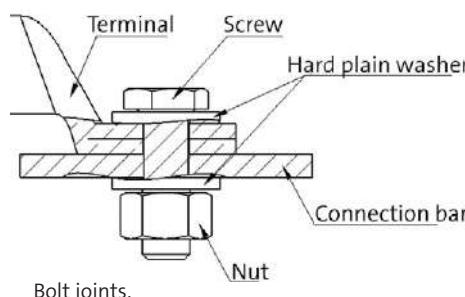

Tension washers

The use of different types of locking elements or spring washers often increases the risk of settlement. If a spring washer of type DIN 6796, with a very high clamping force, is positioned and secured between e.g. nut and the hard flat washer, it can provide an increased margin towards excessively high settlement.

The diameter of the tension washer should be less than or equal to the flat washer's, even after tightening fully. Otherwise, the risk of settlement at the outer edge of the flat washer increases where the clamping forces are concentrated.

When using spring washers, 1 is sufficient and it is preferably placed on the opposite side of the terminal.



Bolt joint with spring washer.

Mounting the terminal against the connection rail

Max. 2 terminals of the same size on the same screw. Current load should be checked.

Preparatory:

- Clean contact surfaces from dirt, oxide layers and grease using a steel brush and denatured alcohol. This is especially important for aluminium. Surfaces that are tinned, nickel-plated, silver plated must not be brushed.
- Petroleum jelly or contact grease reduces corrosion risk on cleaned surfaces

Fastener selection:

- Screws and nuts of strength class 8.8.
- Greased galvanized screws provide the least dispersion of the pre-tension force.
- Choose stainless A4-80 in environments when there is a high risk of corrosion.

Selection of washers:

- Always select hard flat washers of the BRB, HB200 type.
- The tension washer can normally be excluded. If a tension washer of type DIN 6796 is used, it must be placed between the screw head/nut and the flat washer. It must never be placed directly against an electrical contact surface without a flat washer in between. The flat washer must have an external diameter at least as large as the tension washer.
- 1 spring washer is sufficient and it should be placed on the rear of the busbar, between nut and hard flat washer, see diagram.

Installation:

- The screws must be tightened with torque tools so that tightening is controlled.
- Torque wrenches must be calibrated regularly. Oil the screw when installing. Even if the torque is recorded correctly, the pre-tension force depends entirely on the friction.
- Tightening torque according to the table above. Accuracy better than $\pm 5\%$.
- The terminal palm and busbar may be of different materials.

Al/Al gives a weaker joint. It is important to clean and use contact grease. Tension washer + flat washer can reduce the risk of settlement.

Al/Cu gives a higher risk of corrosion and settlement, use contact grease.

Cu/Al provides low risk of galvanic corrosion when the rail is made of Al.

Cu/CU provides the best joint, good contact and small risk of settlement.

Recommended tightening torque

Thread	Steel 8.8 *	Steel 8.8 *	Steel 8.8 *	Steel 10.9 *	Steel 10.9 *	Steel 10.9 *	Stainless *	Stainless *	Stainless *
-	Mv	Ff	p	Mv	Ff	p	Mv	Ff	P
M5	5,5	6,6	118,0	8,0	9,2	164,0	5,5	6,2	111,0
M6	9,5	9,2	114,0	13,0	13,0	160,0	9,5	8,6	107,0
M8	23,0	17,0	116,0	32,0	24,0	164,0	22,0	16,0	109,0
M10	45,0	27,0	92,0	64,0	38,0	129,0	45,0	25,5	88,0
M12	78,0	40,0	125,0	110,0	56,0	175,0	76,0	37,0	116,0
M16	200,0	75,0	156,0	280,0	110,0	229,0	185,0	69,0	144,0

Mv = tightening torque (Nm)

Ff = pre-tensioning force (kN)

p = flat pressure (N/mm^2)

FZB = electroplated + gloss chromed

FZY = electroplated + hard chromed

FZM = FZM= mechanically galvanized

* (FZB, FZY, FZM)

A4/80



Service and maintenance

Service and maintenance

Our service department maintains, repairs, checks, calibrates and certifies Elpress tools and power sources. Following a review of the equipment by the service department, certificates are issued that verify the performance of the tools. To ensure that your crimped terminals maintain a high and even level of quality, regular checks shall be done of the crimping tools.

We offer:

- Contract preventive maintenance, Elpress Basic and Elpress Advance
- Calibration of tools
- Repairs (servicing of tools)
- Rental of crimping equipment

KONTROLLBEVIS / INSPECTION CERTIFICATE					
Kontrollbevis / Inspection date	2019-03-08				
Kontrollbevis / Inspection No.	15157				
Kund / Customer					
Tel / Phone No.					
Fax / Fax No.					
Kund nr / Customer					
Vare nr / Model	Servis / Serial No.	Amtst. Länsstyrelse	Kontrollbevis / Elpress Basic		
Beskrivning / Description					
Metod / Method	Gatvärlden med kontinuerlig inspektion (Elpress Basic) / Continuous inspection of the world of crimping tools (Elpress Basic)				
Avsättning / Removal	Björn - Universell teknik och service				
MATERIAL / MATERIAL					
HYDRAULPUMPAR / HYDRAULIC PUMPS					
Max tryck tillstånd / Max pressure during inspection	bar				
Max tryck vid inspektion / Max pressure during inspection	bar				
Max tryck vid inspektion vid konsert / Max pressure after adjustment inspection	bar				
Översikt över delar i servisinspektionen av					
<input type="checkbox"/> Trådfilter / Internal filter	<input type="checkbox"/> Trådlektage / Internal leakage				
<input type="checkbox"/> Stängt och återstängt / Closed and re-opened	<input type="checkbox"/> Stängt och återstängt / Closed and re-opened				
<input type="checkbox"/> Minimera fukt och återstängt / Damp and re-opened	<input type="checkbox"/> Minimera fukt och återstängt / Damp and re-opened				
Betyg / Grade					
<input checked="" type="checkbox"/> GODKÄNT / APPROVED	<input type="checkbox"/> OAKTAD / NOT APPROVED				
Meddelande om att underskrift är registrerad i elektroniskt system					
Kontrollat av / Inspected by	Lars-Göran Forsman 319140-15				
Hänvisning till företag / Reference to company					
Ett av företagets medarbetare har underskriftat detta dokument. ELPRESS AB, Industriavagen 13, 171 83 Ale, Sverige Tel: +46 31 77 11 00, Telefax: +46 31 77 11 15 E-mail: info@elpress.se - Webbplats: www.elpress.se	Skriven / Signed				
ELPRESS MEDLEM I URSKOGSHYDRAULIK				Datum / Date	

Preventive maintenance

Elpress service offers a flexible service solution for increased security with fast service and high availability.

Our service agreements are available in 2 levels, Elpress Basic and Elpress Advance. To sign a service agreement with Elpress means the following:

- Planned and preventive maintenance ensures better performance for your equipment.
- Regular service intervals minimise the risk of unforeseen stoppages by indicating any safety or functional defects and recommending measures to avoid these problems
- Regular service intervals are normally implemented every 12 months for a fixed price
- The price is based on the service level and tool equipment.
- A certificate is issued after the equipment has complied with calibration requirements
- Calibration can also be done on-site at the customer



Elpress Basic

This forms the basis of a service agreement and includes the following points:

- General inspection of the tool
- Safety aspects according to declaration of conformity (compliance with the Machinery Safety Directive, Low Voltage Directive, EMC Directive).
- Function test
- Checking of accessories, e.g. crimp dies etc.
- Issue of Certificate
- The inspection follows Elpress final inspection and acceptance inspection requirements.

Elpress Advance

Elpress Advance includes:

- Elpress Basic + corrective maintenance
- Includes calibration with certification and consumables repairs at a fixed price.



Calibration with certification of tool

Calibration follows the same points and requirements as Elpress Basic, but it is the customer's responsibility to submit the tool for calibration.

Rental of contact crimping equipment

Sometimes the accumulation of work can be greater than can be expected, or individual projects may require more resources than usual and then it is possible to rent equipment at Elpress. When repairing equipment for a company, Elpress can rent tools to the company if required, until the original equipment is repaired and returned.

Purchased a new product?

Send the Product registration form to Elpress and Elpress Basic is included for free the first year.



Information

More information is available from the service department:
<https://www.elpress.net/en/products/system-elpress/service/>

Technical information

Connecting materials

Elpress uses copper, brass and aluminium as terminal materials.

The copper and brass products are electrolytically tin plated for increased corrosion resistance. In a bimetal (copper aluminium) terminal, the copper part is untreated.

Brass

Brass is mainly used for flat pin sleeves in areas up to 6 mm², where good suspension properties are desired.

Brass is an alloy of about 70% copper and about 30% zinc and has very good cold form properties.

Copper

The copper used by Elpress for terminals has a purity of at least 99.95 %. Its excellent properties for use in electrical terminals are among the following:

- high conductivity (only silver is better)
- high corrosion resistance
- good formability
- good sealability

In manufacturing the neck of the terminal element is soft soldered in order to obtain as good form properties and good enclosure around the conductor as possible during the contact crimping. This then provides a terminal that exhibits low transitional resistance and good mechanical properties.

Aluminium

The aluminium used for through connectors and cable terminals has a purity of at least 99.7 % and its excellent qualities are:

- low weight
- strong, in relation to its weight
- good electrical conductivity, approximately 60% of the conductivity of copper
- easy to work with

Conductor design

Cable standard IEC 60228 provides:

Information about materials, construction and resistance values for both copper and aluminium conductors.

- Class 1 solid conductor
- Class 2 stranded conductor
- Class 5 flexible conductor
- Class 6 highly flexible conductor

UL-approved terminals

KR/KS, KRF/KSF, KRFS, KRT/KST UL approved in accordance with file no. E205350. UL certified products are delivered with UL marking on the label including the UL file number and/or certification code for control by an UL inspector. The certificate can be downloaded at UL Product IQ.

MCM and AWG cross-reference table to the corresponding area in mm²

MCM No.	Area mm ²	AWG No.	Area mm ²
250	127	36	0,013
300	152	34	0,020
350	177	32	0,032
400	203	30	0,051
450	228	28	0,080
500	253	26	0,13
550	279	24	0,20
600	304	22	0,33
650	329	20	0,56
700	355	19	0,65
750	380	18	0,82
800	405	17	1,04
850	431	16	1,31
900	456	15	1,65
1000	507	14	2,08
1100	557	13	2,62
1200	608	12	3,31
1300	659	11	4,17
1400	709	10	5,26
1500	760	9	6,63
1600	811	8	8,37
1700	861	7	10,6
1800	912	6	13,3
1900	963	5	16,8
2000	1013	4	21,2
		3	26,4
		2	33,6
		1	42,4
		1/0	53,5
		2/0	67,4
		3/0	85,5
		4/0	107

Remarks:

1. The information in this table comes from catalogues published by respected cable providers and does not refer to official standards.
2. The types relating to AWG vary depending on the different design of the conductors, i.e. the number of strands.
AWG > 20 refers to single strand conductors.
AWG ≤ 20 refers to multi stranded conductors.
Exact areas for specific number of strands can be found in cable provider catalogues.

Development - technical services

Development - technical services

Elpress is one of Europe's leading manufacturers of electrical crimping systems and has 60 years of experience in application solutions in everything from nuclear power plants to small electronic devices.

Products in electrical applications are subjected to both mechanical and thermal loads.

Elpress invests considerable resources to achieve success through continuous product development towards better value, quality and performance.


For this purpose there is modern laboratory equipment for, among other things:

- High current testing
- Mechanical tensile strength testing
- Cyclic current testing
- Vibration testing
- Corrosion testing
- Resistance determination

The activities also include theoretical studies, prototype development, technical documentation and advice etc. The competence of the staff together with good laboratory and calculation aids is a strong competitive tool both in terms of consultancy services and their own development projects.



Test of terminals.

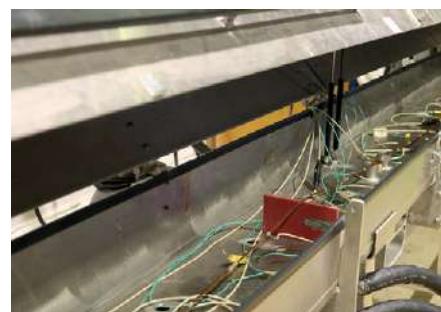

Tests according to IEC 61238-1-1 in own premises.



Laboratory report.



Flexible and customized test setups.

General comments on the use of Elpress terminals for voltages of 12 kV and above


Terminals

The modern and easy-to-use cable terminations for 12 to 36 kV PEX insulated cable consisting of prefabricated modules or even fully finished terminations, provide no or very little restriction in the use of terminals with type designations AK, AKK or KRF. This also includes the "top pins" with the type designation AKP.

One detail to take into account when using KRF terminals outdoors is that this terminal is equipped with an inspection hole that must be sealed. Your supplier of cable terminations can provide its specific solution.

Terminals type AK, AKK or "top pin" AKP can today be used on high voltage cable terminations where solutions are available up to 84 kV. In case of doubt, always consult with your cable termination supplier for specific solutions for different issues regarding technical details regarding the design.

When installing cable terminations for oil impregnated paper cable where an oil reservoir is used, manufacturers usually have their own specially designed solutions for the conductor connections.



Joint sleeves PEX insulated cable against PEX insulated cable

In Sweden, four types of splice are currently used in the voltage range 12 to 36 kV. These are tape, heat shrink, cold shrink and push-on joints. All these joints are designed to accept AS, AKS and KSF through connectors. No connectors with conical ends are required today.

Different manufacturers have their own solutions that are designed to take care of, for example, the punch holes and the distance between the insulation edge and the through connector.


Always note the joint manufacturer's directions regarding maximum lengths and diameters of the connectors. If you are not sure, or if the installation instructions do not indicate what you are considering, consult your joint supplier. At higher voltages, e.g. 52 and 84 kV, other requirements are placed on the through connectors depending on the joint design and design. However, there are solutions where "normal" through connectors are used together with filler materials in the voltage range up to 145 kV.

PEX insulated cable against oil impregnated cable

When installing a transition splice between cables with oil impregnated insulation and PEX insulation at voltages of 12 kV and above, connectors with partitions must be used, regardless of the splicing method and make. AKS, KSF-M and AS connectors always have partitions.

Oil impregnated against oil-imregnated cable

When splicing two cables with this type of insulation, connectors of type AS, AKS, or KSF can be used, whether it is an oil tube connector or a "dry" heat shrink connector.

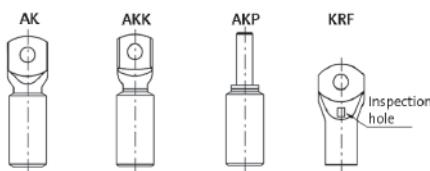



SYSTEM ELPRESS

SYSTEM ELPRESS


System Elpress symbolizes our **cornerstones** – safety and quality. In order to achieve a secure connection, we offer **certified solutions** of the combination cable, terminal and tool.

For perfect crimping connections, **Elpress Academy** offers Crimping Technology training and seminars.




For non-standard solutions you can **consult** us and let our own production and laboratory verify your solution. A preventive **service** maintenance of the tool is the base for the system to work.

Certification, Academy, Consulting and Service is System Elpress – your secure connection!

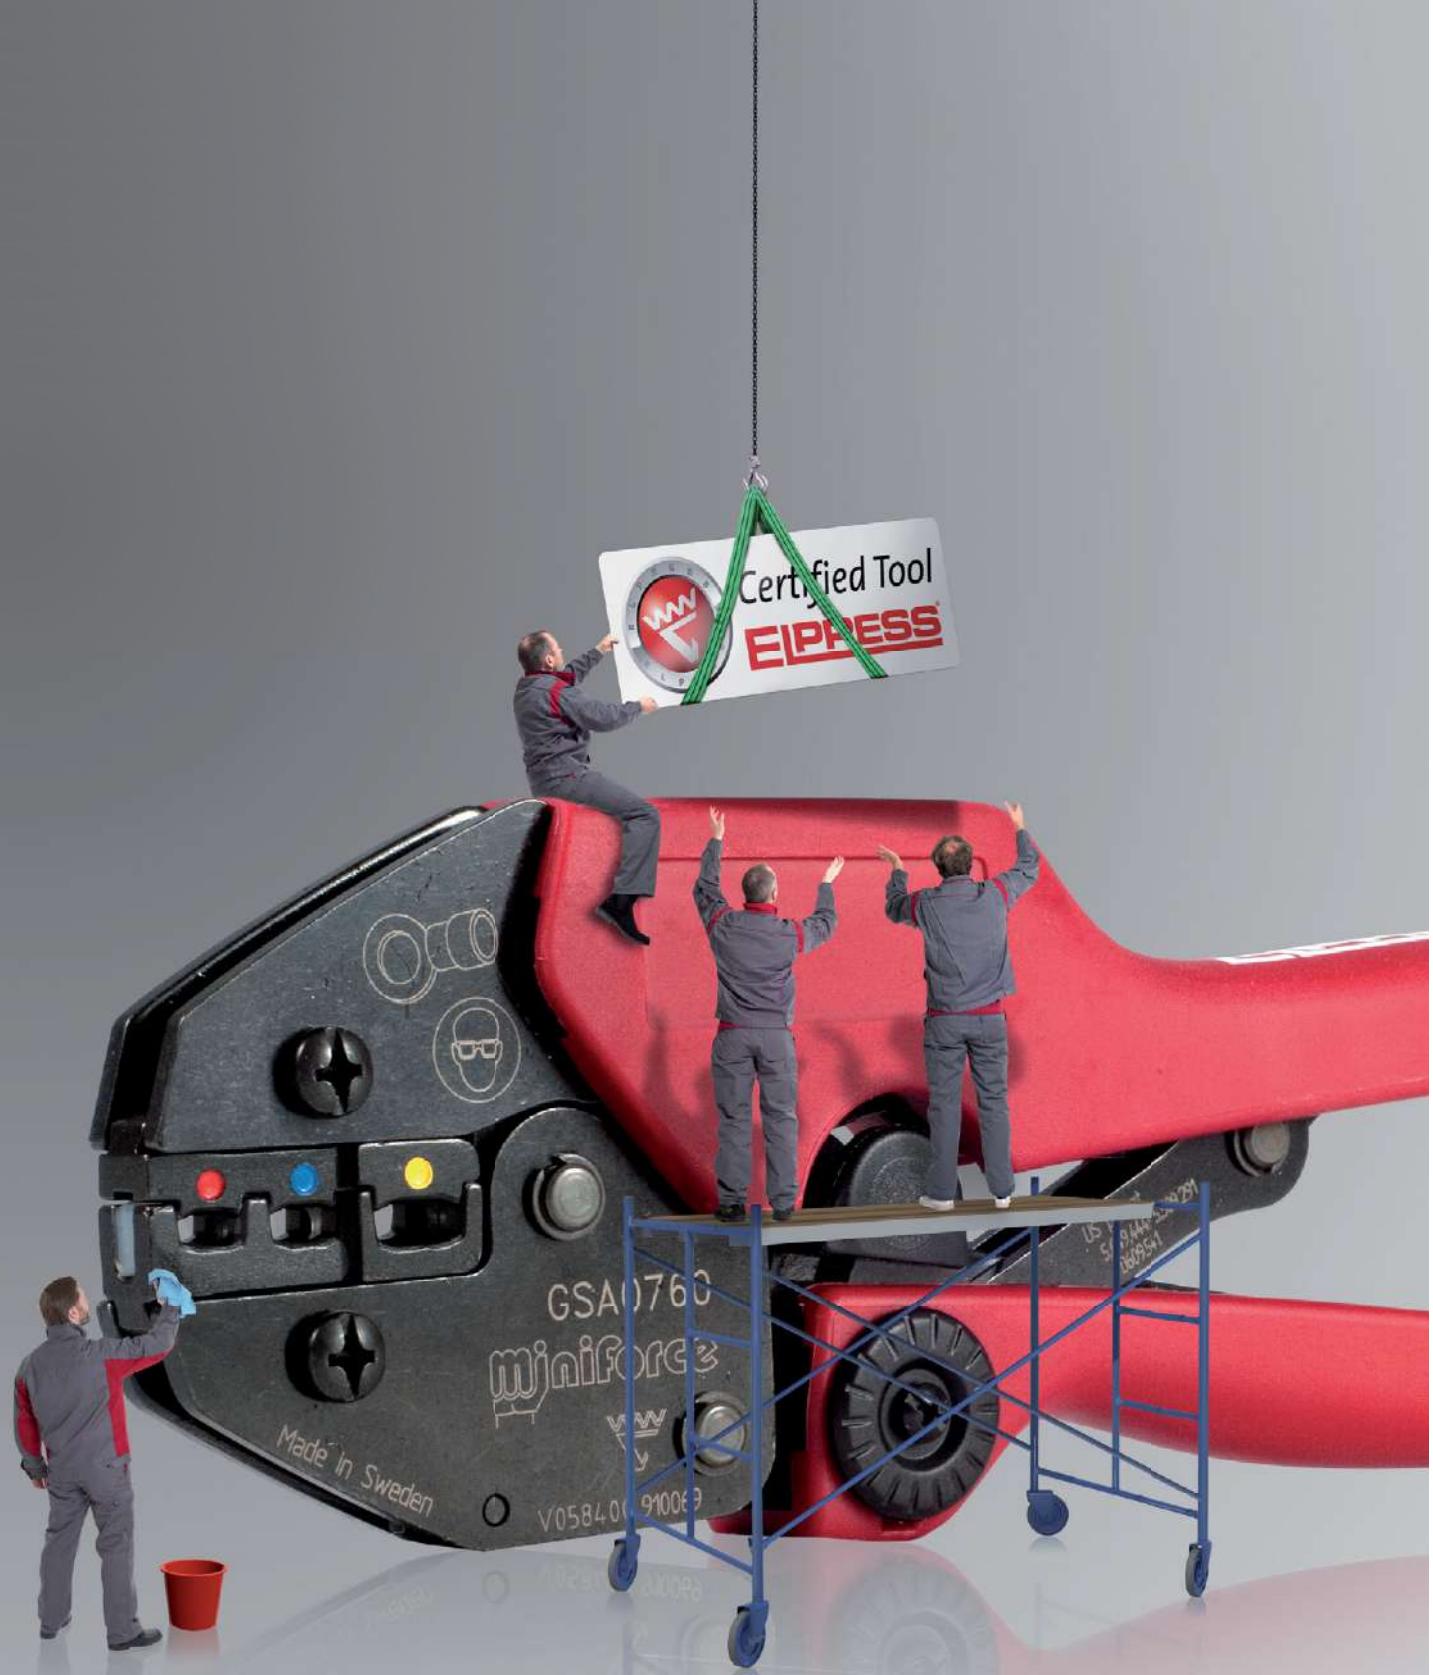

*We manufacture tested systems for electrical connectors
and their tools. You get a secure connection.*

SYSTEM ELPRESS CERTIFICATION

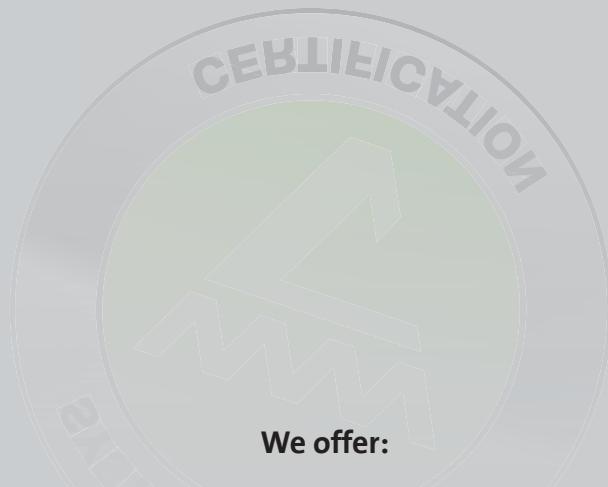

We offer:

Tool delivered with a calibration certificate

Verified and tested combination of cable, terminal and tool

Certified solutions for customized product development

Product approval in accordance with IEC, UL, DNV and CSA

Third part quality and environment certification in accordance with ISO9001 and ISO14001



In order to achieve a secure connection we offer certified solutions of the combination cable, terminal and tool.

This is so that you as customer can feel secure when you use our system and be sure that a safe connection will be made when our products are used correctly.

FOR YOUR SAFETY

The System includes:

- Terminal, connector
- Crimping tool
- Correct cable
- Trained and skilled operator

The system is developed and tested in accordance with existing norms and standards, for example IEC.

Product development

- Customized solutions
- Specialized segment solutions
- Leading technology in our industry
- Innovative products





**Quality & environment certified
and approved according to**

- ISO 14001
- ISO 9001
- DNV
- UL





*We have the necessary resources for you
to maintain the highest quality*

SYSTEM ELPRESS CONSULTING



We offer:

- Tests in laboratory
- Problem solving
- Technical and customer support
- Customized terminals and tools
- Audits and validations at your premises



WHY CONSULT US?


We have been developing, manufacturing and marketing complete cable crimping systems for electrical connectors with more than 50 years of experience. We have therefore the best knowledge and equipment for your requirements and demands.

You will have access to:

- Our Technical Departments that designs and develops customized products and solutions according to your requirements.
- Our Production Team who can manufacture unique solutions.
- Our laboratory who can supply for example
 - Electrical tests
 - Mechanical tests
 - Corrosion- and environmental tests

Contact us and let us assist you.




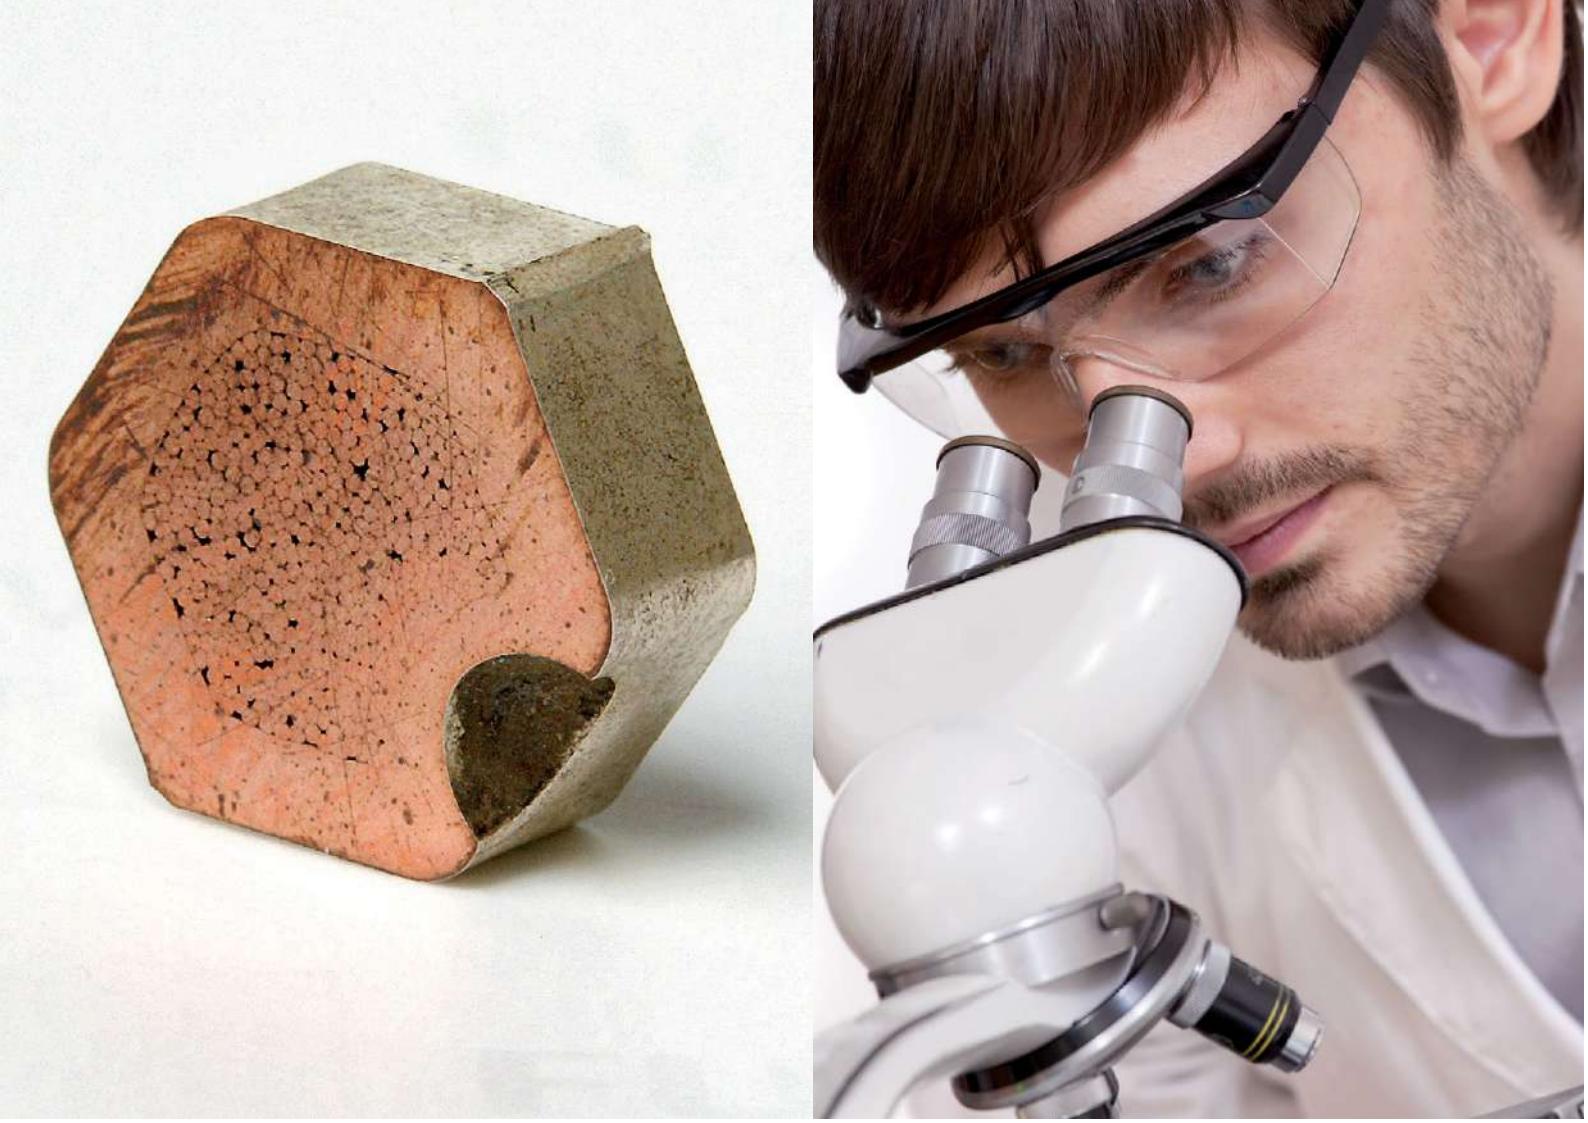



A well educated personnel ensures the final quality of products and services.
Our Academy certificate is a Quality Assurance Document between you and your customer.

SYSTEM ELPRESS ACADEMY

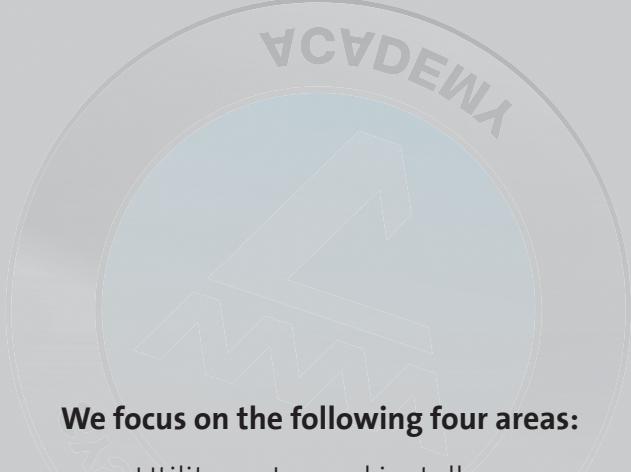

We focus on the following four areas:

- Utility sector and installers
- Transformer manufacturers
- Traction/Train manufacturers
- Wind Power manufacturers



Utility and installation personnel

General training for all staff. Provides a general knowledge of crimping in all areas;

- Terminals below 10 mm²
- Cu-connectors over 10 mm²
- Al-connectors from 16 mm²
- Cu-branching
- Bolt connections
- Deep earthing
- Standards and requirement
- Safety and maintenance
- Quality inspection

The program combines theory and practice and concludes with a written test. Course participants will receive certificate after the completion of their training.

Possibility to customize the training so the content fits the needs of the company.

WHO AND HOW DO WE EDUCATE?

Transformer manufacturers

For operators who work daily in the production. The aim is to train personnel in the special conditions applying in the transformer manufacturing. The training focuses on areas like;

- Management of tools
- Calculations and preparation for crimping
- Work procedure
- Quality inspection
- Safety in use
- Preventive maintenance in daily production

The training consists of a theoretical and a practical part and ends with a written test. Course participants will receive certificate after the completion of their training.

We can provide education for all personnel such as operators, supervisors, designers and quality departments. The education includes a thorough knowledge of calculations, tool selection and management, problems and solutions and quality assessment.



Each training has a level that suits everyone, such as operators, designers, supervisors and quality managers. In addition, there is the possibility to customize the training so that the content fits the needs of the company. You also decide whether the training should be company-based or held in Elpress's training facilities.

Train and vehicle manufacturers

Educate staff in the special demands and external conditions that apply in the manufacturing of rail traffic. The training concerns;

- Management of tools
- Work procedure
- Elpress Dual-technology
- Crimp technique
- Quality inspection
- Safety in use
- Preventive maintenance in daily production

The training consists of a theoretical and a practical part and ends with a written test. Course participants will receive certificate after the completion of their training.

Education for all personnel such as operators, supervisors, designers and quality departments. Provides a thorough knowledge of calculations, tool selection and management, problems and solutions and quality assessment. Completed training gives a certificate.

Wind Power manufacturers

Educate staff in the special demands and external conditions that apply in the manufacture of wind turbines. The training concerns;

- Management of tools
- Work procedure
- Elpress Dual-technology
- Crimp technique
- Quality inspection
- Safety in use
- Preventive maintenance in daily production

The training consists of a theoretical and a practical part and ends with a written test. Course participants will receive certificate after the completion of their training.

Education for all personnel such as operators, supervisors, designers and quality departments. Provides a thorough knowledge of calculations, tool selection and management, problems and solutions and quality assessment. Completed training gives a certificate.



*Preventive maintenance agreements
secure the quality of your connection*

SYSTEM ELPRESS SERVICE





WHAT IS THE BEST SOLUTION FOR YOU?

Preventive maintenance agreements

Our Service offers you a flexible solution for enhanced security, with rapid service and high availability:

- Planned and preventive maintenance guarantees high performance for your equipment.
- Regular service intervals minimize the risk of unforeseen stoppages by indicating any safety or functional defects and by recommending measures to avoid such problems.
- Regular service intervals are normally implemented every 12 months at a fixed price.

Elpress Basic

Elpress Basic service agreement includes following points:

- General inspection of the tool
- Safety aspects in accordance with declaration of conformity
- Function test
- Checking of accessories, e.g. crimp dies etc.
- Issue of Certificate

The inspection follows Elpress final inspection and acceptance inspection requirements.

- The price is based on the service level solution and equipment.
 - A certificate is issued after the equipment has complied with calibration requirements.
- The maintenance can be performed at your premises.

Elpress Advance

Elpress Advance service agreement includes following points:

- Elpress Basic + corrective maintenance

Includes the Calibration/certification and wear & tear repairs at a fixed price.

Calibration of certified tools

The calibration follows the same inspection points and requirements as Elpress Basic, but it is the customer's responsibility to send the tool for calibration.

Purchased a new product?

Send the Product registration form to Elpress and Elpress Basic is included for free the first year.






Table of content

Name	Page	Name	Page	Name	Page	Name	Page
13DB11	33	A1,5-6ET	14	A2543GB	5	KR10-8-90GR	24
13DB13	33	A1,5-8ET	14	A2543K	6	KRDIN1000-20	27
13DB14,5	33	A1,5-8ET2	15	A2543R	4	KRDIN10-10	27
13DB17	33	A10-12ET	14	A2553G	5	KRDIN10-5	27
13DB20	33	A10-14ET2	15	A2553GB	5	KRDIN10-6	27
13DB22	33	A10-18ET	14	A2553R	4	KRDIN10-8	27
13DB25	33	A1-10ET	14	A2565G	5	KRDIN120-10	27
13DB27	33	A1-10ET2	15	A2565R	4	KRDIN120-12	27
13DB30	33	A1-12ET	14	A2585R	4	KRDIN120-16	27
13DB32	33	A1-12ET2	15	A35-16ET	14	KRDIN120-20	27
13DB8	33	A1503FLS5	7	A35-18ET	14	KRDIN150-10	27
13DB9	33	A1503FLS8	7	A35-25ET	14	KRDIN150-12	27
13DCB11	33	A1505FLS5	7	A4-10ET	14	KRDIN150-16	27
13DCB11	42	A1505FLS8	7	A4-12ET	14	KRDIN150-20	27
13DCB13	33	A1507FLS	7	A4-12ET2	15	KRDIN16-10	27
13DCB13	42	A1507FLST	7	A4-18ET	14	KRDIN16-12	27
13DCB14,5	33	A1510R	4	A4-18ET2	15	KRDIN16-6	27
13DCB14,5	42	A1515PSK	9	A4607FLS	7	KRDIN16-8	27
13DCB17	33	A1518SFL	7	A4609FLS	7	KRDIN185-10	27
13DCB17	42	A1519SR	6	A4610G	5	KRDIN185-12	27
13DCB20	33	A1519SRK	6	A4610R	4	KRDIN185-16	27
13DCB20	42	A1525SK	8	A4613R	4	KRDIN185-20	27
13DCB22	33	A1529SF	7	A4630SR	6	KRDIN240-10	27
13DCB25	33	A1529SFN	7	A4634PSK	9	KRDIN240-12	27
13DCB27	33	A1530SFB	7	A4640SF	7	KRDIN240-16	27
13DCB30	33	A1532G	5	A4643G	5	KRDIN240-20	27
13DCB32	33	A1532R	4	A4643R	4	KRDIN25-10	27
13DCB8	33	A1535SKW	8	A4645SFB	7	KRDIN25-12	27
13DCB8	42	A1537G	5	A4650SKW	8	KRDIN25-6	27
13DCB9	33	A1537GB	5	A4652SK	8	KRDIN25-8	27
13DCB9	42	A1537GS	5	A4653G	5	KRDIN300-12	27
20DCB22	42	A1537R	4	A4653R	4	KRDIN300-16	27
20DCB25	42	A1543G	5	A4665G	5	KRDIN300-20	27
20DCB27	42	A1543GB	5	A4665R	4	KRDIN35-10	27
20DCB30	42	A1543K	6	A4685G	5	KRDIN35-12	27
20DCB32	42	A1543R	4	A4685R	4	KRDIN35-6	27
A0,14-6ET	14	A1553G	5	A50-20ET	14	KRDIN35-8	27
A0,14-8ET	14	A1553R	4	A50-25ET	14	KRDIN400-12	27
A0,25-6ET	14	A1565G	5	A6-12ET	14	KRDIN400-16	27
A0,25-8ET	14	A1565R	4	A6-14ET2	15	KRDIN400-20	27
A0,34-6ET	14	A1585R	4	A6-18ET	14	KRDIN500-20	27
A0,34-8ET	14	A16-12ET	14	A6-18ET2	15	KRDIN50-10	27
A0,5-10ET	14	A16-18ET	14	BÄRREM PS710	39	KRDIN50-12	27
A0,5-6ET	14	A1-6ET	14	CS2500	41	KRDIN50-16	27
A0,5-6ET2	15	A1-8ET	14	DB2522	34	KRDIN50-6	27
A0,5-8ET	14	A1-8ET2	15	DB2525	34	KRDIN50-8	27
A0,5-8ET2	15	A2,08-8ET	14	DB2527	34	KRDIN625-20	27
A0,75-10ET	14	A2,5-10ET	14	DB2530	34	KRDIN6-5	27
A0,75-10ET2	15	A2,5-10ET2	15	DB2532	34	KRDIN6-6	27
A0,75-12ET	14	A2,5-12ET	14	DB2538	34	KRDIN6-8	27
A0,75-12ET2	15	A2,5-13ET2	15	DSA0115	12	KRDIN70-10	27
A0,75-6ET	14	A2,5-18ET	14	DSA0725	12	KRDIN70-12	27
A0,75-8ET	14	A2,5-8ET	14	DV1300C2	31	KRDIN70-16	27
A0,75-8ET2	15	A2505FLS5	7	DV250	31	KRDIN70-6	27
A0503FLS5	7	A2505FLS8	7	ESAQ0760	12	KRDIN70-8	27
A0503FLS8	7	A2507FLS	7	FCU-PS710D&E	39	KRDIN800-20	27
A0514SR	6	A2507FLST	7	FCU-PS710R	39	KRDIN95-10	27
A0522R	4	A2510R	4	GEB1025	17	KRDIN95-12	27
A0532G	5	A2513R	4	GEB1025C	17	KRDIN95-16	27
A0532R	4	A25-16ET	14	GEB3550	17	KRDIN95-8	27
A0543R	4	A2517PSK	9	GEB3550C	17	KRF120-10	20
A0553R	4	A25-18ET	14	GEB4010C	17	KRF120-10-45GR	23
A0819SR	6	A2519SR	6	GEB4010C-TWIN	16	KRF120-10-90GR	24
A0819SRK	6	A2519SRK	6	GSA0760	10	KRF120-10-90GR-SB	24
A0824SK	8	A25-22ET	14	GSA0760C	10	KRF120-10X2-24-26	22
A0825FK	7	A2524SFL	7	GSEA0340C	11	KRF120-12	20
A0832G	5	A2527SK	8	GSEA0340C	16	KRF120-12-45GR	23
A0832R	4	A2529SF	7	GSW0560C	11	KRF120-12-90GR	24
A0837G	5	A2529SFN	7	HYD.SLANG KPL. 2,4M ERG PS710E	39	KRF120-12-90GR-SB	24
A0837R	4	A2530SFB	7	HYD.SLANG KPL. 2,4M ERGOCOM	39	KRF120-12X2-40	22
A0843G	5	A2532G	5	HYD.SLANG KPL. 5M ERGO PS710E	39	KRF120-16-45GR	23
A0843R	4	A2532R	4	HYD.SLANG KPL. 5M ERGO PS710R	39	KRF120-16-90GR	24
A0853R	4	A2535SKW	8	HYD.SLANG KPL. 5M ERGOCOM	39	KRF120-16-90GR-SB	24
A1,5-10ET	14	A2537G	5	HYD.SLANG KPL.2,4M ERGO PS710R	39	KRF120-16-90GR-SB	24
A1,5-12ET	14	A2537GS	5	KR10-6-45GR	23	KRF120-8-90GR	24
A1,5-12ET2	15	A2537R	4	KR10-6-90GR	24	KRF120-8-90GR-SB	24
A1,5-18ET	14	A2543G	5	KR10-8-45GR	23	KRF150-10	20

Table of content

Name	Page	Name	Page	Name	Page
KRF150-10-45GR	23	KRF400A-20	20	KRFS70-8	21
KRF150-10-90GR	24	KRF400A-24	20	KRFS95-10	21
KRF150-10-90GR-SB	24	KRF500-00	20	KRFS95-12	21
KRF150-10X2-24-26	22	KRF500-12	20	KRFS95-6	21
KRF150-12	20	KRF500-14	20	KRFS95-8	21
KRF150-12-45GR	23	KRF500-16	20	KS0,75	25
KRF150-12-90GR	24	KRF500-20	20	KS1,5	25
KRF150-12-90GR-SB	24	KRF500-24	20	KS10	25
KRF150-12X2-40	22	KRF50-10	20	KS10M	26
KRF150-16	20	KRF50-10-45GR	23	KS2,5	25
KRF150-16-45GR	23	KRF50-10-90GR	24	KS4	25
KRF150-16-90GR-LB	24	KRF50-10X2-24-26	22	KS6	25
KRF150-16-90GR-SB	24	KRF50-10X2-40	22	KSF120	25
KRF150-20	20	KRF50-12	20	KSF120M	26
KRF16-10	20	KRF50-12-45GR	23	KSF150	25
KRF16-10-45GR	23	KRF50-12-90GR	24	KSF150M	26
KRF16-10X2-24-26	22	KRF50-16	20	KSF16	25
KRF16-10X2-40	22	KRF50-6	20	KSF16M	26
KRF16-12	20	KRF50-8	20	KSF185	25
KRF16-6	20	KRF50-8-45GR	23	KSF185M	26
KRF16-6-45GR	23	KRF50-8-90GR	24	KSF240A	25
KRF16-6-90GR	24	KRF630-00	20	KSF240AM	26
KRF16-6X2-16	22	KRF630-12	20	KSF25	25
KRF16-8	20	KRF630-16	20	KSF25M	26
KRF16-8-45GR	23	KRF630-20	20	KSF300A	25
KRF16-8-90GR	24	KRF630-24	20	KSF300AM	26
KRF185-10	20	KRF70-10	20	KSF35	25
KRF185-10-90GR-SB	24	KRF70-10-45GR	23	KSF35M	26
KRF185-10X2-24-26	22	KRF70-10-90GR	24	KSF400A	25
KRF185-12	20	KRF70-10X2-24-26	22	KSF400AM	26
KRF185-12-90GR-SB	24	KRF70-12	20	KSF50	25
KRF185-12X2-40	22	KRF70-12-45GR	23	KSF500	25
KRF185-16	20	KRF70-12-90GR	24	KSF500M	26
KRF185-16-90GR-SB	24	KRF70-12X2-40	22	KSF50M	26
KRF185-20	20	KRF70-16	20	KSF630	25
KRF240A-10	20	KRF70-6	20	KSF70	25
KRF240A-10X2-24-26	22	KRF70-8	20	KSF70M	26
KRF240A-12	20	KRF70-8-45GR	23	KSF800	25
KRF240A-12X2-40	22	KRF70-8-90GR	24	KSF95	25
KRF240A-16	20	KRF800-00	20	KSF95M	26
KRF240A-20	20	KRF800-16	20	P1000	40
KRF25-10	20	KRF800-24	20	P4000	40
KRF25-10-45GR	23	KRF95-10	20	PEB0110T	18
KRF25-10-90GR	24	KRF95-10-45GR	23	PEB0110T18	18
KRF25-10X2-40	22	KRF95-10-90GR	24	PEB0116H	18
KRF25-12	20	KRF95-10X2-24-26	22	PEB0116S	18
KRF25-14X2-40	22	KRF95-12	20	PS710D	37
KRF25-6	20	KRF95-12-45GR	23	PS710E	38
KRF25-6-45GR	23	KRF95-12-90GR	24	PS710E251	38
KRF25-6-90GR	24	KRF95-12X2-40	22	PS710E251-US	38
KRF25-6X2-16	22	KRF95-16	20	PS710E501	38
KRF25-8	20	KRF95-16-45GR	23	PS710E501-US	38
KRF25-8-45GR	23	KRF95-16-90GR	24	PVX1300	29
KRF25-8-90GR	24	KRF95-8	20	PVX1300-ADV	29
KRF25-8X2-40	22	KRFS120-10	21	PVX1300C2	30
KRF300A-10	20	KRFS120-12	21	PVX1300C2-ADV	30
KRF300A-12	20	KRFS120-6	21	PVX1300C2DB	30
KRF300A-12X2-40	22	KRFS120-8	21	PVX1300C2DB-ADV	30
KRF300A-16	20	KRFS150-10	21	PVX1300C2DB-US	30
KRF300A-20	20	KRFS150-12	21	PVX1300C2-US	30
KRF300A-24	20	KRFS150-6	21	PVX1300C2-WOBC	30
KRF35-10	20	KRFS150-8	21	PVX1300DB	29
KRF35-10-45GR	23	KRFS185-10	21	PVX1300DB-ADV	29
KRF35-10-90GR	24	KRFS185-12	21	PVX1300DB-US	29
KRF35-10X2-24-26	22	KRFS240A-10	21	PVX1300-US	29
KRF35-10X2-40	22	KRFS240A-12	21	PVX1300-WOBC	29
KRF35-12	20	KRFS240A-16	21	PVX1300-WOBC-ADV	29
KRF35-6	20	KRFS300A-10	21	PZD3	16
KRF35-6-45GR	23	KRFS300A-12	21	TS1300	32
KRF35-6-90GR	24	KRFS300A-16	21	TS1300AL	32
KRF35-8	20	KRFS400A-12	21	TS1300CU	32
KRF35-8-45GR	23	KRFS400A-16	21	V1300	30
KRF35-8-90GR	24	KRFS50-10	21		
KRF400A-00	20	KRFS50-6	21		
KRF400A-12	20	KRFS50-8	21		
KRF400A-12X2-40	22	KRFS70-10	21		
KRF400A-16	20	KRFS70-6	21		

Europe

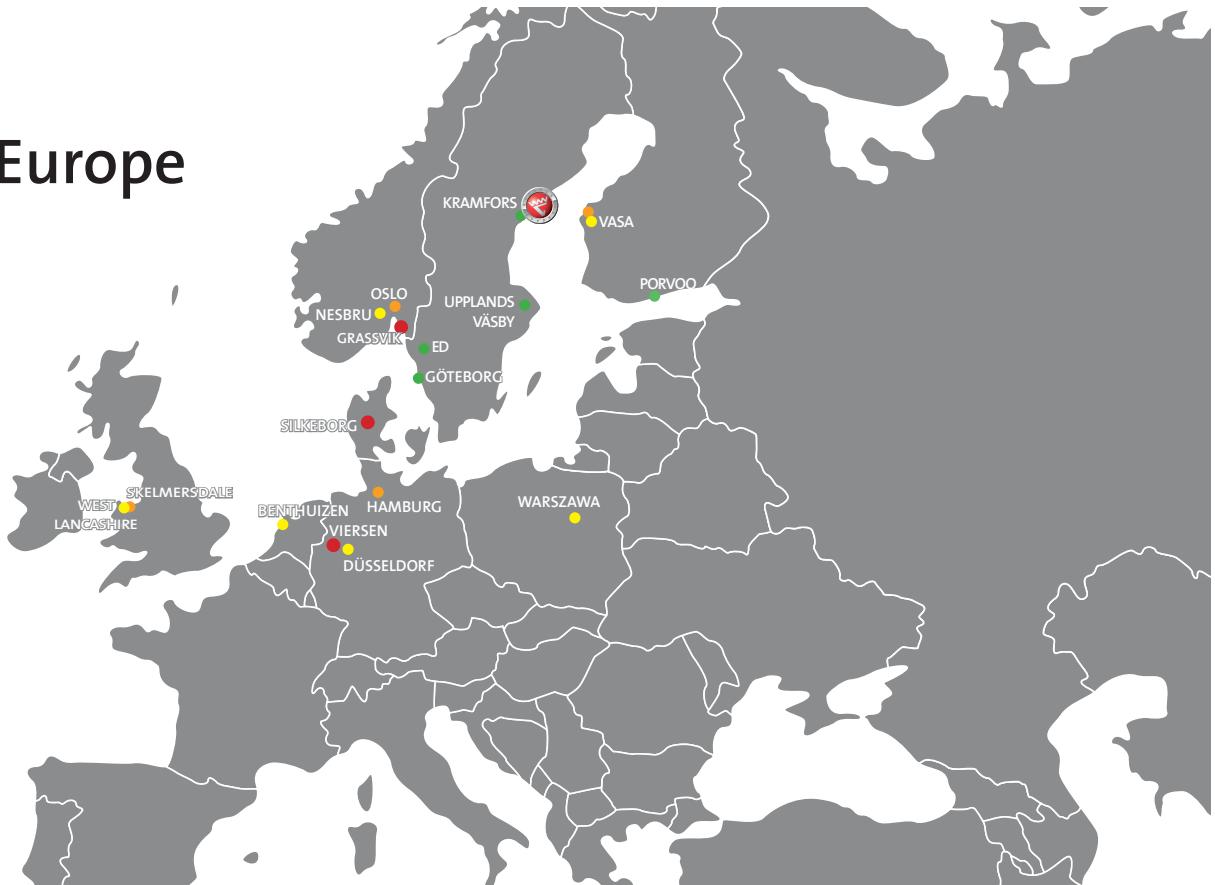

USA



Asia



Head office and production



Elpress AB, Kramfors Sweden

Subsidiaries

- Elpress AS, Gressvik Norway
- Elpress A/S, Silkeborg Denmark
- Elpress GmbH, Viersen Germany
- Elpress China, Beijing China
- Elpress Inc, Chicago USA

Sales

- Region north Sweden, Kramfors
- Region middle Sweden, Upplands Väsby
- Region south Sweden, Gothenburg
- Sales office, Ed
- Suomi, Porvoo
- India, New Delhi



Service partners

- Hydraulikkteknikk, Hagan (Oslo) Norway
- Enkom, Vasa Suomi
- Hamburger Hochdruck Hydraulik, Hamburg Germany
- E-Tech Components, Skelmersdale UK
- Precision Hydraulics, Portland USA



Distributors och partners

- Unitronic GmbH, Düsseldorf Germany
- Enkom-Active Oy, Helsingby Soumi
- JF Knudtzen AS, Nesbru Norway
- Jobarco, Br Benthuizen Netherlands
- ACTE Sp. Z o.o., Warszawa Polen
- E-Tech Components, West Lancashire UK



ELPRESS®

