


Non-Conductive Cable Grips

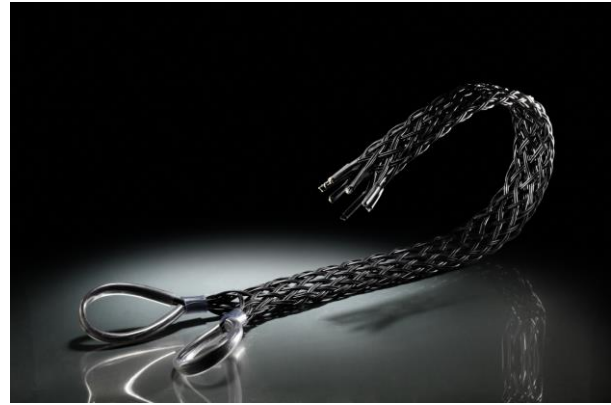

Ideal for use in water, fibre-optic applications, offshore or for a multitude of uses in the electrical industry; dramatically improved weight to break ratio and made of a high-strength, non-conductive aramid fibre

Non-conductive grips are available in both single and double eye

Code	Cable Diameter (mm)	Lattice Length (mm)	Approx. Breaking Strength (Kg)
Single Eye Single Weave			
<u>NCSE10-20</u>	10-20	600	1,115
<u>NCSE20-30</u>	20-30	600	1,620
<u>NCSE30-40</u>	30-40	600	2,230
<u>NCSE40-50</u>	40-50	600	2,640
Single Eye Double Weave			
<u>NCSE30-40HD</u>	30-40	600	4,470
<u>NCSE40-50HD</u>	40-50	600	5,390
<u>NCSE50-65</u>	50-65	600	7,210
<u>NCSE65-80</u>	65-80	600	7,210
<u>NCSE80-100</u>	80-100	600	7,210
Double Eye Single Weave			
<u>NCDE10-20</u>	10-20	600	1,115
<u>NCDE20-30</u>	20-30	600	1,620
<u>NCDE30-40</u>	30-40	600	2,230
<u>NCDE40-50</u>	40-50	600	2,640
Double Eye Double Weave			
<u>NCDE30-40HD</u>	30-40	600	4,470
<u>NCDE40-50HD</u>	40-50	600	5,390
<u>NCDE50-65</u>	50-65	600	7,210
<u>NCDE65-80</u>	65-80	600	7,210
<u>NCDE80-100</u>	80-100	600	7,210

TWS are proactive in product development and enhancement and as such the specifications are subject to alteration without prior notice