


Triplex Galvanised Cable Grips

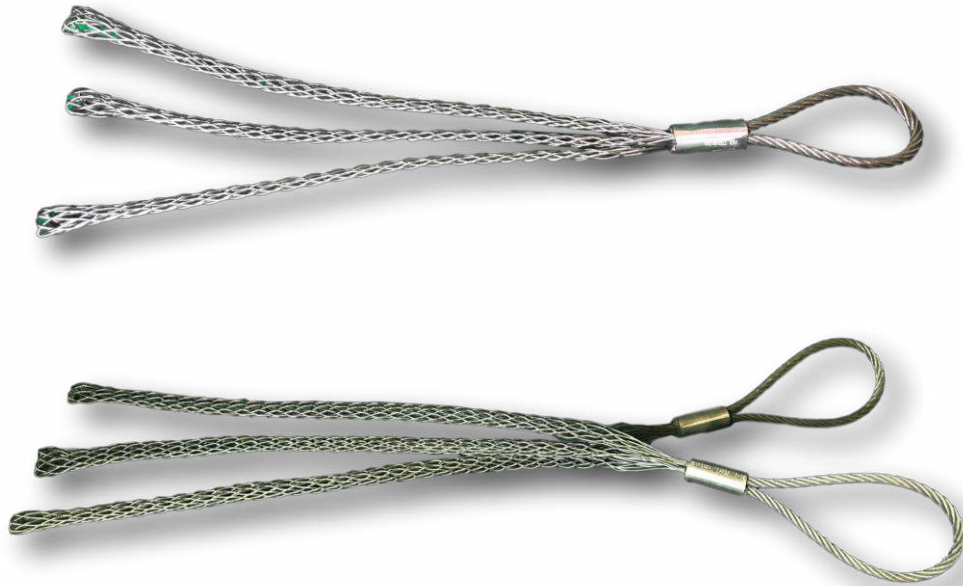

Triplex cable grips have become more cost effective and popular as a means of efficiently pulling 3 cables at once and are used in lieu of the conventional method of a 3 way pulling harnesses and individual single eye grips

Triple grips are available in both single and double eye

Code Single Eye	Code Double Eye	Cable Diameter (mm)	Lattice Weave	Lattice Length (mm)	Overall Length (mm)	Approx. Breaking Strength (Kg)
<u>TSE6-13</u>	<u>N/A</u>	6-13	Single	230	305	760
<u>TSE13-19</u>	<u>TDE13-19</u>	13-19	Single	355	430	1015
<u>TSE19-25</u>	<u>TDE19-25</u>	19-25	Single	405	510	2540
<u>TSE25-38</u>	<u>TDE25-38</u>	25-38	Single	455	610	3555
<u>TSE38-50</u>	<u>TDE38-50</u>	38-50	Double	535	735	5080
<u>TSE50-63</u>	<u>TDE50-63</u>	50-63	Double	610	865	5080
<u>TSE63-89</u>	<u>TDE63-89</u>	63-89	Double	685	990	6095
<u>TSE89-115</u>	<u>TDE89-115</u>	89-115	Double	685	990	7110

*Cable grips are also available in single eye, double eye, lace up and open ended

TWS are proactive in product development and enhancement and as such the specifications are subject to alteration without prior notice