



SECTION 09: BENCH OUTLET BOXES & PERIMETER TRUNKING

Skirting Trunking

Unitrunk Skirting Trunking is easily fitted and is available in 3m lengths with all the necessary bends, etc. to form a complete installation. Trunking is designed for installation after wall and floor surfaces have been completed. Tee Pieces, Pier Sets, etc. can be supplied to customer requirements.

Dado Trunking

Unitrunk Dado trunking is available in 3m lengths with all the necessary bends etc, to form a complete installation.



Unitrunk Bench Trunking is manufactured with a galvanised sheet steel body to BS EN 10346:2015 in 3m lengths as standard. Alternative lengths can be supplied to order to suit any application. Each length is provided with coupling and screws. The cover can be supplied punched to accept socket outlets or other accessories.



ACCREDITED TO THE FOLLOWING STANDARDS:



Uniklip

BENCH OUTLET BOXES & PERIMETER TRUNKING



Unitrunk Skirting Trunking

Easily fitted and available with all the necessary bends, etc. to form a complete installation. Types S1 and S2 are designed for installation after wall and floor surfaces have been completed. Tee pieces, Threshold Units, Pier Sets, etc. can be supplied to customer requirements.

The body and divider of the standard skirting trunking are manufactured from galvanised sheet steel to BS EN 10346:2015.

The cover is made from galvanised sheet steel and can be finished in epoxy/polyester coating of any colour on request. All trunking is supplied in 3m lengths as standard, complete with joining plates and screws.


S1 and S2 trunking is supplied with compartments as shown and is therefore suitable for carrying mains, telephone and VDU or other low voltage circuits. The dividers have provision every 200mm along the length, with 20mm EKOs to allow access between compartments. A Back Box is also available on request for complete segregation.

It is normal practice to run the mains circuit in the larger compartment as the cover can be punched to accept a standard 13 amp socket or other accessory. Alternatively a short section of cover can be supplied with one or two gang socket outlet. Socket plates and accessories are manufactured to overlap at the edges.







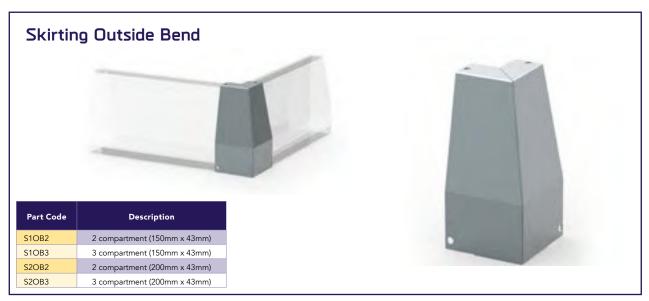





Index

BENCH OUTLET BOXES & PERIMETER TRUNKING



S1S1	Single Socket (150mm x 43mm)
S1S2	Double Socket (150mm x 43mm)
S2S1	Single Socket (200mm x 43mm)
S2S2	Double Socket (200mm x 43mm)
Skirtin	g Back Boxes



Part Code	Description
S1S1BBX2	Single Socket - 2 Comp. (150mm x 43mm)
S2S1BBX2	Single Socket - 2 Comp. (200mm x 43mm)



Part Code	Description
S1S1BBX3	Single Socket - 3 Comp. (150mm x 43mm)
S2S1BBX3	Single Socket - 3 Comp. (200mm x 43mm)



Part Code	Description
S1S2BBX2	Double Socket - 2 Comp. (150mm x 43mm)
S2S2BBX2	Double Socket - 2 Comp. (200mm x 43mm)



Part Code	Description
S1S2BBX3	Double Socket - 3 Comp. (150mm x 43mm)
S2S2BBX3	Double Socket - 3 Comp. (200mm x 43mm)



Unitrunk Dado Trunking

Available with all the necessary bends, etc., to form a complete installation. The body and divider of the DAD-TK are manufactured from galvanised sheet steel to BS EN 10346:2015. The dividers are provided with 20mm E knockouts for easy access to all compartments at 200mm centres. A Back Box is also available on request for complete segregation. All trunking is supplied in 3m lengths as standard, complete with joining plates and screws.

The cover is made from galvanised sheet steel and can be finished in epoxy polyester coating of any colour on request. The trunking is suitable for carrying mains, telephone and VDU or other low voltage circuits.

It is normal practice to run the mains circuit in the larger compartment as the cover can be punched to accept astandard 13 amp socket or other accessory.

Alternatively a short section of cover can be supplied with a one or two gang socket outlet. Socket plates and accessories are manufactured to overlap at the edges of the trunking cover.












Dado Flat Bend

Part Code	Description
DADFB62	Single compartment (152mm x 51mm)
DADFB62x3	3 compartment (152mm x 51mm)
DADFB82	Single compartment (202mm x 51mm)
DADFB82x3	3 compartment (202mm x 51mm)







Bench Trunking

Manufactured with a galvanised sheet steel body and lid to BS EN 10142 in 3m lengths as standard. Alternative lengths can be supplied to order to suit any application. Each length is provided with coupling and screws. The cover can be supplied punched to accept socket outlets or other accessories. If required, a dividing fillet (25mm high) can be supplied in position. The trunking cover can also be supplied with epoxy/polyester finish in any colour to order.

















