



PRODUCT MANUFACTURED BY
DAMAGE PREVENTION
SOLUTIONS

Get in touch

To order this product contact your local 3M sales professional.

To learn more about this product visit 3M.co.uk/LocatingAndMarking

3M and Dynatel are trademarks of 3M Company. Damage Prevention Solutions is a trademark of Damage Prevention Solutions, LLC.

Warranty and limited remedy: 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M product or refund of the purchase price.

Limitation of liability: Except for the limited remedy above, and except to the extent prohibited by applicable law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal or equitable theory asserted.

For industrial/occupational use only. Not for consumer sale or use.



Changing the frequency

3M™ Electronic Marking System (EMS)
Warning Tape 7900 Series



3M Electrical Markets Division

3M United Kingdom
3M Centre, Cain Road
Bracknell
RG12 8HT

3M A/S
Hannemanns Alle 53
2300 Copenhagen S
Denmark

Suomen 3M Oy
Keilaniementie 1,
02150 Espoo
Finland

3M Norge AS
Tærudgata 16
2004 Lillestrøm
Norway

3M Svenska AB
Herrjärvtorg 4
170 67 Solna
Sweden

Please recycle. © 3M 2022.
All rights reserved.
80-6016-0918-5.
OMG289115

Introducing the 3M™ Electronic Marking System (EMS) Warning Tape 7900-XT Series for underground utilities.

Take a new approach to path marking with 3M™ Electronic Marking System (EMS) Warning Tape 7900-XT Series. It helps alert users there is a risk of damage when digging near underground utility lines by providing visual verification powered by our EMS technology.

3M's latest line of tapes offer a virtually maintenance-free solution to help eliminate challenges and costs associated with tracer wire and test stations. For use in open trench applications, 3M™ EMS Warning Tape 7900-XT Series uses radio frequency (RF) path markers that work independently. If a section of path marking tape is cut or removed, the other markers on the tape will continue to provide an accurate location.

The tape also features a high strength core material called extreme tensile (XT) which provides an early warning for excavators that an underground asset is below.

All tape models support custom text so you can add your company logo.

Features of 3M™ EMS Warning Tape 7900-XT Series.

EMS 

Benefit:

Provides a unique frequency to differentiate each utility.

Application:

Available in six frequencies. 3M™ EMS-enabled tapes create unique frequencies for each utility, making them ideal for customers who need to locate and differentiate multiple underground utilities.

XT 

Benefit:

XT features 13 kN strength material and includes a built-in early warning system which causes the tape to pull up from the ground and resist breakage when excavated.

Application:


XT-enabled tapes are suited for customers whose primary concern is damage to their assets and want quality tape that helps alert the user if there is risk of damage from excavation.

Which 3M™ Path Marker is best for your project?

At 3M, we recognise that each job is different. The chart below will help you determine whether the latest 3M™ EMS Warning Tape 7900-XT Series or 3M™ EMS Caution Tape 7900 Series is right for your job.

	Roll length	Sizes/tensile strength	Depth	Utilities available: product code
3M™ EMS Warning Tape 7900-XT Series (EMS and XT)	500 ft (152 m)	4"/3000lb (10 cm/13 kN)	< 4 ft (1.2 m)	Telecommunications: 7901-XT
				Power: 7902-XT
				Water: 7903-XT
				Waste water: 7904-XT
				Gas: 7905-XT
3M™ EMS Caution Tape 7900 Series (EMS only)	500 ft (152 m)	6"/360lb (15 cm/1.6 kN)	< 4 ft (1.2 m)	Reclaimed water: 7908-XT
				Telecommunications: 7901
				Power: 7902
				Water: 7903
				Waste water: 7904
				Gas: 7905
				Reclaimed water: 7908

The optimal depth for the early warning system is < 2 ft (60 cm) while embedded. EMS markers are locatable < 4 ft (1.2 m).

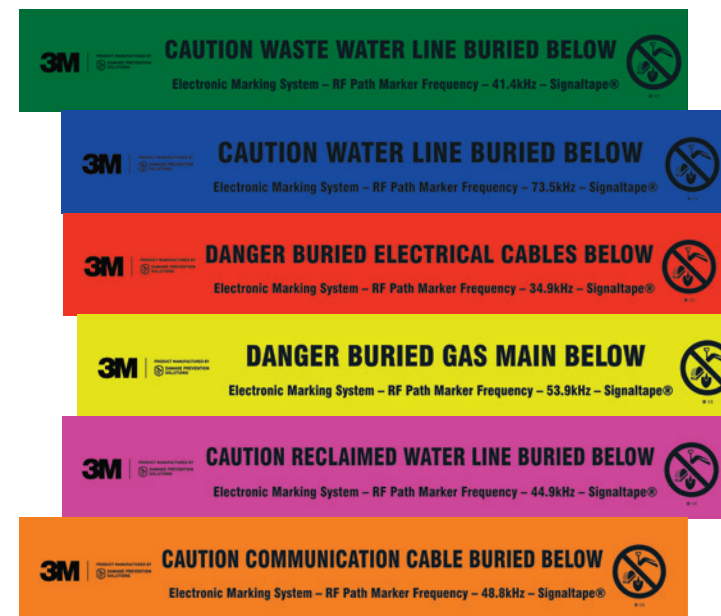

Compatible with 3M™ Dynatel™ Locators 7000 Series.