

MV cables Tools

MF2/60



Certifications

Approved by ENEDIS

Section

MV Multifunction

Application

Field

Laboratory



PRODUCT BENEFITS

Tuning of the pitch of the tool
Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter 16 - 58 mm
0,630 - 2,283 inch

Outer sheath and insulation thickness capacity 7 mm / 0,275 in

TOOL DIMENSIONS

Length 170 mm

Width 90 mm

Height 120 mm

Weight without box 1,4 Kg

Packaging Box

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr


Multifunction tool for outer sheath and insulation

TO DO WHAT

The MF2/60 enables the user to :

Remove the outer sheath (PE-PVC-PR) with a straight and neat cut

Set the length and remove thicker insulation with a straight and neat cut

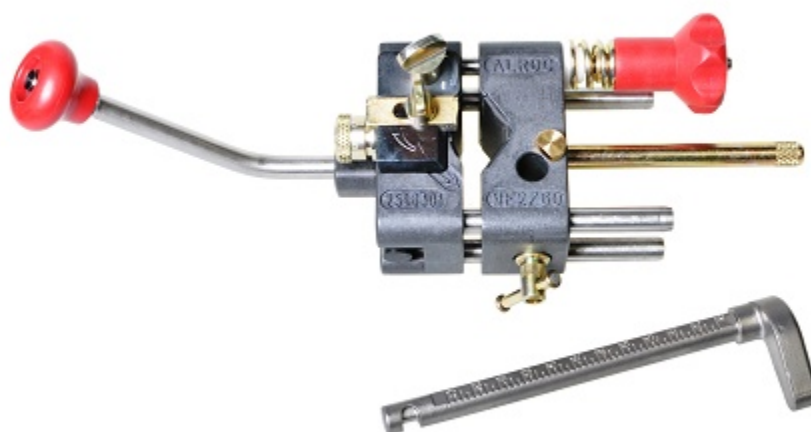

Spare part

KIT-MF3/40 - Protective wear pads

LMF2 - Spare blade for primary insulation

BR - Thrust to set the length of insulation to be remove

VBB1 - Screw for locking the thrust

PCR - Quick set up right angled 45° handle

196855 - Straight handle M10

108098 - Clamping knob for blade

Associated tool

MF1+/25 - Multifunction tool for bonded semiconductor

SRC - Scoring stylus for peelable semiconductor with chamfer



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Outer sheath and insulation thickness capacity	Length	Width	Height	
MF2/40	16 - 40 mm 0,630 - 1,575 in	7 mm / 0,275 in	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	box
MF2/40-S	16 - 40 mm 0,630 - 1,575 in	11 mm / 0,433 in	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	box
MF2/60	16 - 58 mm 0,630 - 2,283 in	7 mm / 0,275 in	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	box
MF2/60-S	16 - 58 mm 0,630 - 2,283 in	11 mm / 0,433 in	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	box