




# SUNSYNK-G5.3

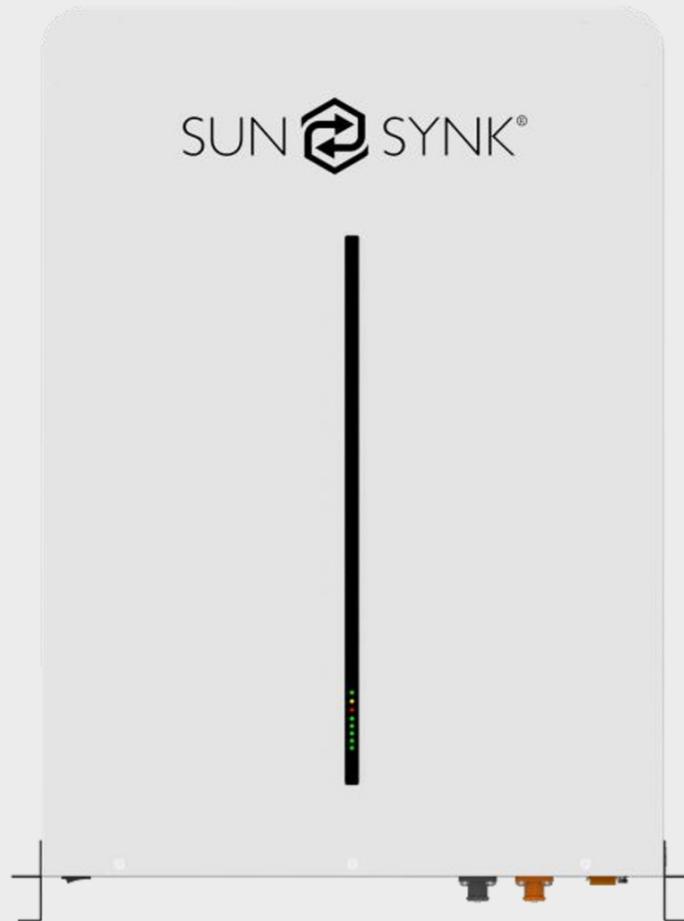

## DATASHEET

[www.sunsynk.com](http://www.sunsynk.com)  
[sales@sunsynk.com](mailto:sales@sunsynk.com)  
[customerservices@sunsynk.com](mailto:customerservices@sunsynk.com)

v.5 (30/04/24)

 **PLEASE RETAIN FOR  
FUTURE REFERENCE**

Model		SUNSYNK-G5.3
Main Parameter		
Battery Chemistry		Lithium Ferro Phosphate (LifePO4 or LFP)
Capacity		104 Ah
Scalability		Max. 32 pcs in parallel (170kWh)
Nominal Voltage		51.2 V
Operating Voltage		43.2~57.6 V
Energy		5.32 kWh
Usable Energy <sup>[1]</sup>		4.79 kWh
Charge/Discharge Current	Recommend <sup>[2]</sup>	50 A
	Max. <sup>[2]</sup>	100 A
	Peak (2mins,25°C)	150 A
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W/H/D)		440*600*133.2 mm (don't include Circuit Breaker, terminals and hanging boards)
Weight		44 kg
Master LED Indicator		5 LED (SOC 20%~100%)
		3 LED (working, alarming, protecting)
IP Rating of Enclosure		IP20
Working Temperature		Charge: 0°C ~ +55°C (optional heating: -20°C~+55°C) Discharge: -20°C ~ +55°C
Storage Temperature		-20°C ~ +35°C
Humidity		5% ~ 95%
Altitude		≤2000m
Cycle Life		≥6000 (25±2°C, 90%DOD, 0.5C/0.5C, 70%EOL)
Installation		Wall Mounted (Support 19-inch standard cabinet)
Communication Port		CAN2.0, RS485
Life Cycle Power During Warranty Period <sup>[3]</sup>		16MWh@70%EOL
Certification		CE, UK, UN38.3

<sup>[1]</sup> DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25° C. System usable energy may vary due to system configuration parameters.

<sup>[2]</sup> The current is affected by temperature and SOC.

<sup>[3]</sup> The warranty is due whichever reached first of warranty period or energy throughout.



DC 125A Circuit Breaker





## CONTACT US

**Call us:** +44 151 832 4300 **Email us:** [sales@sunsynk.com](mailto:sales@sunsynk.com)

**HK Address:** Room 702-704, 7/F Texwood Plaza, 6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.

**UK Address:** Sunsynk UK Ltd, 17 Turnstone Business Park, Mulberry Avenue, Widnes, Cheshire, WA8 0WN.

**SA Address:** Globaltech Sunsynk South Africa (Pty) Ltd, Unit 2 Highview Boulevard, Ferndale 2194.

**NL Address:** Sunsynk NL BV, Henri Wijnmalenweg 8, 5657 EP Eindhoven, Netherlands.

GlobalTech Ltd



Powered by  
SUN SYNK



All Enquiries: tel: +44 (0)1744 762 929 | email: [sales@etechcomponents.com](mailto:sales@etechcomponents.com) | web: [www.etechcomponents.com](http://www.etechcomponents.com)