


A2 Cable Gland Kits

A2 Cable Gland Kits

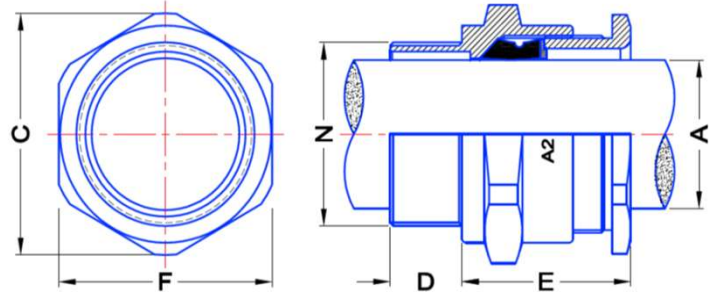

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Standard	BS EN 624444:2013, BS 6121 Part-1 1989, EN 50262:1999
Application	External or internal for use with all types on unarmoured cables
Function	Produces seal on outer sheath of the cable
Ingress Protection	IP66 (with thread seal) EN60529
Material	Brass (Nickle plated versions or stainless steel available upon request)
Shroud	LSF PVC
Seals	PCP (Black)
Thread	Metric
Operating Temperature	Standard Seals -20° C to + 80° C
Kit Contents	Gland, Locknut, Nylon Thread Seal, LSF Shroud (M16-M32 2 per kit, M40-M90 1 per kit) 'Additional Earth Tags are available upon request'

Gland Size Ref.	Entry Threads		Cable Dia. Details		Hexagonal Details		Assembled Length Approx. 'E'
	Dia	Length	'A'	'A'	A/F	A/C	
	'N'	'D'	Min	Max	F'	C'	
A2-16	16	15	3.5	9.0	20.0	22.2	20.0
A2-20SS	20	15	3.5	9.0	22.0	24.4	20.0
A2-20S	20	15	8.0	11.8	22.0	24.4	21.0
A2-20	20	15	11.0	13.8	25.0	27.7	21.0
A2-25	25	15	13.0	19.8	32.0	35.6	23.0
A2-32	32	15	19.0	26.4	41.0	45.5	28.0
A2-40	40	20	25.0	32.4	48.0	53.3	31.0
A2-50S	50	20	31.5	38.0	60.0	66.6	33.0
A2-50	50	20	36.5	44.0	65.0	72.1	33.0
A2-63S	63	20	42.5	49.0	75.0	83.2	35.0
A2-63	63	20	48.5	55.5	80.0	88.8	35.0
A2-75S	75	20	54.5	62.0	84.0	93.2	36.0
A2-75	75	20	60.5	67.0	90.0	100.0	36.0
A2-82	82	20	66.0	72.0	100.0	111.1	39.0
A2-90	90	20	70.0	79.0	106.0	117.6	39.0

Dimensions are in millimeters