

Product Catalogue

2024





Scan the QR
to watch our full
range of videos
and tutorials...



WISKA UK Ltd

Unit 7 Hurling Way
St Columb Major Business Park
St Columb Major, Cornwall
TR9 6SX

☎ +44-(0)1208 816062

☎ +44-(0)1208 816708

info@wiska.co.uk

www.wiska.co.uk

www.wiskaonline.co.uk



About us...

WISKA UK Ltd

Established in 2000, WISKA UK Ltd is the UK's market leader in the manufacture and supply of Junction Boxes, Cable Glands and Gel/ Gel Jointing products.

Our products are designed, developed and tested extensively, ensuring they meet the highest demands under the toughest of conditions. These tests are conducted by our team of highly skilled Designers and Engineers at our state of the art laboratory facilities in WISKA Germany.

These same exacting standards are applied to service at WISKA UK Ltd. With a wealth of product knowledge, our team can help support you in providing quality solutions for your business, project or requirement.

Award winning products and service from WISKA UK.

WISKA, make power smile.



Introducing... ShieldGLAND



ShieldGLAND

The WISKA ShieldGLAND has been designed to replace a CW gland, making it easier to install and giving greater clamping and protection over standard glands. The special gasket supplied enables additional clamping on cable sizes and the unique cone can be placed differently for either use with SWA or CY/SY cables. In addition to this the outer protection on the gland used to replace the shroud is LSF/LSOH, with an IP68 ingress protection.

The ShieldGLAND is also supplied with a special earth spring with earth wire, which enables significant time savings on installation, in comparison to standard earth tags, whilst giving good earthing.



IP68
Protection



Plastic
Gland




Suitable for
Armoured



No Shroud
Required



Suitable
for SY/CY




M20S, M20L,
M25 & M32



The Insert



The ShieldGLAND's **Unique adaptable insert** allows a wider range of cable acceptance due to its two part sealing gasket. Simply leave as is or remove inner sealing insert depending on your cable requirement.

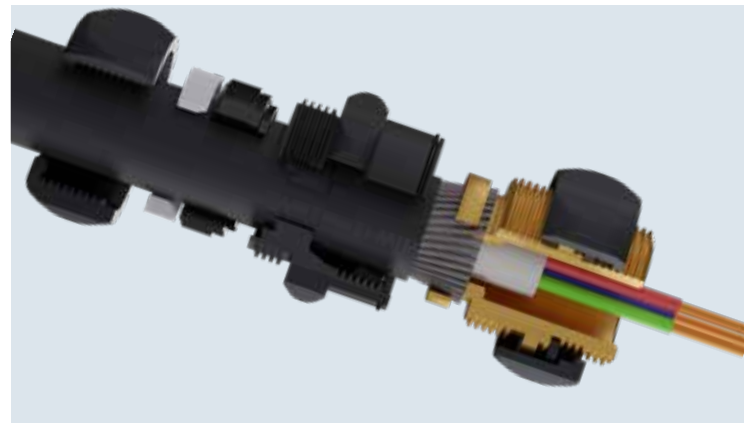

Flexible Design to Suit Your Needs.

Thanks to its flexible design the ShieldGLAND can be used with armoured, SY, CY and un-armoured cables.

The ShieldGLAND's versatile clamping olive can simply be switched to take either armoured or SY, CY making installation quick and easy.

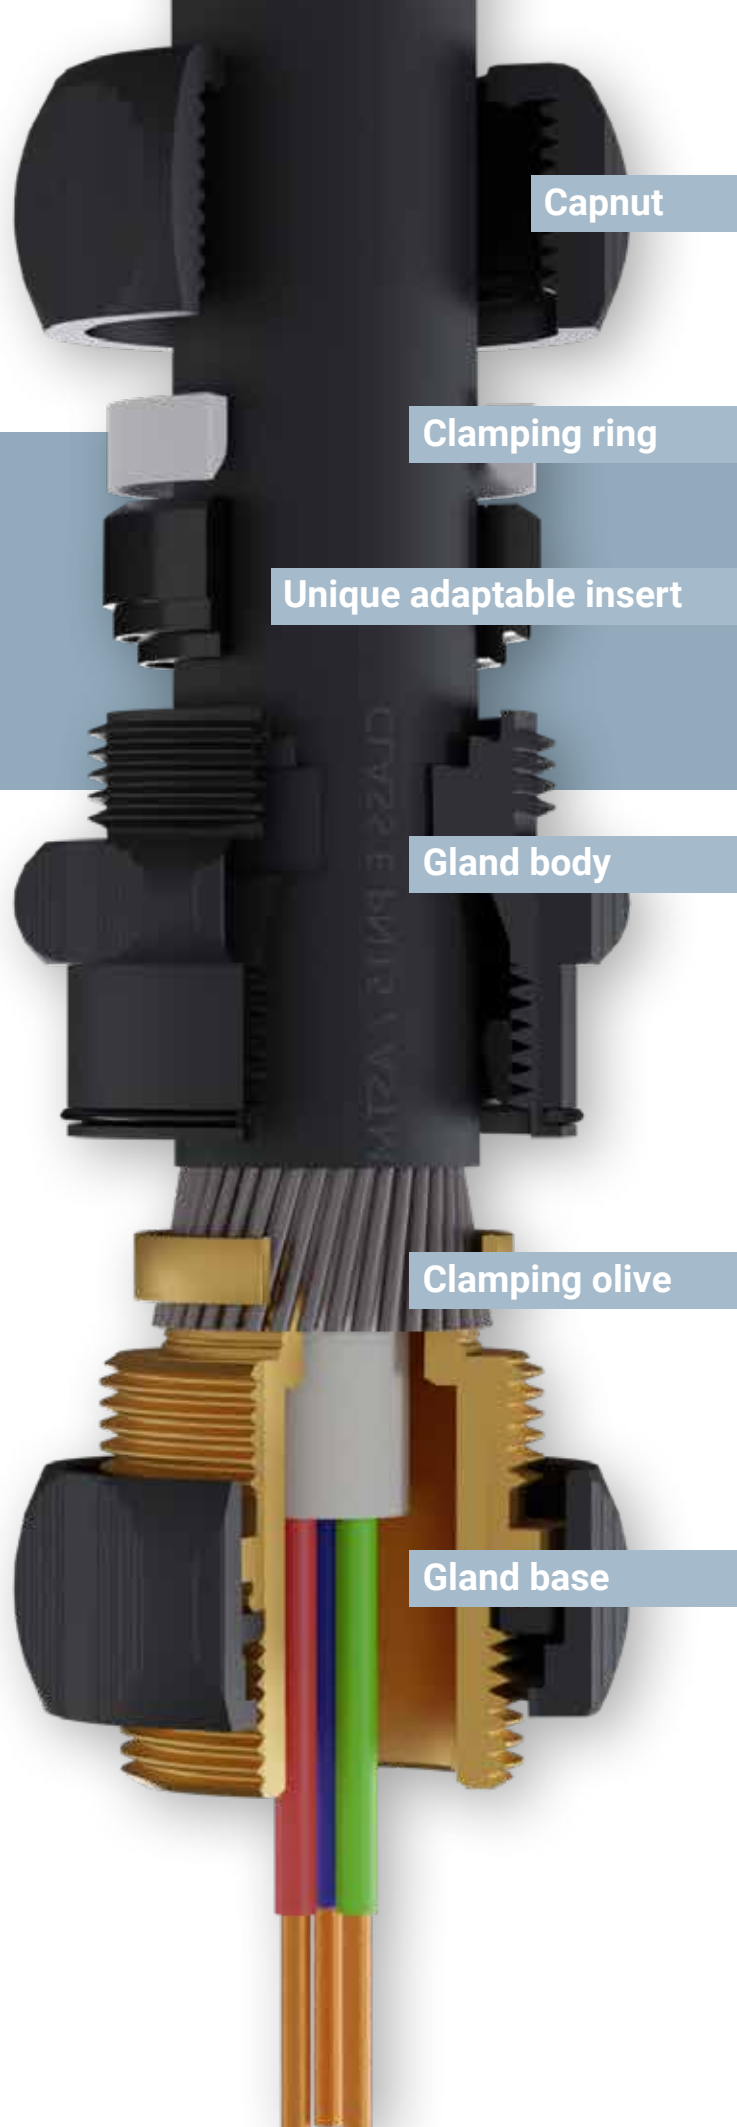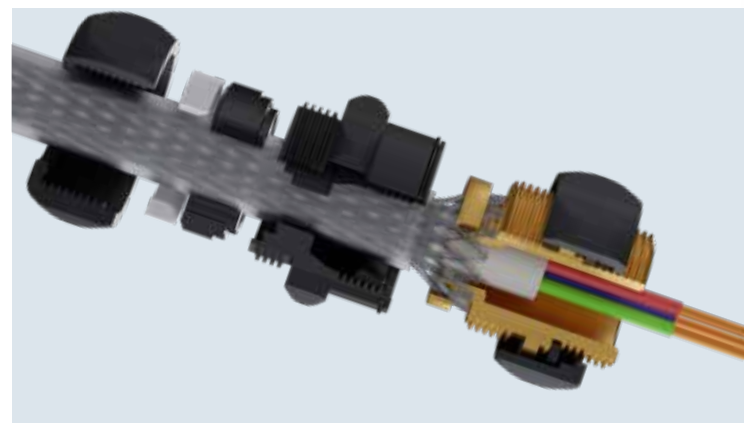

Capnut

Clamping ring

Unique adaptable insert

Gland body


Clamping olive

Gland base

CABLE GLANDS - PLASTIC

Cable Glands - Plastic SPRINT - Gland packs, GLP

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -40°C - 100°C, Gasket EPDM, EMUG locknut




ESKV Cable Gland Packs

Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
GLP M12		99719	M12	3 - 7	10
GLP M16		99716	M16	4.5 - 10	10
GLP M16 Plus RDE		99722	M16	4.5 - 10	10
GLP M20 Plus		10100613	M20	6.2 - 14	10
GLP M20 Plus RDE		10100635	M20+	4 - 14	10
GLP M25		99704	M25	9 - 17	10
GLP M25 Plus		10111148	M25+	13 - 17.5	10
GLP M25 RDE		99723	M25	7 - 17	10
GLP M32		99708	M32	13 - 21	10
GLP M32		10112381	M32	13 - 21	1
GLP M32 Plus		10111080	M32+	19 - 25	10
GLP M32 RDE		99724	M32	9 - 21	10
GLP M40		99710	M40	16 - 28	5
GLP M40		10112384	M40	16 - 28	1
GLP M40 Plus		10111150	M40+	21 - 33	5
GLP M50		99712	M50	21 - 35	5
GLP M50		10112386	M50	21 - 35	1
GLP M50 Plus		10111152	M50+	32 - 39	5
GLP M63		99714	M63	34 - 48	5
GLP M63		10112388	M63	34 - 48	1
GLP M12		99718	M12	3 - 7	10
GLP M16		99717	M16	4.5 - 10	10
GLP M20 Plus		10100612	M20	6.2 - 14	10
GLP M20 Plus RDE		10100636	M20+	4 - 14	10
GLP M25		99705	M25	9 - 17	10
GLP M25 Plus		10111149	M25+	13 - 17.5	10
GLP M32		99709	M32	13 - 21	10
GLP M32		10112382	M32	13 - 21	1
GLP M32 Plus		10111081	M32+	19 - 25	10
GLP M40		99711	M40	16 - 28	5
GLP M40		10112383	M40	16 - 28	1
GLP M40 Plus		10111151	M40+	21 - 33	5
GLP M50		99713	M50	21 - 35	5
GLP M50		10112385	M50	21 - 35	1
GLP M50 Plus		10111153	M50+	32 - 39	5
GLP M63		99715	M63	34 - 48	5
GLP M63		10112387	M63	34 - 48	1
GLP M20 Plus		10100611	M20	6.2 - 14	10
GLP M20 Plus RDE		10100637	M20+	4 - 14	10
GLP M25		99706	M20+	9 - 17	10
GLP M20 Plus		10100614	M20	6.2 - 14	10
GLP M20 Plus RDE		10100638	M20+	4 - 14	10
GLP M25		99707	M25	9 - 17	10

Cable Glands - Plastic SPRINT - ESKV

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -40°C - 100°C, Gasket EPDM.



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKV 12		10066410	M12	3 - 7	50
ESKV 16		10066411	M16	4.5 - 10	50
ESKV 20		10066412	M20	6 - 13	50
ESKV 20 Plus		10100824	M20+	6.2 - 14	100
ESKV 25		10066413	M25	9 - 17	50
ESKV 25 Plus		10110695	M25+	13 - 17.5	50
ESKV 32		10066414	M32	13 - 21	25

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKV 32 Plus		10110698	M32+	19 - 25	25
ESKV 40		10066415	M40	16 - 28	10
ESKV 40 Plus		10110701	M40+	21 - 33	10
ESKV 50		10066416	M50	21 - 35	4
ESKV 50 Plus		10110704	M50+	32 - 39	4
ESKV 63		10066417	M63	34 - 48	3
ESKV 12		10066120	M12	3 - 7	50
ESKV 16		10066121	M16	4.5 - 10	50
ESKV 20		10066122	M20	6 - 13	50
ESKV 20 Plus		10100825	M20+	6.2 - 14	100
ESKV 25		10066123	M25	9 - 17	50
ESKV 25 Plus		10110697	M25+	13 - 17.5	50
ESKV 32		10066124	M32	13 - 21	25
ESKV 32 Plus		10110700	M32+	19 - 25	25
ESKV 40		10066125	M40	16 - 28	10
ESKV 40 Plus		10110703	M40+	21 - 33	10
ESKV 50		10066126	M50	21 - 35	4
ESKV 50 Plus		10110706	M50+	32 - 39	4
ESKV 63		10066127	M63	34 - 48	3
ESKV 12		10066380	M12	3 - 7	50
ESKV 16		10066381	M16	4.5 - 10	50
ESKV 20		10066382	M20	6 - 13	50
ESKV 20 Plus		10061865	M20+	6.2 - 14	100
ESKV 25		10066383	M25	9 - 17	50
ESKV 25 Plus		10110696	M25+	13 - 17.5	50
ESKV 32		10066384	M32	13 - 21	25
ESKV 32 Plus		10110699	M32+	19 - 25	25
ESKV 40		10066385	M40	16 - 28	10
ESKV 40 Plus		10110702	M40+	21 - 33	10
ESKV 50		10066386	M50	21 - 35	4
ESKV 50 Plus		10110705	M50+	32 - 39	4
ESKV 63		10066387	M63	34 - 48	3
ESKV 20 Plus		10100610	M20+	6.2 - 14	100
ESKV 25		10102748	M25	9 - 17	50
ESKV 20 Plus		10100609	M20+	6.2 - 14	100
ESKV 25		10060456	M25	9 - 17	50

Cable Glands - Plastic SPRINT - Long thread, ESKV-L

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -40°C - 100°C, Gasket EPDM.



Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
ESKV-L 12		10066390	M12	15	3 - 7	50
ESKV-L 16		10066391	M16	15	4.5 - 10	50
ESKV-L 20		10066392	M20	15	6 - 13	50
ESKV-L 25		10066393	M25	15	9 - 17	50
ESKV-L 32		10066394	M32	15	13 - 21	25
ESKV-L 40		10066395	M40	18	16 - 28	10
ESKV-L 50		10066396	M50	18	21 - 35	10
ESKV-L 63		10066397	M63	18	34 - 48	10
ESKV-L 12		10066500	M12	15	3 - 7	50
ESKV-L 16		10066501	M16	15	4.5 - 10	50
ESKV-L 20		10066502	M20	15	6 - 13	50
ESKV-L 25		10066503	M25	15	9 - 17	50
ESKV-L 32		10066504	M32	15	13 - 21	25
ESKV-L 40		10066505	M40	18	16 - 28	10
ESKV-L 50		10066506	M50	18	21 - 35	10
ESKV-L 63		10066507	M63	18	34 - 48	10
ESKV-L 12		10066516	M12	15	3 - 7	50
ESKV-L 16		10066517	M16	15	4.5 - 10	50
ESKV-L 20		10066518	M20	15	6 - 13	50
ESKV-L 25		10066519	M25	15	9 - 17	50
ESKV-L 32		10066520	M32	15	13 - 21	25
ESKV-L 40		10066521	M40	18	16 - 28	10
ESKV-L 50		10066522	M50	18	21 - 35	10
ESKV-L 63		10066523	M63	18	34 - 48	10

**Cable Glands - Plastic
SPRINT - LowTemp, ESKV LT**

IP68 (5 bar 30 min) / IP69, Polyamide gland, Gasket silicone, glow wire test 750°C, temperature range: -60°C - 100°C



ESKV LT

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
ESKV 12 LT		10062763	M12	15	3 - 7	50
ESKV 16 LT		10062777	M16	15	4.5 - 10	50
ESKV 20 LT		10062778	M20	15	6 - 13	50
ESKV 25 LT		10062779	M25	15	9 - 17	50
ESKV 32 LT		10062780	M32	15	13 - 21	25
ESKV 40 LT		10062781	M40	18	16 - 28	10
ESKV 50 LT		10062782	M50	18	21 - 35	4
ESKV 63 LT		10062800	M63	18	34 - 48	3
ESKV 12 LT		10061490	M12	15	3 - 7	50
ESKV 16 LT		10061499	M16	15	4.5 - 10	50
ESKV 20 LT		10061509	M20	15	6 - 13	50
ESKV 25 LT		10061518	M25	15	9 - 17	50
ESKV 32 LT		10061799	M32	15	13 - 21	25
ESKV 40 LT		10061853	M40	18	16 - 28	10
ESKV 50 LT		10061866	M50	18	21 - 35	4
ESKV 63 LT		10061911	M63	18	34 - 48	3
ESKV 12 LT		10061917	M12	15	3 - 7	50
ESKV 16 LT		10061957	M16	15	4.5 - 10	50
ESKV 20 LT		10061121	M20	15	6 - 13	50
ESKV 25 LT		10061463	M25	15	9 - 17	50
ESKV 32 LT		10061491	M32	15	13 - 21	25
ESKV 40 LT		10061500	M40	18	16 - 28	10
ESKV 50 LT		10061510	M50	18	21 - 35	4
ESKV 63 LT		10061644	M63	18	34 - 48	3

**Cable Glands - Plastic
SPRINT - Long thread, LowTemp, ESKV-L LT**

IP68 (5 bar 30 min) / IP69, Polyamide gland, Gasket silicone, glow wire test 750°C, temperature range: -60°C - 100°C



ESKV-L

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
ESKV-L 12 LT		10062737	M12	15	3 - 7	50
ESKV-L 16 LT		10062738	M16	15	4.5 - 10	50
ESKV-L 20 LT		10062739	M20	15	6 - 13	50
ESKV-L 25 LT		10062758	M25	15	9 - 17	50
ESKV-L 32 LT		10062759	M32	15	13 - 21	25
ESKV-L 40 LT		10062760	M40	18	16 - 28	10
ESKV-L 50 LT		10062761	M50	18	21 - 35	10
ESKV-L 63 LT		10062762	M63	18	34 - 48	10
ESKV-L 12 LT		10061690	M12	15	3 - 7	50
ESKV-L 16 LT		10061855	M16	15	4.5 - 10	50
ESKV-L 20 LT		10061868	M20	15	6 - 13	50
ESKV-L 25 LT		10061907	M25	15	9 - 17	50
ESKV-L 32 LT		10061919	M32	15	13 - 21	25
ESKV-L 40 LT		10061950	M40	18	16 - 28	10
ESKV-L 50 LT		10061493	M50	18	21 - 35	10
ESKV-L 63 LT		10061502	M63	18	34 - 48	10
ESKV-L 12 LT		10061512	M12	15	3 - 7	50
ESKV-L 16 LT		10061691	M16	15	4.5 - 10	50
ESKV-L 20 LT		10061860	M20	15	6 - 13	50

Continued...

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
ESKV-L 25 LT		10061869	M25	15	9 - 17	50
ESKV-L 32 LT		10061908	M32	15	13 - 21	25
ESKV-L 40 LT		10061951	M40	18	16 - 28	10
ESKV-L 50 LT		10061494	M50	18	21 - 35	10
ESKV-L 63 LT		10061504	M63	18	34 - 48	10

**Cable Glands - Plastic
SPRINT - with reduction sealing insert, ESKV-RDE**

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C temperature range -40°C - 100°C, Gasket EPDM.



ESKV-RDE

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKV-RDE 12		10064976	M12	1 - 7	
ESKV-RDE 16		10064977	M16	2 - 10	
ESKV-RDE 20		10064978	M20	4 - 13	
ESKV-RDE 25		10064979	M25	7 - 17	
ESKV-RDE 32		10064980	M32	9 - 21	
ESKV-RDE 40		10064981	M40	12 - 28	
ESKV-RDE 50		10064982	M50	16 - 35	
ESKV-RDE 63		10064983	M63	28 - 48	
ESKV-RDE 12		10064992	M12	1 - 7	
ESKV-RDE 16		10064993	M16	2 - 10	
ESKV-RDE 20		10064994	M20	4 - 13	
ESKV-RDE 25		10064995	M25	7 - 17	
ESKV-RDE 32		10064996	M32	9 - 21	
ESKV-RDE 40		10064997	M40	12 - 28	
ESKV-RDE 50		10064998	M50	16 - 35	
ESKV-RDE 63		10064999	M63	28 - 48	
ESKV-RDE 12		10064984	M12	1 - 7	
ESKV-RDE 16		10064985	M16	2 - 10	
ESKV-RDE 20		10064986	M20	4 - 13	
ESKV-RDE 25		10064987	M25	7 - 17	
ESKV-RDE 32		10064988	M32	9 - 21	
ESKV-RDE 40		10064989	M40	12 - 28	
ESKV-RDE 50		10064990	M50	16 - 35	
ESKV-RDE 63		10064991	M63	28 - 48	

**Cable Glands - Plastic
SPRINT - Flame-retardant, ESKV-F**

IP68 (5 bar 30 min) / IP69, Polyamide gland, Gasket EPDM, temperature range -40°C - 100°C, glow wire test 960°C, flame-retardant EN 62444




ESKV-F

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKV-F 12		10064626	M12	3 - 7	50
ESKV-F 16		10064627	M16	4.5 - 10	50
ESKV-F 20		10064628	M20	6 - 13	50
ESKV-F 25		10064629	M25	9 - 17	50
ESKV-F 32		10064630	M32	13 - 21	25
ESKV-F 40		10064631	M40	16 - 28	10
ESKV-F 50		10064632	M50	21 - 35	4
ESKV-F 63		10064633	M63	34 - 48	3

**Cable Glands - Plastic
SPRINT - NPT, NSKV**

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -40°C - 100°C, Gasket EPDM.




NSKV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
NSKV 1/4		10062655	NPT 1/4"	3 - 7	50
NSKV 3/8		10062656	NPT 3/8"	4.5 - 10	50
NSKV 1/2		10062657	NPT 1/2"	6 - 13	50
NSKV 3/4		10062658	NPT 3/4"	9 - 17	50
NSKV 1		10062659	NPT 1"	13 - 21	25
NSKV 1 1/4		10062731	NPT 1 1/4"	16 - 28	10
NSKV 1 1/2		10062732	NPT 1 1/2"	21 - 35	4
NSKV 2		10062736	NPT 2"	34 - 48	3
NSKV 1/4		10061854	NPT 1/4"	3 - 7	50
NSKV 3/8		10061867	NPT 3/8"	4.5 - 10	50
NSKV 1/2		10061906	NPT 1/2"	6 - 13	50
NSKV 3/4		10061918	NPT 3/4"	9 - 17	50
NSKV 1		10061041	NPT 1"	13 - 21	25
NSKV 1 1/4		10061492	NPT 1 1/4"	16 - 28	10
NSKV 1 1/2		10061501	NPT 1 1/2"	21 - 35	4
NSKV 2		10061511	NPT 2"	34 - 48	3

**Cable Glands - Plastic
SPRINT - NPT with reduction insert, NSKV-RDE**

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -40°C - 100°C, Gasket EPDM.




NSKV-RDE

Type	Colour	Code	Size	Clamping Range (mm)	Qty
NSKV-RDE 1/4		10102679	NPT 1/4"	1 - 7	50
NSKV-RDE 3/8		10102680	NPT 3/8"	2 - 10	50
NSKV-RDE 1/2		10102681	NPT 1/2"	4 - 13	50
NSKV-RDE 3/4		10102682	NPT 3/4"	7 - 17	50
NSKV-RDE 1/4		10101982	NPT 1/4"	1 - 7	50
NSKV-RDE 3/8		10101983	NPT 3/8"	2 - 10	50
NSKV-RDE 1/2		10101984	NPT 1/2"	4 - 13	50
NSKV-RDE 3/4		10101985	NPT 3/4"	7 - 17	50
NSKV-RDE 1		10101986	NPT 1"	9 - 21	25
NSKV-RDE 1 1/4		10101990	NPT 1 1/4"	12 - 28	10
NSKV-RDE 1 1/2		10101991	NPT 1 1/2"	16 - 35	4
NSKV-RDE 2		10101992	NPT 2"	28 - 48	3

**Cable Glands - Plastic
SPRINT - NPT LowTemp, NSKV LT**

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -60°C - 100°C, Gasket Silicone.



NSKV LT

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
NSKV 1/4 LT		10061513	NPT 1/4"	3 - 7	50
NSKV 3/8 LT		10061694	NPT 3/8"	4.5 - 10	50
NSKV 1/2 LT		10061861	NPT 1/2"	6 - 13	50
NSKV 3/4 LT		10061870	NPT 3/4"	9 - 17	50
NSKV 1 LT		10061909	NPT 1"	13 - 21	25
NSKV 1 1/4 LT		10061952	NPT 1 1/4"	16 - 28	10
NSKV 1 1/2 LT		10061972	NPT 1 1/2"	21 - 35	4
NSKV 2 LT		10061435	NPT 2"	34 - 48	3
NSKV 1/4 LT		10061495	NPT 1/4"	3 - 7	50
NSKV 3/8 LT		10061505	NPT 3/8"	4.5 - 10	50
NSKV 1/2 LT		10061514	NPT 1/2"	6 - 13	50
NSKV 3/4 LT		10061745	NPT 3/4"	9 - 17	50
NSKV 1 LT		10061862	NPT 1"	13 - 21	25
NSKV 1 1/4 LT		10061910	NPT 1 1/4"	16 - 28	10
NSKV 1 1/2 LT		10061953	NPT 1 1/2"	21 - 35	4
NSKV 2 LT		10061496	NPT 2"	34 - 48	3

**Cable Glands - Plastic
SPRINT - with Bend Protection, ESKVS**

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -40°C - 100°C, Gasket EPDM.




ESKVS

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKVS 12		10060757	M12	3 - 7	100
ESKVS 16		10060758	M16	4.5 - 10	100
ESKVS 20		10060759	M20	6 - 13	50
ESKVS 25		10060760	M25	9 - 17	25
ESKVS 32		10060761	M32	13 - 21	10
ESKVS 12		10061276	M12	3 - 7	100
ESKVS 16		10061277	M16	4.5 - 10	100
ESKVS 20		10061278	M20	6 - 13	50
ESKVS 25		10061279	M25	9 - 17	25
ESKVS 32		10061283	M32	13 - 21	10

**Cable Glands - Plastic
SPRINT - Long Thread with Bend Protection, ESKVS-L**

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C
temperature range -40°C - 100°C, Gasket EPDM.



ESKVS-L

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
ESKVS-L 12		10061210	M12	15	3 - 7	100
ESKVS-L 16		10061211	M16	15	4.5 - 10	100
ESKVS-L 20		10061212	M20	15	6 - 13	50
ESKVS-L 25		10061213	M25	15	9 - 17	25
ESKVS-L 32		10061214	M32	15	13 - 21	10
ESKVS-L 12		10061215	M12	15	3 - 7	100
ESKVS-L 16		10061216	M16	15	4.5 - 10	100
ESKVS-L 20		10061217	M20	15	6 - 13	50
ESKVS-L 25		10061219	M25	15	9 - 17	25
ESKVS-L 32		10061220	M32	15	13 - 21	10

Cable Glands - Plastic

SPRINT - PG with Bend Protection, SKVS

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C temperature range -20°C - 80°C, Gasket EPDM.




SKVS

Type	Colour	Code	Size	Clamping Range (mm)	Qty
SKVS 7		10060615	PG 7	3 - 6.5	100
SKVS 9		10060616	PG 9	4 - 8	100
SKVS 11		10060617	PG 11	5 - 10	50
SKVS 13.5		10060618	PG 13.5	6 - 12	25
SKVS 16		10060619	PG 16	10 - 14	25
SKVS 21		10060620	PG 21	13 - 18	10
SKVS 7		10061871	PG 7	3 - 6.5	100
SKVS 9		10061872	PG 9	4 - 8	100
SKVS 11		10061873	PG 11	5 - 10	50
SKVS 13.5		10061874	PG 13.5	6 - 12	25
SKVS 16		10061875	PG 16	10 - 14	25
SKVS 21		10061876	PG 21	13 - 18	10

Cable Glands - Plastic

SPRINT - with External Strain Relief, ESKVZ

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C temperature range -40°C - 100°C, Gasket EPDM.




ESKVZ

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKVZ 12		10060722	M12	3 - 7	100
ESKVZ 16		10060723	M16	4.5 - 10	100
ESKVZ 20		10060724	M20	6 - 13	50
ESKVZ 25		10060725	M25	9 - 17	25
ESKVZ 32		10060727	M32	13 - 21	10
ESKVZ 12		10061475	M12	3 - 7	100
ESKVZ 16		10061476	M16	4.5 - 10	100
ESKVZ 20		10061477	M20	6 - 13	50
ESKVZ 25		10061478	M25	9 - 17	25
ESKVZ 32		10061479	M32	13 - 21	10

Cable Glands - Plastic

SPRINT - Long Thread with External Strain Relief, ESKVZ-L

IP68 (5 bar 30 min) / IP69, Polyamide gland, glow wire test 750°C temperature range -40°C - 100°C, Gasket EPDM.



ESKVZ-L

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
ESKVZ-L 12		10061465	M12	15	3 - 7	100
ESKVZ-L 16		10061466	M16	15	4.5 - 10	100

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
ESKVZ-L 20		10061467	M20	15	6 - 13	50
ESKVZ-L 25		10061468	M25	15	9 - 17	25
ESKVZ-L 32		10061469	M32	15	13 - 21	10
ESKVZ-L 12		10061470	M12	15	3 - 7	100
ESKVZ-L 16		10061471	M16	15	4.5 - 10	100
ESKVZ-L 20		10061472	M20	15	6 - 13	50
ESKVZ-L 25		10061473	M25	15	9 - 17	25
ESKVZ-L 32		10061474	M32	15	13 - 21	10

Cable Glands - Plastic

PG with Strain Relief, SKV

IP68 (5 bar 30 min), Polyamide gland, glow wire test 750°C temperature range -40°C - 100°C, Gasket EPDM.



SKV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
SKV 7		10066400	PG 7	3 - 6	50
SKV 9		10066401	PG 9	4 - 8	50
SKV 11		10066402	PG 11	5 - 10	50
SKV 13.5		10066403	PG 13.5	6 - 12	50
SKV 16		10066404	PG 16	8 - 14	50
SKV 21		10066405	PG 21	10 - 18	25
SKV 29		10066406	PG 29	16 - 25	20
SKV 36		10066407	PG 36	22 - 32	10
SKV 42		10066408	PG 42	28 - 38	5
SKV 48		10066409	PG 48	36 - 44	4
SKV 7		10066191	PG 7	3 - 6	50
SKV 9		10066192	PG 9	4 - 8	50
SKV 11		10066193	PG 11	5 - 10	50
SKV 13.5		10066194	PG 13.5	6 - 12	50
SKV 16		10066195	PG 16	8 - 14	50
SKV 21		10066196	PG 21	10 - 18	25
SKV 29		10066197	PG 29	16 - 25	20
SKV 36		10066198	PG 36	22 - 32	10
SKV 42		10066199	PG 42	28 - 38	5
SKV 48		10066200	PG 48	36 - 44	4
SKV 7		10066001	PG 7	3 - 6	50
SKV 9		10066002	PG 9	4 - 8	50
SKV 11		10066003	PG 11	5 - 10	50
SKV 13.5		10066004	PG 13.5	6 - 12	50
SKV 16		10066005	PG 16	8 - 14	50
SKV 21		10066006	PG 21	10 - 18	25
SKV 29		10066007	PG 29	16 - 25	20
SKV 36		10066008	PG 36	22 - 32	10
SKV 42		10066009	PG 42	28 - 38	5
SKV 48		10101793	PG 48	36 - 44	4

CABLE GLANDS - PUSH-IN

Cable Glands - Push

SPRINT - ESKV-P

IP68, Polyamide gland, glow wire test 750°C, temperature range -40°C - 100°C, Gasket EPDM, Gasket TPE



ESKV-P



Type	Colour	Code	Size	Clamping Range (mm)
ESKV-P 25		10111963	M25	9 - 17
ESKV-P 25		10112062	M25	9 - 17



ESKVS-P - with Bend Protection

Type	Colour	Code	Size	Clamping Range (mm)
ESKVS-P 25		10112063	M25	9 - 17
ESKVS-P 25		10112064	M25	9 - 17



ESKVZ-P - with External Strain Relief

Type	Colour	Code	Size	Clamping Range (mm)
ESKVZ-P 25		10112065	M25	9 - 17
ESKVZ-P 25		10112066	M25	9 - 17

CABLE GLANDS - BRASS

Cable Glands - Brass SPRINT - Gland Packs, EMSKV

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C - 100°C, EMMU locknut.



EMSKV Gland Pack

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV-SET 12	Brass	10065032	M12	3 - 7	50
EMSKV-SET 16	Brass	10065033	M16	4.5 - 10	50
EMSKV-SET 20	Brass	10065034	M20	6 - 13	50
EMSKV-SET 25	Brass	10065035	M25	9 - 17	50
EMSKV-SET 32	Brass	10065036	M32	13 - 21	25
EMSKV-SET 40	Brass	10065037	M40	16 - 28	10
EMSKV-SET 50	Brass	10065038	M50	21 - 35	10
EMSKV-SET 63	Brass	10065039	M63	34 - 48	10

Cable Glands - Brass SPRINT - EMSKV

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C - 100°C.



EMSKV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12	Brass	10065000	M12	3 - 7	50
EMSKV 16	Brass	10065001	M16	4.5 - 10	50
EMSKV 16 PLUS	Brass	10106372	M16+	6 - 11	50
EMSKV 20	Brass	10065002	M20	6 - 13	50
EMSKV 25	Brass	10065003	M25	9 - 17	50
EMSKV 25 PLUS	Brass	10103053	M25+	13 - 18	50
EMSKV 32	Brass	10065004	M32	13 - 21	25
EMSKV 40	Brass	10065005	M40	16 - 28	10
EMSKV 50	Brass	10065006	M50	21 - 35	10
EMSKV 63	Brass	10065007	M63	34 - 48	10
EMSKV 75	Brass	10100865	M75	48 - 62	1



Cable Glands - Brass SPRINT - Long Thread, EMSKV-L

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C - 100°C.




EMSKV-L

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
EMSKV-L 12	Brass	10065008	M12	12	3 - 7	50
EMSKV-L 16	Brass	10065009	M16	12	4.5 - 10	50
EMSKV-L 20	Brass	10065010	M20	12	6 - 13	50
EMSKV-L 25	Brass	10065011	M25	12	9 - 17	50
EMSKV-L 32	Brass	10065012	M32	15	13 - 21	25
EMSKV-L 40	Brass	10065013	M40	15	16 - 28	10
EMSKV-L 50	Brass	10065014	M50	15	21 - 35	10
EMSKV-L 63	Brass	10065015	M63	15	34 - 48	10

Cable Glands - Brass SPRINT - LowTemp, EMSKV LT

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket silicone, temperature range -60°C - 100°C.



EMSKV LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 LT	Brass	10065800	M12	3 - 7	50
EMSKV 16 LT	Brass	10065801	M16	4.5 - 10	50
EMSKV 20 LT	Brass	10065802	M20	6 - 13	50
EMSKV 25 LT	Brass	10065803	M25	9 - 17	50
EMSKV 32 LT	Brass	10065804	M32	13 - 21	25
EMSKV 40 LT	Brass	10065805	M40	16 - 28	10
EMSKV 50 LT	Brass	10065806	M50	21 - 35	10
EMSKV 63 LT	Brass	10065807	M63	34 - 48	10
EMSKV 75 LT	Brass	10109669	M75	48 - 62	1

Cable Glands - Brass SPRINT - Long Thread, LowTemp, EMSKV-L LT

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket silicone, temperature range -60°C - 100°C.



EMSKV-L LT

Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
EMSKV-L 12 LT	Brass	10065808	M12	12	3 - 7	50
EMSKV-L 16 LT	Brass	10065809	M16	12	4.5 - 10	50
EMSKV-L 20 LT	Brass	10065810	M20	12	6 - 13	50
EMSKV-L 25 LT	Brass	10065811	M25	12	9 - 17	50
EMSKV-L 32 LT	Brass	10065812	M32	15	13 - 21	25
EMSKV-L 40 LT	Brass	10065813	M40	15	16 - 28	10
EMSKV-L 50 LT	Brass	10065814	M50	15	21 - 35	10
EMSKV-L 63 LT	Brass	10065815	M63	15	34 - 48	10

Cable Glands - Brass
SPRINT - Enlarging Cable Gland, EMSKV

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C - 100°C.




EMSKV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12-16	Brass	10101750	M12	4.5 - 10	50
EMSKV 16-20	Brass	10101939	M16	6 - 13	50
EMSKV 20-25	Brass	10065255	M20	9 - 17	50
EMSKV 25-32	Brass	10065256	M25	13 - 21	25
EMSKV 32-40	Brass	10101940	M32	16 - 28	10
EMSKV 40-50	Brass	10101365	M40	21 - 35	10
EMSKV 50-63	Brass	10101941	M50	34 - 48	10
EMSKV 63-75	Brass	10101364	M63	48 - 62	1

Cable Glands - Brass
SPRINT - NPT, NMSKV

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C - 100°C.




NMSKV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
NMSKV 1/4	Brass	10065480	NPT 1/4"	3 - 7	50
NMSKV 3/8	Brass	10065481	NPT 3/8"	4.5 - 10	50
NMSKV 1/2	Brass	10065482	NPT 1/2"	6 - 13	50
NMSKV 3/4	Brass	10065483	NPT 3/4"	9 - 17	50
NMSKV 1	Brass	10065484	NPT 1"	13 - 21	25
NMSKV 1 1/4	Brass	10065485	NPT 1 1/4"	16 - 28	10
NMSKV 1 1/2	Brass	10065486	NPT 1 1/2"	21 - 35	10
NMSKV 2	Brass	10065487	NPT 2"	34 - 48	10

Cable Glands - Brass
SPRINT - PG, PMSKV

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C - 100°C.



PMSKV


Type	Colour	Code	Size	Clamping Range (mm)	Qty
PMSKV 7-12	Brass	10100677	PG 7	3 - 7	50
PMSKV 7-16	Brass	10100678	PG 7	4.5 - 10	50
PMSKV 9-16	Brass	10100490	PG 9	4.5 - 10	50

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
PMSKV 11-16	Brass	10100683	PG 11	4.5 - 10	50
PMSKV 11-20	Brass	10100684	PG 11	6 - 13	50
PMSKV 13.5-20	Brass	10100685	PG 13.5	6 - 13	50
PMSKV 13.5-25	Brass	10100491	PG 13.5	9 - 17	50
PMSKV 16-20	Brass	10100686	PG 16	6 - 13	50
PMSKV 16-25	Brass	10100687	PG 16	9 - 17	50
PMSKV 21-25	Brass	10100688	PG 21	9 - 17	50
PMSKV 21-32	Brass	10100689	PG 21	13 - 21	25
PMSKV 29-40	Brass	10100690	PG 29	16 - 28	10
PMSKV 36-50	Brass	10100691	PG 36	21 - 35	10
PMSKV 42-50	Brass	10100692	PG 42	21 - 35	10
PMSKV 48-63	Brass	10100693	PG 48	34 - 48	10

Cable Glands - Brass
SPRINT - PG, LowTemp, PMSKV LT

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket silicone, temperature range -60°C - 100°C.




PMSKV LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
PMSKV 7-12 LT	Brass	10107521	PG 7	3 - 7	50
PMSKV 7-16 LT	Brass	10107522	PG 7	4.5 - 10	50
PMSKV 9-16 LT	Brass	10107523	PG 9	4.5 - 10	50
PMSKV 11-16 LT	Brass	10107524	PG 11	4.5 - 10	50
PMSKV 11-20 LT	Brass	10107525	PG 11	6 - 13	50
PMSKV 13.5-20 LT	Brass	10107526	PG 13.5	6 - 13	50
PMSKV 13.5-25 LT	Brass	10107527	PG 13.5	9 - 17	50
PMSKV 16-20 LT	Brass	10107528	PG 16	6 - 13	50
PMSKV 16-25 LT	Brass	10107529	PG 16	9 - 17	50
PMSKV 21-25 LT	Brass	10107530	PG 21	9 - 17	50
PMSKV 21-32 LT	Brass	10107531	PG 21	13 - 21	25
PMSKV 29-40 LT	Brass	10107532	PG 29	16 - 28	10
PMSKV 36-50 LT	Brass	10107533	PG 36	21 - 35	10
PMSKV 42-50 LT	Brass	10107534	PG 42	21 - 35	10
PMSKV 48-63 LT	Brass	10107535	PG 48	34 - 48	10

Cable Glands - Brass
SPRINT - with Bend Protection, EMSKVS

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C - 100°C.



EMSKVS

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKVS 16	Brass	10065831	M16	4.5 - 10	50
EMSKVS 20	Brass	10065832	M20	6 - 13	50
EMSKVS 25	Brass	10065833	M25	9 - 17	25
EMSKVS 32	Brass	10065834	M32	13 - 21	25
EMSKVS 40	Brass	10065835	M40	16 - 28	10
EMSKVS 50	Brass	10065836	M50	21 - 35	10
EMSKVS 63	Brass	10065837	M63	34 - 48	10

Cable Glands - Brass

SPRINT - Long Thread with Bend Protection, EMSKVS-L

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C · 100°C.



EMSKVS-L

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
EMSKVS-L 16	Brass	10065851	M16	12	4.5 · 10	50
EMSKVS-L 20	Brass	10065852	M20	12	6 · 13	50
EMSKVS-L 25	Brass	10065853	M25	12	9 · 17	25
EMSKVS-L 32	Brass	10065854	M32	15	13 · 21	25
EMSKVS-L 40	Brass	10065855	M40	15	16 · 28	10
EMSKVS-L 50	Brass	10065856	M50	15	21 · 35	10
EMSKVS-L 63	Brass	10065857	M63	15	34 · 48	10

Cable Glands - Brass

SPRINT - with External Strain Relief, EMSKVZ

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C · 100°C.



EMSKVZ

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKVZ 16	Brass	10065351	M16	4.5 · 10	25
EMSKVZ 20	Brass	10065352	M20	6 · 13	25
EMSKVZ 25	Brass	10065353	M25	9 · 17	25
EMSKVZ 32	Brass	10065354	M32	13 · 21	10
EMSKVZ 40	Brass	10065355	M40	16 · 28	5
EMSKVZ 50	Brass	10065356	M50	21 · 35	5
EMSKVZ 63	Brass	10065357	M63	34 · 48	5

Cable Glands - Brass

SPRINT - Long Thread with External Strain Relief, EMSKVZ-L

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket EPDM, temperature range -40°C · 100°C.




EMSKVZ-L

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
EMSKVZ-L 16	Brass	10065860	M16	12	4.5 · 10	25
EMSKVZ-L 20	Brass	10065861	M20	12	6 · 13	25
EMSKVZ-L 25	Brass	10065862	M25	12	9 · 17	25
EMSKVZ-L 32	Brass	10065863	M32	15	13 · 21	10
EMSKVZ-L 40	Brass	10065864	M40	15	16 · 28	5
EMSKVZ-L 50	Brass	10065865	M50	15	21 · 35	5
EMSKVZ-L 63	Brass	10065866	M63	15	34 · 48	5

Cable Glands - Brass

PG, MSKV

IP68 (5 bar 30 min) / IP69, Brass nickel-plated gland, polyamide clamping cage, gasket TPV, temperature range -40°C · 100°C.



MSKV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
MSKV 7	Brass	10062281	PG 7	3 · 6.5	50
MSKV 9	Brass	10062282	PG 9	4 · 8	50
MSKV 11	Brass	10062283	PG 11	5 · 10	50
MSKV 13,5	Brass	10062284	PG 13.5	6 · 12	50
MSKV 16	Brass	10062285	PG 16	10 · 14	50
MSKV 21	Brass	10062286	PG 21	13 · 18	50
MSKV 29	Brass	10062287	PG 29	18 · 25	25
MSKV 36	Brass	10062288	PG 36	22 · 32	10
MSKV 42	Brass	10062289	PG 42	30 · 38	10
MSKV 48	Brass	10062290	PG 48	34 · 44	10

CABLE GLANDS - STAINLESS STEEL

Cable Glands - Stainless Steel

SPRINT - Stainless Steel 1.4305, ESSKV

IP68 (5 bar 30 min) / IP69, Stainless steel A2 (1.4305) gland, polyamide clamping cage, gasket EPDM, temperature range -40°C · 100°C.



ESSKV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12	Stainless Steel	10069000	M12	3 · 7	10
ESSKV 16	Stainless Steel	10069001	M16	4.5 · 10	10
ESSKV 20	Stainless Steel	10069002	M20	6 · 13	10
ESSKV 25	Stainless Steel	10069003	M25	9 · 17	10
ESSKV 32	Stainless Steel	10069004	M32	13 · 21	5
ESSKV 40	Stainless Steel	10069005	M40	16 · 28	5
ESSKV 50	Stainless Steel	10069006	M50	21 · 35	2
ESSKV 63	Stainless Steel	10069007	M63	34 · 48	1

Cable Glands - Stainless Steel

SPRINT - Stainless Steel 1.4404, ESSKV-4

IP68 (5 bar 30 min) / IP69, Stainless steel A4 (1.4404) gland, polyamide clamping cage, gasket EPDM, temperature range -40°C · 100°C.



ESSKV-4

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV-4 12	Stainless Steel	10069100	M12	3 · 7	10


Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV-4 16	Stainless Steel	10069101	M16	4.5 - 10	10
ESSKV-4 20	Stainless Steel	10069102	M20	6 - 13	10
ESSKV-4 25	Stainless Steel	10069103	M25	9 - 17	10
ESSKV-4 32	Stainless Steel	10069104	M32	13 - 21	5
ESSKV-4 40	Stainless Steel	10069105	M40	16 - 28	5
ESSKV-4 50	Stainless Steel	10069106	M50	21 - 35	2
ESSKV-4 63	Stainless Steel	10069107	M63	34 - 48	1

Cable Glands - Stainless Steel

SPRINT - LowTemp Stainless Steel 1.4305, ESSKV LT

IP68 (5 bar 30 min) / IP69, Stainless steel A2 (1.4305) gland, polyamide clamping cage, gasket silicone, temperature range -60°C - 100°C.



ESSKV LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 LT	Stainless Steel	10065962	M12	3 - 7	10
ESSKV 16 LT	Stainless Steel	10065963	M16	4.5 - 10	10
ESSKV 20 LT	Stainless Steel	10065964	M20	6 - 13	10
ESSKV 25 LT	Stainless Steel	10065965	M25	9 - 17	10
ESSKV 32 LT	Stainless Steel	10065966	M32	13 - 21	5
ESSKV 40 LT	Stainless Steel	10065967	M40	16 - 28	5
ESSKV 50 LT	Stainless Steel	10065968	M50	21 - 35	2
ESSKV 63 LT	Stainless Steel	10065969	M63	34 - 48	1

Cable Glands - Stainless Steel

SPRINT - LowTemp Stainless Steel 1.4404, ESSKV-4 LT

IP68 (5 bar 30 min) / IP69, Stainless steel A4 (1.4404) gland, polyamide clamping cage, gasket silicone, temperature range -60°C - 100°C.




ESSKV LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV-4 12 LT	Stainless Steel	10065881	M12	3 - 7	10
ESSKV-4 16 LT	Stainless Steel	10065882	M16	4.5 - 10	10
ESSKV-4 20 LT	Stainless Steel	10065883	M20	6 - 13	10
ESSKV-4 25 LT	Stainless Steel	10065884	M25	9 - 17	10
ESSKV-4 32 LT	Stainless Steel	10065885	M32	13 - 21	5
ESSKV-4 40 LT	Stainless Steel	10065886	M40	16 - 28	5
ESSKV-4 50 LT	Stainless Steel	10065887	M50	21 - 35	2
ESSKV-4 63 LT	Stainless Steel	10065888	M63	34 - 48	1

Cable Glands - Stainless Steel

Hygienic Design, HatGLAND, HGSM

IP68 (5 bar 30 min) / IP69, Stainless steel A2 (1.4305) gland, gasket EPDM, temperature range -40°C - 120°C, includes sealing rings and locknut.




HGSM

Type	Colour	Code	Size	Clamping Range (mm)	Qty
HGSM 12-E pack	Stainless Steel	10101853	M12	2 - 5	1
HGSM 16-E pack	Stainless Steel	10101854	M16	2 - 9	1
HGSM 20-E pack	Stainless Steel	10101855	M20	3 - 12	1
HGSM 25-E pack	Stainless Steel	10101856	M25	4 - 16	1
HGSM 32-E pack	Stainless Steel	10101857	M32	9 - 23	1
HGSM 40-E pack	Stainless Steel	10101858	M40	16 - 29	1
HGSM 50-E pack	Stainless Steel	10101859	M50	26 - 38	1
HGSM 63-E pack	Stainless Steel	10101860	M63	32 - 49	1

Cable Glands - Stainless Steel

Hygienic Design, HatGLAND, Food, HGSM FD

IP68 (5 bar 30 min) / IP69, Stainless steel A2 (1.4305) gland, gasket silicone, includes sealing rings and locknut, -60 °C - 180 °C




HGSM FD

Type	Colour	Code	Size	Clamping Range (mm)	Qty
HGSM 12 FD pack	Stainless Steel	10103623	M12	2 - 5	1
HGSM 16 FD pack	Stainless Steel	10103624	M16	2 - 9	1
HGSM 20 FD pack	Stainless Steel	10103625	M20	3 - 12	1
HGSM 25 FD pack	Stainless Steel	10103626	M25	4 - 16	1
HGSM 32 FD pack	Stainless Steel	10103627	M32	9 - 23	1
HGSM 40 FD pack	Stainless Steel	10103628	M40	16 - 29	1
HGSM 50 FD pack	Stainless Steel	10103629	M50	26 - 38	1
HGSM 63 FD pack	Stainless Steel	10103630	M63	32 - 49	1

Cable Glands - Stainless Steel

Hygienic Design, HatGLAND, Low Temperature -60°C - 180°C, HGSM LT

IP68 (5 bar 30 min) / IP69, Stainless steel A2 (1.4305) gland, gasket silicone, includes sealing rings and locknut, low temperature -60 °C - 180 °C



HGSM LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
HGSM 12-LT pack	Stainless Steel	10102116	M12	2 - 5	1
HGSM 16-LT pack	Stainless Steel	10102117	M16	2 - 9	1
HGSM 20-LT pack	Stainless Steel	10102118	M20	3 - 12	1

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
HGSM 25-LT pack	Stainless Steel	10102119	M25	4 · 16	1
HGSM 32-LT pack	Stainless Steel	10102120	M32	9 · 23	1
HGSM 40-LT pack	Stainless Steel	10102121	M40	16 · 29	1
HGSM 50-LT pack	Stainless Steel	10102122	M50	26 · 38	1
HGSM 63-LT pack	Stainless Steel	10102123	M63	32 · 49	1

CABLE GLANDS - ZINC

Cable Glands - Zinc

SPRINT - Zinc, MARATHON, EZMGV-L

IP66 / IP68, gland zinc nickel-plated, clamping cage polyamide /TPE, gasket EPDM, temperature range -40°C · 80°C



EZMGV-L


Type	Colour	Code	Size	Clamping Range (mm)	Qty
EZMGV-L 20	Zinc	10108742	M20	6 · 13	50

CABLE GLANDS - EMC

Cable Glands - EMC

SPRINT - Brass, Contact Spring Insert, EN 62444, EMSKV EMV-S

IP68 (5 bar 30 min) / IP69, gland brass nickel-plated, clamping cage polyamide, gasket EPDM, contact spring insert Stainless steel 1.4310, temperature range -40°C · 100°C.



EMSKV EMV-S

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 EMV-S	Brass	10102273	M12	3 · 7	50
EMSKV 16 EMV-S	Brass	10102274	M16	4.5 · 10	50
EMSKV 20 EMV-S	Brass	10102275	M20	6 · 13	50
EMSKV 25 EMV-S	Brass	10102276	M25	9 · 17	50
EMSKV 32 EMV-S	Brass	10102277	M32	13 · 21	25
EMSKV 40 EMV-S	Brass	10102278	M40	16 · 28	10
EMSKV 50 EMV-S	Brass	10102279	M50	21 · 35	10
EMSKV 63 EMV-S	Brass	10102280	M63	34 · 48	10

Cable Glands - EMC

SPRINT - Brass, Contact Spring Insert, Long Thread EN 62444, EMSKV-L EMV-S

IP68 (5 bar 30 min) / IP69, gland brass nickel-plated, clamping cage polyamide, gasket EPDM, contact spring insert Stainless steel 1.4310, temperature range -40°C · 100°C.



EMSKV-L EMV-S

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
EMSKV-L 12 EMV-S	Brass	10102645	M12	12	3 · 7	50

Continued...

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
EMSKV-L 16 EMV-S	Brass	10102646	M16	12	4.5 · 10	50
EMSKV-L 20 EMV-S	Brass	10102647	M20	12	6 · 13	50
EMSKV-L 25 EMV-S	Brass	10102648	M25	12	9 · 17	50
EMSKV-L 32 EMV-S	Brass	10102649	M32	15	13 · 21	25
EMSKV-L 40 EMV-S	Brass	10102650	M40	15	16 · 28	10
EMSKV-L 50 EMV-S	Brass	10102651	M50	15	21 · 35	10
EMSKV-L 63 EMV-S	Brass	10102652	M63	15	34 · 48	10

Cable Glands - EMC

SPRINT - Brass, Earthing Cones DIN 89345, EN 62444, EMSKV EMV-Z IP68 (5 bar 30 min) / IP69, gland brass nickel-plated, clamping cage polyamide, gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C · 100°C.




EMSKV EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 EMV-Z	Brass	10065016	M12	3 · 7	50
EMSKV 16 EMV-Z	Brass	10065017	M16	4.5 · 10	50
EMSKV 20 EMV-Z	Brass	10065018	M20	6 · 13	50
EMSKV 25 EMV-Z	Brass	10065019	M25	9 · 17	50
EMSKV 32 EMV-Z	Brass	10065020	M32	13 · 21	25
EMSKV 40 EMV-Z	Brass	10065021	M40	16 · 28	10
EMSKV 50 EMV-Z	Brass	10065022	M50	21 · 35	10
EMSKV 63 EMV-Z	Brass	10065023	M63	34 · 48	10
EMSKV 75 EMV-Z	Brass	10100963	M75	38 · 62	1

Cable Glands - EMC

SPRINT - Brass, Earthing Cones DIN 89345, Long Thread, EN 62444, EMSKV-L EMV-Z

IP68 (5 bar 30 min) / IP69, gland brass nickel-plated, clamping cage polyamide, gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C · 100°C.



EMSKV-L EMV-Z

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
EMSKV-L 12 EMV-Z	Brass	10065182	M12	12	3 · 7	50
EMSKV-L 16 EMV-Z	Brass	10065183	M16	12	4.5 · 10	50
EMSKV-L 20 EMV-Z	Brass	10065184	M20	12	6 · 13	50
EMSKV-L 25 EMV-Z	Brass	10065185	M25	12	9 · 17	50
EMSKV-L 32 EMV-Z	Brass	10065186	M32	15	13 · 21	25
EMSKV-L 40 EMV-Z	Brass	10065187	M40	15	16 · 28	10
EMSKV-L 50 EMV-Z	Brass	10065188	M50	15	21 · 35	10
EMSKV-L 63 EMV-Z	Brass	10065189	M63	15	34 · 48	10

Cable Glands - EMC

SPRINT - Brass, LowTemp, Earthing Cones DIN 89345, EN 62444, EMSKV LT EMV-Z

IP68 (5 bar 30 min) / IP69, gland brass nickel-plated, clamping cage polyamide, gasket silicone, earthing cones Brass chromium-plated, low temperature range -60°C · 100°C



EMSKV LT EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 LT EMV-Z	Brass	10105938	M12	3 · 7	50
EMSKV 16 LT EMV-Z	Brass	10105356	M16	4.5 · 10	50

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 20 LT EMV-Z	Brass	10104931	M20	6 - 13	50
EMSKV 25 LT EMV-Z	Brass	10065819	M25	9 - 17	50
EMSKV 32 LT EMV-Z	Brass	10105138	M32	13 - 21	25
EMSKV 40 LT EMV-Z	Brass	10065821	M40	16 - 28	10
EMSKV 50 LT EMV-Z	Brass	10065822	M50	21 - 35	10
EMSKV 63 LT EMV-Z	Brass	10104932	M63	34 - 48	10


Cable Glands - EMC
SPRINT - Brass, Enlarging Glands, Earthing Cones DIN 89345, EN 62444, EMSKV EMV-Z
 IP68 (5 bar 30 min) / IP69, gland brass nickel-plated, clamping cage polyamide, gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C - 100°C.



EMSKV EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 20-25 EMV-Z	Brass	10065257	M20	9 - 17	50
EMSKV 25-32 EMV-Z	Brass	10065258	M25	13 - 21	25
EMSKV 32-40 EMV-Z	Brass	10104358	M32	16 - 28	10
EMSKV 63-75 EMV-Z	Brass	10103318	M63	48 - 63	1


Cable Glands - EMC
SPRINT - Stainless Steel A2 (1.4305), Contact Spring Insert, EN 62444, ESSKV EMV-S
 IP68 (5 bar 30 min) / IP69, Gland Stainless Steel A2 (1.4305), clamping cage Polyamide, Gasket EPDM, contact spring insert stainless steel 1.4310, temperature range -40°C - 100°C.



ESSKV EMV-S

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 EMV-S	Stainless Steel	10106111	M12	3 - 7	10
ESSKV 16 EMV-S	Stainless Steel	10104385	M16	4.5 - 10	10
ESSKV 20 EMV-S	Stainless Steel	10105085	M20	6 - 13	10
ESSKV 25 EMV-S	Stainless Steel	10106112	M25	9 - 17	10
ESSKV 32 EMV-S	Stainless Steel	10106113	M32	13 - 21	5
ESSKV 40 EMV-S	Stainless Steel	10106114	M40	16 - 28	5
ESSKV 50 EMV-S	Stainless Steel	10106098	M50	21 - 35	2
ESSKV 63 EMV-S	Stainless Steel	10106115	M63	34 - 48	1

Cable Glands - EMC
SPRINT - Stainless Steel A2 (1.4305), Earthing Cones DIN 89345, EN 62444, ESSKV EMV-Z
 IP68 (5 bar 30 min) / IP69, Gland Stainless Steel A2 (1.4305), clamping cage Polyamide, Gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C - 100°C.



ESSKV EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 EMV-Z	Stainless Steel	10069016	M12	3 - 7	10
ESSKV 16 EMV-Z	Stainless Steel	10069017	M16	4.5 - 10	10

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 20 EMV-Z	Stainless Steel	10069018	M20	6 - 13	10
ESSKV 25 EMV-Z	Stainless Steel	10069019	M25	9 - 17	10
ESSKV 32 EMV-Z	Stainless Steel	10069020	M32	13 - 21	5
ESSKV 40 EMV-Z	Stainless Steel	10069021	M40	16 - 28	5
ESSKV 50 EMV-Z	Stainless Steel	10069022	M50	21 - 35	2
ESSKV 63 EMV-Z	Stainless Steel	10069023	M63	34 - 48	1

Cable Glands - EMC
SPRINT - Stainless Steel A4 (1.4404), Earthing Cones DIN 89345, EN 62444, ESSKV-4 EMV-Z
 IP68 (5 bar 30 min) / IP69, Gland Stainless Steel A4 (1.4404), clamping cage Polyamide, Gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C - 100°C.



ESSKV-4 EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV-4 12 EMV-Z	Stainless Steel	10069116	M12	3 - 7	10
ESSKV-4 16 EMV-Z	Stainless Steel	10069117	M16	4.5 - 10	10
ESSKV-4 20 EMV-Z	Stainless Steel	10069118	M20	6 - 13	10
ESSKV-4 25 EMV-Z	Stainless Steel	10069119	M25	9 - 17	10
ESSKV-4 32 EMV-Z	Stainless Steel	10069120	M32	13 - 21	5
ESSKV-4 40 EMV-Z	Stainless Steel	10069121	M40	16 - 28	5
ESSKV-4 50 EMV-Z	Stainless Steel	10069122	M50	21 - 35	2
ESSKV-4 63 EMV-Z	Stainless Steel	10069123	M63	34 - 48	1

Cable Glands - EMC
SPRINT - Stainless Steel A2 (1.4305), LowTemp, Earthing Cones DIN 89345, EN 62444, ESSKV LT EMV-Z
 IP68 (5 bar 30 min) / IP69, Gland Stainless Steel A2 (1.4305), clamping cage Polyamide, Gasket silicone, earthing cones Brass chromium-plated, low temperature -60°C - 100°C



ESSKV LT EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 LT EMV-Z	Stainless Steel	10065954	M12	3 - 7	10
ESSKV 16 LT EMV-Z	Stainless Steel	10065955	M16	4.5 - 10	10
ESSKV 20 LT EMV-Z	Stainless Steel	10065956	M20	6 - 13	10
ESSKV 25 LT EMV-Z	Stainless Steel	10065957	M25	9 - 17	10
ESSKV 32 LT EMV-Z	Stainless Steel	10065958	M32	13 - 21	5
ESSKV 40 LT EMV-Z	Stainless Steel	10065959	M40	16 - 28	5
ESSKV 50 LT EMV-Z	Stainless Steel	10065960	M50	21 - 35	2
ESSKV 63 LT EMV-Z	Stainless Steel	10065961	M63	34 - 48	1

Cable Glands - EMC
SPRINT - Stainless Steel A4 (1.4404), LowTemp, Earthing Cones DIN 89345, EN 62444, ESSKV-4 LT EMV-Z
 IP68 (5 bar 30 min) / IP69, Gland Stainless Steel A4 (1.4404), clamping cage Polyamide, Gasket silicone, earthing cones Brass chromium-plated, low temperature -60°C - 100°C





ESSKV-4 LT EMV-Z

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV-4 12 LT EMV-Z	Stainless Steel	10065873	M12	3 - 7	10
ESSKV-4 16 LT EMV-Z	Stainless Steel	10065874	M16	4.5 - 10	10
ESSKV-4 20 LT EMV-Z	Stainless Steel	10065875	M20	6 - 13	10
ESSKV-4 25 LT EMV-Z	Stainless Steel	10065876	M25	9 - 17	10
ESSKV-4 32 LT EMV-Z	Stainless Steel	10065877	M32	13 - 21	5
ESSKV-4 40 LT EMV-Z	Stainless Steel	10065878	M40	16 - 28	5
ESSKV-4 50 LT EMV-Z	Stainless Steel	10065879	M50	21 - 35	2
ESSKV-4 63 LT EMV-Z	Stainless Steel	10065880	M63	34 - 48	1

Cable Glands - EMC

SPRINT - Brass, Earthing Cones DIN 89345, PG, PMSKV EMV-Z
IP68 (5 bar 30 min) / IP69, Gland Brass nickel-plated, clamping cage Polyamide, Gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C - 100°C.




PMSKV EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
PMSKV 7-12 EMV-Z	Brass	10100694	PG 7	3 - 7	50
PMSKV 7-16 EMV-Z	Brass	10100695	PG 7	4.5 - 10	50
PMSKV 9-16 EMV-Z	Brass	10101011	PG 9	4.5 - 10	50
PMSKV 11-16 EMV-Z	Brass	10100696	PG 11	4.5 - 10	50
PMSKV 11-20 EMV-Z	Brass	10100697	PG 11	6 - 13	50
PMSKV 13.5-20 EMV-Z	Brass	10100698	PG 13.5	6 - 13	50
PMSKV 13.5-25 EMV-Z	Brass	10101196	PG 13.5	9 - 17	50
PMSKV 16-20 EMV-Z	Brass	10100699	PG 16	6 - 13	50
PMSKV 16-25 EMV-Z	Brass	10100700	PG 16	9 - 17	50
PMSKV 21-25 EMV-Z	Brass	10100701	PG 21	9 - 17	50
PMSKV 21-32 EMV-Z	Brass	10100702	PG 21	13 - 21	25
PMSKV 29-40 EMV-Z	Brass	10100703	PG 29	16 - 28	10
PMSKV 36-50 EMV-Z	Brass	10100704	PG 36	21 - 35	10
PMSKV 42-50 EMV-Z	Brass	10100705	PG 42	21 - 35	10
PMSKV 48-63 EMV-Z	Brass	10100706	PG 48	34 - 48	10

Cable Glands - EMC

SPRINT - Brass, Earthing Cones DIN 89345, NPT, NMSKV EMV-Z
IP68 (5 bar 30 min) / IP69, Gland Brass nickel-plated, clamping cage Polyamide, Gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C - 100°C.




NMSKV EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
NMSKV 1/4 EMV-Z	Brass	10065488	NPT 1/4"	3 - 7	50
NMSKV 3/8 EMV-Z	Brass	10065489	NPT 3/8"	4.5 - 10	50
NMSKV 1/2 EMV-Z	Brass	10065490	NPT 1/2"	6 - 13	50
NMSKV 3/4 EMV-Z	Brass	10065491	NPT 3/4"	9 - 17	50
NMSKV 1 EMV-Z	Brass	10065492	NPT 1"	13 - 21	25
NMSKV 1 1/4 EMV-Z	Brass	10065493	NPT 1 1/4"	16 - 28	10
NMSKV 1 1/2 EMV-Z	Brass	10065494	NPT 1 1/2"	21 - 35	10
NMSKV 2 EMV-Z	Brass	10065495	NPT 2"	34 - 48	10

CABLE GLANDS - EMC ACCESSORIES

Cable Glands - EMC Accessories

SPRINT - EMC earthing Cones DIN 89345, Brass Chromium-plated, EE
Brass chromium-plated, temperature range -150°C - 250°C





EE

Type	Colour	Code	Suitable for Cable Gland Type	Clamping Range (mm)	Qty
EE 10-03	Brass	50101021	HatGLAND M12	3	1
EE 12-05	Brass	50085887	SPRINT M12	5	1
EE 14-07	Brass	50101022	HatGLAND M16	7	1
EE 16-06	Brass	50084648	SPRINT M16 / KVM 16	6	1
EE 16-07	Brass	50085652	SPRINT M16 / KVM 16	7.5	1
EE 18-06	Brass	50084649	SPRINT M20 / KVM 18 / HatGLAND M20	6	1
EE 18-07	Brass	50080958	SPRINT M20 / KVM 18 / HatGLAND M20	7	1
EE 18-09	Brass	50085650	SPRINT M20 / KVM 18 / HatGLAND M20	9.5	1
EE 22-14	Brass	50101023	HatGLAND M25	14.5	1
EE 24-06	Brass	50084650	SPRINT M25 / KVM M4	6	1
EE 24-07	Brass	50080960	SPRINT M25 / KVM 24	7	1
EE 24-08	Brass	50084651	SPRINT M25 / KVM 24	8	1
EE 24-10	Brass	50080962	SPRINT M25 / KVM 24	10.5	1
EE 24-13	Brass	50080963	SPRINT M25 / KVM 24	13	1
EE 24-14	Brass	50080964	SPRINT M25 / KVM 24	14.5	1
EE 24-16	Brass	50085654	SPRINT M25 / KVM 24	16	1
EE 30-16	Brass	50084652	SPRINT M32 / KVM 30 / HatGLAND M32	16	1
EE 30-18	Brass	50081743	SPRINT M32 / KVM 30 / HatGLAND M32	18	1
EE 30-20	Brass	50085655	SPRINT M32 / KVM 30 / HatGLAND M32	20	1
EE 36-20	Brass	50080967	SPRINT M40 / KVM 36 / HatGLAND M40	20	1
EE 36-22	Brass	50084653	SPRINT M40 / KVM 36 / HatGLAND M40	22	1
EE 36-24	Brass	50080969	SPRINT M40 / KVM 36 / HatGLAND M40	24	1
EE 36-26	Brass	50085656	SPRINT M40 / KVM 36 / HatGLAND M40	26	1
EE 45-27	Brass	50081592	SPRINT M50 / KVM 45 / HatGLAND M50	27	1
EE 45-30	Brass	50081407	SPRINT M50 / KVM 45 / HatGLAND M50	30	1
EE 45-33	Brass	50085657	SPRINT M50 / KVM 45 / HatGLAND M50	33	1
EE 56-35	Brass	50081406	SPRINT M63 / KVM 56 / HatGLAND M63	35	1
EE 56-39	Brass	50080768	SPRINT M63 / KVM 56 / HatGLAND M63	39	1
EE 56-45	Brass	50085658	SPRINT M63 / KVM 56 / HatGLAND M63	45	1
EE 72-44	Brass	50080955	KVM 72	44	1
EE 72-49	Brass	50080954	KVM 72	49	1
EE 72-58	Brass	50085659	KVM 72	58	1
EE 80-62	Brass	50082650	KVM 80	62	1
EE 105-72	Brass	50084654	KVM 105	72	1
EE 105-77	Brass	50084655	KVM 105	77	1

Cable Glands - EMC Accessories

SPRINT - EMC Contact Spring Inserts, Stainless Steel, EMV-S
Stainless Steel 1.4310, temperature range -100°C - 500°C



EMV-S

Continues on next page...

Continued...

Type	Colour	Code	Suitable for Cable Gland Type	Clamping Range (mm)	Qty
EMV-S 12	Stainless Steel	10102528	SPRINT M12	3 - 7	5
EMV-S 16	Stainless Steel	10102529	SPRINT M16	4.5 - 10	5
EMV-S 20	Stainless Steel	10102530	SPRINT M20	6 - 13	5
EMV-S 25	Stainless Steel	10102531	SPRINT M25	9 - 17	5
EMV-S 32	Stainless Steel	10102532	SPRINT M32	13 - 21	5
EMV-S 40	Stainless Steel	10102533	SPRINT M40	16 - 28	1
EMV-S 50	Stainless Steel	10102534	SPRINT M50	21 - 35	1
EMV-S 63	Stainless Steel	10102535	SPRINT M63	34 - 48	1

Cable Glands - EMC Accessories

SPRINT - Locknut, Brass Nickel-plated, EMMU-EMV

Brass chromium-plated, temperature range -250°C - 500°C



EMMU-EMV

Type	Colour	Code	Size	Qty
EMMU-EMV 12	Brass	10063210	M12	100
EMMU-EMV 16	Brass	10063211	M16	100
EMMU-EMV 20	Brass	10063212	M20	100
EMMU-EMV 25	Brass	10063213	M25	100
EMMU-EMV 32	Brass	10063214	M32	100
EMMU-EMV 40	Brass	10063215	M40	50
EMMU-EMV 50	Brass	10063216	M50	50
EMMU-EMV 63	Brass	10063217	M63	25
EMMU-EMV 75	Brass	10102228	M75	1

Cable Glands - EMC Accessories

Locknut, Brass Nickel-plated, PG, MMU-EMV

Brass chromium-plated, temperature range -250°C - 500°C



MMU-EMV

Type	Colour	Code	Size	Qty
MMU-EMV 7	Brass	10063218	PG 7	100
MMU-EMV 9	Brass	10063219	PG 9	100
MMU-EMV 11	Brass	10063220	PG 11	100
MMU-EMV 13.5	Brass	10063221	PG 13.5	100
MMU-EMV 16	Brass	10063222	PG 16	100
MMU-EMV 21	Brass	10063223	PG 21	50
MMU-EMV 29	Brass	10063224	PG 29	50
MMU-EMV 36	Brass	10063225	PG 36	50
MMU-EMV 42	Brass	10063226	PG 42	50
MMU-EMV 48	Brass	10063227	PG 48	50

Cable Glands - EMC Accessories

MagikNUT - Polyamide EMC Locknut

Polyamide outerbody, stainless steel inner clip, temperature range -40°C - 100°C.



MagikNUT



Continued...

Type	Colour	Code	Size	Qty
MagikNUT 16		10110660	M16	25
MagikNUT 20		10110661	M20	25
MagikNUT 25		10110662	M25	25
MagikNUT 16		10111060	M16	25
MagikNUT 20		10111061	M20	25
MagikNUT 25		10111062	M25	25

CABLE GLANDS - EX

Cable Glands - EX

SPRINT - Polyamide, for Increased Safety, ESKE/1-e

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-e



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKE/1-e 12		10103363	M12	3 - 6	50
ESKE/1-e 16		10103364	M16	4.5 - 9	50
ESKE/1-e 20		10103365	M20	7 - 13	50
ESKE/1-e 25		10103366	M25	10 - 17	50
ESKE/1-e 32		10103367	M32	13 - 21	25
ESKE/1-e 40		10103368	M40	17 - 28	10
ESKE/1-e 50		10103369	M50	23 - 35	4
ESKE/1-e 63		10103370	M63	34 - 48	1

Cable Glands - EX

SPRINT - Polyamide, for Increased Safety, Long Thread ESKE/1-L-e

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-L-e

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKE/1-L-e 12		10103379	M12	15	3 - 6	50
ESKE/1-L-e 16		10103380	M16	15	4.5 - 9	50
ESKE/1-L-e 20		10103381	M20	15	7 - 13	50
ESKE/1-L-e 25		10103382	M25	15	10 - 17	50
ESKE/1-L-e 32		10103383	M32	15	13 - 21	25
ESKE/1-L-e 40		10103384	M40	18	17 - 28	10
ESKE/1-L-e 50		10103385	M50	18	23 - 35	4
ESKE/1-L-e 63		10103386	M63	18	34 - 48	1


Cable Glands - EX
SPRINT - Polyamide, for Increased Safety, Low Temperature ESKE/1-e LT
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket silicone,
 low temperature -60°C · 75°C, glow wire test 750°C
 marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-e LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKE/1-e 12 LT		10103429	M12	3 - 6	50
ESKE/1-e 16 LT		10103430	M16	4.5 - 9	50
ESKE/1-e 20 LT		10103431	M20	7 - 13	50
ESKE/1-e 25 LT		10103432	M25	10 - 17	50
ESKE/1-e 32 LT		10103433	M32	13 - 21	25
ESKE/1-e 40 LT		10103434	M40	17 - 28	10
ESKE/1-e 50 LT		10103435	M50	23 - 35	4
ESKE/1-e 63 LT		10103436	M63	34 - 48	1

Cable Glands - EX
SPRINT - Polyamide, for Increased Safety, Low Temperature, Long Thread ESKE/1-L-e LT
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM,
 low temperature -60°C · 75°C, glow wire test 750°C
 marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-L-e LT

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKE/1-L-e 12 LT		10103445	M12	15	3 - 6	50
ESKE/1-L-e 16 LT		10103446	M16	15	4.5 - 9	50
ESKE/1-L-e 20 LT		10103447	M20	15	7 - 13	50
ESKE/1-L-e 25 LT		10103448	M25	15	10 - 17	50
ESKE/1-L-e 32 LT		10103449	M32	15	13 - 21	25
ESKE/1-L-e 40 LT		10103450	M40	18	17 - 28	10
ESKE/1-L-e 50 LT		10103451	M50	18	23 - 35	4
ESKE/1-L-e 63 LT		10103452	M63	18	34 - 48	1

Cable Glands - EX
SPRINT - Polyamide, for Increased Safety, with Bend Protection ESKE/1S-e
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM,
 temperature range -40°C · 75°C, glow wire test 750°C,
 marking Ex eb / Ex tb, approval IECEx / ATEX




ESKE/1S-e

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKE/1S-e 12		10103493	M12	3 - 6	50
ESKE/1S-e 16		10103494	M16	4.5 - 9	50
ESKE/1S-e 20		10103495	M20	7 - 13	50
ESKE/1S-e 25		10103496	M25	10 - 17	25
ESKE/1S-e 32		10103497	M32	13 - 21	10

Cable Glands - EX
SPRINT - Polyamide, for Increased Safety, with Bend Protection, Long Thread ESKE/1S-L-e

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM,
 temperature range -40°C · 75°C, glow wire test 750°C,
 marking Ex eb / Ex tb, approval IECEx / ATEX




ESKE/1S-L-e

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKE/1S-L-e 12		10103503	M12	15	3 - 6	50
ESKE/1S-L-e 16		10103504	M16	15	4.5 - 9	50
ESKE/1S-L-e 20		10103505	M20	15	7 - 13	50
ESKE/1S-L-e 25		10103506	M25	15	10 - 17	50
ESKE/1S-L-e 32		10103507	M32	15	13 - 21	10

Cable Glands - EX
SPRINT - Polyamide, for Intrinsic Safety, ESKE/1-i

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM,
 temperature range -40°C · 75°C, glow wire test 750°C,
 marking Ex eb / Ex tb, approval IECEx / ATEX




ESKE/1-i



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKE/1-i 12		10103371	M12	3 - 6	50
ESKE/1-i 16		10103372	M16	4.5 - 9	50
ESKE/1-i 20		10103373	M20	7 - 13	50
ESKE/1-i 25		10103374	M25	10 - 17	50
ESKE/1-i 32		10103375	M32	13 - 21	25
ESKE/1-i 40		10103376	M40	17 - 28	10
ESKE/1-i 50		10103377	M50	23 - 35	4
ESKE/1-i 63		10103378	M63	34 - 48	1


Cable Glands - EX
SPRINT - Polyamide, for Intrinsic Safety, Long Thread ESKE/1-L-i
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-L-i

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKE/1-L-i 12		10103387	M12	15	3 - 6	50
ESKE/1-L-i 16		10103388	M16	15	4.5 - 9	50
ESKE/1-L-i 20		10103389	M20	15	7 - 13	50
ESKE/1-L-i 25		10103390	M25	15	10 - 17	50
ESKE/1-L-i 32		10103391	M32	15	13 - 21	25
ESKE/1-L-i 40		10103392	M40	18	17 - 28	10
ESKE/1-L-i 50		10103393	M50	18	23 - 35	4
ESKE/1-L-i 63		10103394	M63	18	34 - 48	1

Cable Glands - EX
SPRINT - Polyamide, for Intrinsic Safety, Low Temperature ESKE/1-i LT
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket silicone, low temperature -60°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-i LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKE/1-i 12 LT		10103437	M12	3 - 6	50
ESKE/1-i 16 LT		10103438	M16	4.5 - 9	50
ESKE/1-i 20 LT		10103439	M20	7 - 13	50
ESKE/1-i 25 LT		10103440	M25	10 - 17	50
ESKE/1-i 32 LT		10103441	M32	13 - 21	25
ESKE/1-i 40 LT		10103442	M40	17 - 28	10
ESKE/1-i 50 LT		10103443	M50	23 - 35	4
ESKE/1-i 63 LT		10103444	M63	34 - 48	1

Cable Glands - EX
SPRINT - Polyamide, for Intrinsic Safety, Low Temperature Long Thread ESKE/1-L-i LT
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket silicone, low temperature marking -60°C - 75°C, glow wire test 750°C, Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-L-i LT

Continued...

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKE/1-L-i 12 LT		10103453	M12	15	3 - 6	50
ESKE/1-L-i 16 LT		10103454	M16	15	4.5 - 9	50
ESKE/1-L-i 20 LT		10103455	M20	15	7 - 13	50
ESKE/1-L-i 25 LT		10103456	M25	15	10 - 17	50
ESKE/1-L-i 32 LT		10103457	M32	15	13 - 21	25
ESKE/1-L-i 40 LT		10103458	M40	18	17 - 28	10
ESKE/1-L-i 50 LT		10103459	M50	18	23 - 35	4
ESKE/1-L-i 63 LT		10103460	M63	18	34 - 48	1

Cable Glands - EX
SPRINT - Polyamide, for Intrinsic Safety, with Bend Protection, ESKE/1S-i
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1S-i

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKE/1S-i 12		10103498	M12	3 - 6	50
ESKE/1S-i 16		10103499	M16	4.5 - 9	50
ESKE/1S-i 20		10103500	M20	7 - 13	50
ESKE/1S-i 25		10103501	M25	10 - 17	25
ESKE/1S-i 32		10103502	M32	13 - 21	10

Cable Glands - EX
SPRINT - Polyamide, for Intrinsic Safety, with Bend Protection, Long Thread ESKE/1S-L-i
 IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX




ESKE/1S-L-i

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKE/1S-L-i 12		10103508	M12	15	3 - 6	50
ESKE/1S-L-i 16		10103509	M16	15	4.5 - 9	50
ESKE/1S-L-i 20		10103510	M20	15	7 - 13	50
ESKE/1S-L-i 25		10103511	M25	15	10 - 17	25
ESKE/1S-L-i 32		10103512	M32	15	13 - 21	10

Cable Glands - EX

SPRINT - Polyamide, for Increased Safety, with External Relief, ESKEZ-e

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKEZ-e

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKEZ-e 20		10100455	M20	8 - 13	50
ESKEZ-e 25		10100456	M25	10 - 17	25
ESKEZ-e 32		10100457	M32	16 - 21	10

Cable Glands - EX

SPRINT - Polyamide, for Increased Safety, with External Relief, Long Thread ESKEZ-L-e

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX




ESKEZ-L-e

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKEZ-L-e 20		10100848	M20	15	8 - 13	50
ESKEZ-L-e 25		10100849	M25	15	10 - 17	25
ESKEZ-L-e 32		10100850	M32	15	16 - 21	10

Cable Glands - EX

SPRINT - Polyamide, for Intrinsic Safety, with External Relief, ESKEZ-i

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKEZ-i

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKEZ-i 20		10100453	M20	8 - 13	50
ESKEZ-i 25		10100846	M25	10 - 17	25
ESKEZ-i 32		10100454	M32	16 - 21	10

Cable Glands - EX

SPRINT - Polyamide, for Intrinsic Safety, with External Relief, Long Thread ESKEZ-L-i

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX




ESKEZ-L-i

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
ESKEZ-L-i 20		10100852	M20	15	8 - 13	50
ESKEZ-L-i 25		10100853	M25	15	10 - 17	25
ESKEZ-L-i 32		10100854	M32	15	16 - 21	10

Cable Glands - EX

SPRINT - Polyamide, for Increased Safety, with Mounted MFD, ESKE/1-e

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, gasket TPE temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX




ESKE/1-e

Type	Colour	Code	Size	Number of Inserts	Insert Clamping Range (mm)	Qty
ESKE/1-e 20 MFD 02/055		10110791	M20	2	4.9 - 5.5	50
ESKE/1-e 20 MFD 03/040		10110904	M20	3	3.6 - 4	50
ESKE/1-e 20 MFD 04/040		10110262	M20	4	3.6 - 4	50
ESKE/1-e 25 MFD 02/080		10110976	M25	2	7.2 - 8	50
ESKE/1-e 25 MFD 02/060		10110977	M25	2	5.4 - 6	50
ESKE/1-e 25 MFD 03/060		10111125	M25	3	5.4 - 6	50
ESKE/1-e 25 MFD 04/060		10109527	M25	4	5.4 - 6	50
ESKE/1-e 32 MFD 04/070		10110870	M32	4	6.3 - 7	25
ESKE/1-e 32 MFD 04/080		10110263	M32	4	7.2 - 8	25
ESKE/1-e 32 MFD 06/060		10110264	M32	6	5.4 - 6	25
ESKE/1-e 32 MFD 08/040		10110265	M32	8	3.6 - 4	25

Cable Glands - EX

SPRINT - Polyamide, for Intrinsic Safety, with Mounted MFD, ESKE/1-i

IP66 / IP68 (5 bar 30 min), gland Polyamide, gasket EPDM, gasket TPE, temperature range -40°C - 75°C, glow wire test 750°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESKE/1-i

Type	Colour	Code	Size	Number of Inserts	Insert Clamping Range (mm)	Qty
ESKE/1-i 20 MFD 02/050		10110772	M20	2	4.5 - 5	50
ESKE/1-i 20 MFD 04/040		10110266	M20	4	3.6 - 4	50

Continued...

Type	Colour	Code	Size	Number of Inserts	Insert Clamping Range (mm)	Qty
ESKE/1-i 25 MFD 04/060		10109528	M25	4	5.4 - 6	50
ESKE/1-i 32 MFD 04/080		10110267	M32	4	7.2 - 8	25
ESKE/1-i 32 MFD 06/060		10110268	M32	6	5.4 - 6	25
ESKE/1-i 32 MFD 08/040		10110269	M32	8	3.6 - 4	25
ESKE/1-i 40 MFD 04/100		10110942	M40	4	9 - 10	10

Cable Glands - EX SPRINT - Brass, EMSKE

IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX




EMSKE

Type	Colour	Code	Size	Insert Clamping Range (mm)	Qty
EMSKE 12	Brass	10065040	M12	4 - 7	50
EMSKE 16	Brass	10065041	M16	5 - 10	50
EMSKE 20	Brass	10065042	M20	6 - 13	50
EMSKE 25	Brass	10065043	M25	10 - 17	50
EMSKE 32	Brass	10065044	M32	13 - 21	25
EMSKE 40	Brass	10065045	M40	16 - 28	10
EMSKE 50	Brass	10065046	M50	21 - 35	10
EMSKE 63	Brass	10065047	M63	34 - 48	10
EMSKE 75	Brass	10104386	M75	48 - 62	1

Cable Glands - EX SPRINT - Brass, Long Thread, EMSKE-L

IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX




EMSKE-L

Type	Colour	Code	Size	Long Thread (mm)	Insert Clamping Range (mm)	Qty
EMSKE-L 12	Brass	10065048	M12	12	4 - 7	50
EMSKE-L 16	Brass	10065049	M16	12	5 - 10	50
EMSKE-L 20	Brass	10065050	M20	12	6 - 13	50
EMSKE-L 25	Brass	10065051	M25	12	10 - 17	50
EMSKE-L 32	Brass	10065052	M32	15	13 - 21	25
EMSKE-L 40	Brass	10065053	M40	15	16 - 28	10
EMSKE-L 50	Brass	10065054	M50	15	21 - 35	10
EMSKE-L 63	Brass	10065055	M63	15	34 - 48	10

Cable Glands - EX SPRINT - Brass, Low Temperature, EMSKE LT

IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket silicone, clamping cage Polyamide, low temperature -60°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



EMSKE LT

Type	Colour	Code	Size	Insert Clamping Range (mm)	Qty
EMSKE 12 LT	Brass	10065946	M12	4 - 7	50
EMSKE 16 LT	Brass	10065947	M16	5 - 10	50
EMSKE 20 LT	Brass	10065948	M20	6 - 13	50
EMSKE 25 LT	Brass	10065949	M25	10 - 17	50
EMSKE 32 LT	Brass	10065950	M32	13 - 21	25
EMSKE 40 LT	Brass	10065951	M40	16 - 28	10
EMSKE 50 LT	Brass	10065952	M50	21 - 35	10
EMSKE 63 LT	Brass	10065953	M63	34 - 48	10

Cable Glands - EX SPRINT - Brass, Low Temperature, Long Thread, EMSKE-L LT

IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket silicone, clamping cage Polyamide, low temperature -60°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX




EMSKE-L LT

Type	Colour	Code	Size	Long Thread (mm)	Insert Clamping Range (mm)	Qty
EMSKE-L 12 LT	Brass	10065938	M12	12	4 - 7	50
EMSKE-L 16 LT	Brass	10065939	M16	12	5 - 10	50
EMSKE-L 20 LT	Brass	10065940	M20	12	6 - 13	50
EMSKE-L 25 LT	Brass	10065941	M25	12	10 - 17	50
EMSKE-L 32 LT	Brass	10065942	M32	15	13 - 21	25
EMSKE-L 40 LT	Brass	10065943	M40	15	16 - 28	10
EMSKE-L 50 LT	Brass	10065944	M50	15	21 - 35	10
EMSKE-L 63 LT	Brass	10065945	M63	15	34 - 48	10

Cable Glands - EX SPRINT - Brass, NPT, NMSKE

IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX





NMSKE

Continued...

Type	Colour	Code	Size	Insert Clamping Range (mm)	Qty
NMSKE 1/4	Brass	10101082	NPT 1/4"	4 - 7	50
NMSKE 3/8	Brass	10101083	NPT 3/8"	5 - 10	50
NMSKE 1/2	Brass	10101084	NPT 1/2"	6 - 13	50
NMSKE 3/4	Brass	10101085	NPT 3/4"	10 - 17	50
NMSKE 1	Brass	10101086	NPT 1"	13 - 21	25
NMSKE 1 1/4	Brass	10101087	NPT 1 1/4"	16 - 28	10
NMSKE 1 1/2	Brass	10101088	NPT 1 1/2"	21 - 35	10
NMSKE 2	Brass	10101089	NPT 2"	34 - 48	10

Cable Glands - EX

SPRINT - Brass, with Contact Spring Insert, EMSKE EMV-S
 IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, earthing cones stainless steel 1.4310 temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX




EMSKE EMV-S

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKE 12 EMV-S	Brass	10102971	M12	4 - 7	50
EMSKE 16 EMV-S	Brass	10102972	M16	5 - 10	50
EMSKE 20 EMV-S	Brass	10102973	M20	6 - 13	50
EMSKE 25 EMV-S	Brass	10102974	M25	10 - 17	50
EMSKE 32 EMV-S	Brass	10102975	M32	13 - 21	25
EMSKE 40 EMV-S	Brass	10102976	M40	16 - 28	10
EMSKE 50 EMV-S	Brass	10102977	M50	21 - 35	10
EMSKE 63 EMV-S	Brass	10102978	M63	34 - 48	10

Cable Glands - EX

SPRINT - Brass, with Contact Spring Insert, Long Thread, EMSKE-L EMV-S
 IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, earthing cones stainless steel 1.4310 temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX




EMSKE-L EMV-S

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
EMSKE-L 12 EMV-S	Brass	10109986	M12	12	4 - 7	50
EMSKE-L 16 EMV-S	Brass	10109987	M16	12	5 - 10	50
EMSKE-L 20 EMV-S	Brass	10109988	M20	12	6 - 13	50
EMSKE-L 25 EMV-S	Brass	10109989	M25	12	10 - 17	50
EMSKE-L 32 EMV-S	Brass	10109990	M32	15	13 - 21	25
EMSKE-L 40 EMV-S	Brass	10109991	M40	15	16 - 28	10
EMSKE-L 50 EMV-S	Brass	10109992	M50	15	21 - 35	10
EMSKE-L 63 EMV-S	Brass	10109993	M63	15	34 - 48	10

Cable Glands - EX

SPRINT - Brass, with Earthing Cones DIN 89345, EMSKE EMV-Z
 IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX



EMSKE EMV-Z



Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKE 12 EMV-Z	Brass	10065056	M12	4 - 7	50
EMSKE 16 EMV-Z	Brass	10065057	M16	5 - 10	50
EMSKE 20 EMV-Z	Brass	10065058	M20	6 - 13	50
EMSKE 25 EMV-Z	Brass	10065059	M25	10 - 17	50
EMSKE 32 EMV-Z	Brass	10065060	M32	13 - 21	25
EMSKE 40 EMV-Z	Brass	10065061	M40	16 - 28	10
EMSKE 50 EMV-Z	Brass	10065062	M50	21 - 35	10
EMSKE 63 EMV-Z	Brass	10065063	M63	34 - 48	10
EMSKE 75 EMV-Z	Brass	10104143	M75	48 - 62	1

Cable Glands - EX

SPRINT - Brass, with Earthing Cones DIN 89345, Long Thread, EMSKE-L EMV-Z

IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX





EMSKE-L EMV-Z

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty
EMSKE-L 12 EMV-Z	Brass	10065922	M12	12	4 - 7	50
EMSKE-L 16 EMV-Z	Brass	10065923	M16	12	5 - 10	50
EMSKE-L 20 EMV-Z	Brass	10065924	M20	12	6 - 13	50
EMSKE-L 25 EMV-Z	Brass	10065925	M25	12	10 - 17	50
EMSKE-L 32 EMV-Z	Brass	10065926	M32	15	13 - 21	25
EMSKE-L 40 EMV-Z	Brass	10065927	M40	15	16 - 28	10
EMSKE-L 50 EMV-Z	Brass	10065928	M50	15	21 - 35	10
EMSKE-L 63 EMV-Z	Brass	10065929	M63	15	34 - 48	10

Cable Glands - EX

SPRINT - Brass, with Earthing Cones DIN 89345, LowTemp, EMSKE LT EMV-Z

IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket silicone, clamping cage Polyamide, low temperature -60 °C - 75 °C, marking Ex eb / Ex tb, approval IECEx / ATEX



EMSKE-LT EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKE 12 LT EMV-Z	Brass	10105724	M12	4 - 7	50
EMSKE 16 LT EMV-Z	Brass	10105725	M16	5 - 10	50
EMSKE 20 LT EMV-Z	Brass	10104838	M20	6 - 13	50
EMSKE 25 LT EMV-Z	Brass	10104395	M25	10 - 17	50
EMSKE 32 LT EMV-Z	Brass	10103045	M32	13 - 21	25
EMSKE 40 LT EMV-Z	Brass	10105726	M40	16 - 28	10
EMSKE 50 LT EMV-Z	Brass	10105727	M50	21 - 35	10
EMSKE 63 LT EMV-Z	Brass	10105728	M63	34 - 48	10

Cable Glands - EX

SPRINT - Brass, with Earthing Cones DIN 89345, NPT, NMSKE EMV-Z
IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, marking Ex eb / Ex tb, approval IECEx / ATEX




NMSKE EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
NMSKE 1/4 EMV-Z	Brass	10063055	NPT 1/4"	4 - 7	50
NMSKE 3/8 EMV-Z	Brass	10063056	NPT 3/8"	5 - 10	50
NMSKE 1/2 EMV-Z	Brass	10063057	NPT 1/2"	6 - 13	50
NMSKE 3/4 EMV-Z	Brass	10063058	NPT 3/4"	10 - 17	50
NMSKE 1 EMV-Z	Brass	10063059	NPT 1"	13 - 21	25
NMSKE 1 1/4 EMV-Z	Brass	10063060	NPT 1 1/4"	16 - 28	10
NMSKE 1 1/2 EMV-Z	Brass	10063061	NPT 1 1/2"	21 - 35	10
NMSKE 2 EMV-Z	Brass	10063062	NPT 2"	34 - 48	10

Cable Glands - EX

SPRINT - Brass, with Mounted MFD, EMSKE
IP66 / IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX



EMSKE

Type	Colour	Code	Size	Number of Inserts	Insert Clamping Range (mm)	Qty
EMSKE 20 MFD 02/060	Brass	10110038	M20	2	5.4 - 6	50
EMSKE 20 MFD 02/065	Brass	10110369	M20	2	5.9 - 6.5	50
EMSKE 25 MFD 02/060	Brass	10110795	M25	2	5.4 - 6	50
EMSKE 25 MFD 03/070	Brass	10110411	M25	3	6.3 - 7	50
EMSKE 50 MFD 03/157	Brass	10110812	M50	3	14.7 - 15.7	10
EMSKE-L 20 MFD 02/050	Brass	10110797	M20	2	4.5 - 5	50

Cable Glands - EX

SPRINT - Brass, with External Strain Relief, EMSKEZ
IP68 (5 bar 30 min), gland Brass nickel-plated, gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX



EMSKEZ

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKEZ 16	Brass	10063071	M16	6.5 - 10	25
EMSKEZ 20	Brass	10063072	M20	8 - 13	25
EMSKEZ 25	Brass	10063073	M25	10 - 17	25
EMSKEZ 32	Brass	10063074	M32	16 - 21	25
EMSKEZ 40	Brass	10063075	M40	18 - 28	10
EMSKEZ 50	Brass	10063076	M50	22 - 35	10
EMSKEZ 63	Brass	10063077	M63	35 - 48	10

Cable Glands - EX

SPRINT - Stainless Steel A2 (1.4305), ESSKE
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A2 (1.4305), gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX




ESSKE

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE 12	Stainless Steel	10069200	M12	4 - 7	10
ESSKE 16	Stainless Steel	10069201	M16	5 - 10	10
ESSKE 20	Stainless Steel	10069202	M20	6 - 13	10
ESSKE 25	Stainless Steel	10069203	M25	10 - 17	10
ESSKE 32	Stainless Steel	10069204	M32	13 - 21	5
ESSKE 40	Stainless Steel	10069205	M40	16 - 28	5
ESSKE 50	Stainless Steel	10069206	M50	21 - 35	2
ESSKE 63	Stainless Steel	10069207	M63	34 - 48	1

Cable Glands - EX

SPRINT - Stainless Steel A4 (1.4404), ESSKE-4
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A4 (1.4404), gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX



ESSKE-4

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE-4 12	Stainless Steel	10069232	M12	4 - 7	10
ESSKE-4 16	Stainless Steel	10069233	M16	5 - 10	10
ESSKE-4 20	Stainless Steel	10069234	M20	6 - 13	10
ESSKE-4 25	Stainless Steel	10069235	M25	10 - 17	10
ESSKE-4 32	Stainless Steel	10069236	M32	13 - 21	5
ESSKE-4 40	Stainless Steel	10069237	M40	16 - 28	5
ESSKE-4 50	Stainless Steel	10069238	M50	21 - 35	2
ESSKE-4 63	Stainless Steel	10069239	M63	34 - 48	1

Cable Glands - EX

SPRINT - Stainless Steel A2 (1.4305), LowTemp, ESSKE
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A2 (1.4305), gasket silicone, clamping cage Polyamide, low temperature -60°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESSKE LT


Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE 12 LT	Stainless Steel	10065986	M12	4 - 7	10
ESSKE 16 LT	Stainless Steel	10065987	M16	5 - 10	10

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE 20 LT	Stainless Steel	10065988	M20	6 - 13	10
ESSKE 25 LT	Stainless Steel	10065989	M25	10 - 17	10
ESSKE 32 LT	Stainless Steel	10065990	M32	13 - 21	5
ESSKE 40 LT	Stainless Steel	10065991	M40	16 - 28	5
ESSKE 50 LT	Stainless Steel	10065992	M50	21 - 35	2
ESSKE 63 LT	Stainless Steel	10065993	M63	34 - 48	1

Cable Glands - EX

SPRINT - Stainless Steel A4 (1.4404), LowTemp, ESSKE-4
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A4 (1.4404), gasket silicone, clamping cage Polyamide, low temperature -60°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX




ESSKE-4 LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE-4 12 LT	Stainless Steel	10065389	M12	4 - 7	10
ESSKE-4 16 LT	Stainless Steel	10065390	M16	5 - 10	10
ESSKE-4 20 LT	Stainless Steel	10065391	M20	6 - 13	10
ESSKE-4 25 LT	Stainless Steel	10065392	M25	10 - 17	10
ESSKE-4 32 LT	Stainless Steel	10065393	M32	13 - 21	5
ESSKE-4 40 LT	Stainless Steel	10065394	M40	16 - 28	5
ESSKE-4 50 LT	Stainless Steel	10065395	M50	21 - 35	2
ESSKE-4 63 LT	Stainless Steel	10065396	M63	34 - 48	1

Cable Glands - EX

SPRINT - Stainless Steel A2 (1.4305), with Earthing Cones DIN 89345, ESSKE EMV-Z
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A2 (1.4305), gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX



ESSKE EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE 12 EMV-Z	Stainless Steel	10069216	M12	4 - 7	10
ESSKE 16 EMV-Z	Stainless Steel	10069217	M16	5 - 10	10
ESSKE 20 EMV-Z	Stainless Steel	10069218	M20	6 - 13	10
ESSKE 25 EMV-Z	Stainless Steel	10069219	M25	10 - 17	10
ESSKE 32 EMV-Z	Stainless Steel	10069220	M32	13 - 21	5
ESSKE 40 EMV-Z	Stainless Steel	10069221	M40	16 - 28	5
ESSKE 50 EMV-Z	Stainless Steel	10069222	M50	21 - 35	2
ESSKE 63 EMV-Z	Stainless Steel	10069223	M63	34 - 48	1

Cable Glands - EX

SPRINT - Stainless Steel A4 (1.4404), with Earthing Cones DIN 89345, ESSKE-4 EMV-Z
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A4 (1.4404), gasket EPDM, clamping cage Polyamide, temperature range -40°C - 75°C marking Ex eb / Ex tb, approval IECEx / ATEX




ESSKE-4 EMV-Z

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE-4 12 EMV-Z	Stainless Steel	10069248	M12	4 - 7	10
ESSKE-4 16 EMV-Z	Stainless Steel	10069249	M16	5 - 10	10
ESSKE-4 20 EMV-Z	Stainless Steel	10069250	M20	6 - 13	10
ESSKE-4 25 EMV-Z	Stainless Steel	10069251	M25	10 - 17	10
ESSKE-4 32 EMV-Z	Stainless Steel	10069252	M32	13 - 21	5
ESSKE-4 40 EMV-Z	Stainless Steel	10069253	M40	16 - 28	5
ESSKE-4 50 EMV-Z	Stainless Steel	10069254	M50	21 - 35	2
ESSKE-4 63 EMV-Z	Stainless Steel	10069255	M63	34 - 48	1

Cable Glands - EX

SPRINT - Stainless Steel A2 (1.4305), with Earthing Cones DIN 89345, LowTemp, ESSKE LT EMV-Z
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A2 (1.4305), gasket silicone, clamping cage Polyamide, low temperature -60°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESSKE LT EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE 12 LT EMV-Z	Stainless Steel	10065978	M12	4 - 7	10
ESSKE 16 LT EMV-Z	Stainless Steel	10065979	M16	5 - 10	10
ESSKE 20 LT EMV-Z	Stainless Steel	10065980	M20	6 - 13	10
ESSKE 25 LT EMV-Z	Stainless Steel	10065981	M25	10 - 17	10
ESSKE 32 LT EMV-Z	Stainless Steel	10065982	M32	13 - 21	5
ESSKE 40 LT EMV-Z	Stainless Steel	10065983	M40	16 - 28	5
ESSKE 50 LT EMV-Z	Stainless Steel	10065984	M50	21 - 35	2
ESSKE 63 LT EMV-Z	Stainless Steel	10065985	M63	34 - 48	1

Cable Glands - EX

SPRINT - Stainless Steel A4 (1.4404), with Earthing Cones DIN 89345, LowTemp, ESSKE-4 LT EMV-Z
IP66 / IP68 (5 bar 30 min), gland Stainless Steel A4 (1.4404), gasket silicone, clamping cage Polyamide, low temperature -60°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



ESSKE-4 LT EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKE-4 12 LT EMV-Z	Stainless Steel	10065358	M12	4 - 7	10
ESSKE-4 16 LT EMV-Z	Stainless Steel	10065359	M16	5 - 10	10
ESSKE-4 20 LT EMV-Z	Stainless Steel	10065360	M20	6 - 13	10
ESSKE-4 25 LT EMV-Z	Stainless Steel	10065361	M25	10 - 17	10
ESSKE-4 32 LT EMV-Z	Stainless Steel	10065362	M32	13 - 21	5
ESSKE-4 40 LT EMV-Z	Stainless Steel	10065363	M40	16 - 28	5
ESSKE-4 50 LT EMV-Z	Stainless Steel	10065364	M50	21 - 35	2
ESSKE-4 63 LT EMV-Z	Stainless Steel	10065365	M63	34 - 48	1

BRACE SYSTEM

JOINTS

CABLE GLANDS

CABLE ENTRIES

ENCLOSURES

JUNCTION BOXES

LIGHTING

TECHNICAL DATA

Cable Glands - EX

EX d - Brass, for Non-Armoured Cables, OS-A2F-U

IP66 / IP67, gland Brass nickel-plated, gasket silicone, temperature range -60°C - 110°C marking Ex eb / Ex tb / Ex db, approval IECEx / ATEX



OS-A2F-U

Type	Colour	Code	Size	Clamping Range (mm)	Qty
OS-A2F-U 16 / M16	Brass	50107568	M16	3 - 7	1
OS-A2F-U 16X / M16	Brass	50107569	M16	5 - 10.3	1
OS-A2F-U 16X / M20	Brass	50108019	M20	5 - 10.3	1
OS-A2F-U 20 / M20	Brass	50107570	M20	9 - 15.3	1
OS-A2F-U 25 / M25	Brass	50107571	M25	13 - 20	1
OS-A2F-U 32 / M32	Brass	50107572	M32	17 - 26.5	1
OS-A2F-U 40 / M40	Brass	50107573	M40	22 - 32	1
OS-A2F-U 50 / M50	Brass	50107574	M50	30 - 42	1
OS-A2F-U 63 / M63	Brass	50107575	M63	39 - 51	1
OS-A2F-U 63X / M63	Brass	50107576	M63	46 - 55	1
OS-A2F-U 75 / M75	Brass	50107577	M75	54 - 61	1
OS-A2F-U 75X / M75	Brass	50107578	M75	58 - 68	1

Cable Glands - EX

EX d - Brass, for Armoured Cables, OS-E1UF

IP66 / IP67, gland Brass nickel-plated, gasket silicone, temperature range -60°C - 110°C marking Ex eb / Ex tb / Ex db, approval IECEx / ATEX




OS-E1UF

Type	Colour	Code	Size	Clamping Range (mm)	Qty
OS-E1UF-U 16 / M16	Brass	50107579	M16	7 - 16.1	1
OS-E1UF-U 20 / M20	Brass	50107580	M20	12 - 21	1
OS-E1UF-U 25 / M25	Brass	50107581	M25	17 - 26.2	1
OS-E1UF-U 32 / M32	Brass	50107582	M32	22 - 34	1
OS-E1UF-U 40 / M40	Brass	50107583	M40	30 - 42	1
OS-E1UF-U 50 / M50	Brass	50107584	M50	38 - 53.7	1
OS-E1UF-U 63 / M63	Brass	50107585	M63	45 - 60	1
OS-E1UF-U 63X / M63	Brass	50107586	M63	52 - 66	1
OS-E1UF-U 75 / M75	Brass	50107587	M75	58 - 72	1
OS-E1UF-U 75X / M75	Brass	50107588	M75	66.1 - 79	1

Cable Glands - EX

EX d - Brass, for Armoured Cables, OS-E1UF-U, Pack

IP66 / IP67, gland Brass nickel-plated, gasket silicone, shrouds and earth tags, temperature range -60°C - 110°C marking Ex eb / Ex tb / Ex db, approval IECEx / ATEX



OS-E1UF

Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
OS-E1UF-U 16 / M16	Brass	10110318	M16	7 - 16.1	2
OS-E1UF-U 20 / M20	Brass	10110319	M20	12 - 21	2
OS-E1UF-U 25 / M25	Brass	10110320	M25	17 - 26.2	2
OS-E1UF-U 32 / M32	Brass	10110321	M32	22 - 34	2
OS-E1UF-U 40 / M40	Brass	10110322	M40	30 - 42	1
OS-E1UF-U 50 / M50	Brass	10110323	M50	38 - 53.7	1
OS-E1UF-U 63 / M63	Brass	10110324	M63	45 - 60	1
OS-E1UF-U 63X / M63	Brass	10110325	M63	52 - 66	1
OS-E1UF-U 75 / M75	Brass	10110326	M75	58 - 72	1
OS-E1UF-U 75X / M75	Brass	10110327	M75	66.1 - 79	1

Cable Glands - EX

EX d - Brass, for Armoured Cables, NPT, OS-E1UF

IP66 / IP67, gland Brass nickel-plated, gasket silicone, temperature range -60°C - 110°C marking Ex eb / Ex tb / Ex db, approval IECEx / ATEX




OS-E1UF

Type	Colour	Code	Size	Clamping Range (mm)	Qty
OS-E1UF-U 20 / NPT 3/4"	Brass	50107618	NPT 3/4"	12 - 21	1
OS-E1UF-U 32 / NPT 1"	Brass	50107619	NPT 1"	22 - 34	1
OS-E1UF-U 40 / NPT 1-1/4"	Brass	50107620	NPT 1 1/4"	30 - 42	1
OS-E1UF-U 50 / NPT 1-1/2"	Brass	50107621	NPT 1 1/2"	38 - 53.7	1

Cable Glands - EX

EX d - Brass, Stop Ends, OSSP

IP66 / IP67, gland Brass nickel-plated, gasket CR, temperature range -60°C - 120°C marking Ex eb / Ex tb / Ex db, approval IECEx / ATEX




OSSP

Type	Colour	Code	Size	Qty
OSSP-R 16 / M16	Brass	50065610	M16	1
OSSP-R 20 / M20	Brass	50065611	M20	1
OSSP-R 25 / M25	Brass	50065612	M25	1
OSSP-R 32 / M32	Brass	50065613	M32	1
OSSP-R 40 / M40	Brass	50065614	M40	1
OSSP-R 50 / M50	Brass	50065615	M50	1
OSSP-R 63 / M63	Brass	50065616	M63	1
OSSP-R 75 / M75	Brass	50065617	M75	1

Cable Glands - EX

EX d - Brass, Reduction Adaptors, OSRA

IP66 / IP67, gland Brass nickel-plated, temperature range -60°C - 110°C marking Ex eb / Ex tb / Ex db, approval IECEx / ATEX




OSRA

Type	Colour	Code	Outer Thread	Inner Thread	Qty
OSRA 20 / M20(M)*M16(F)	Brass	50065650	M20	M16	1
OSRA 25 / M25(M)*M16(F)	Brass	50065651	M25	M16	1
OSRA 25 / M25(M)*M20(F)	Brass	50065652	M25	M20	1
OSRA 32 / M32(M)*M16(F)	Brass	50065653	M32	M16	1
OSRA 32 / M32(M)*M20(F)	Brass	50065654	M32	M20	1
OSRA 32 / M32(M)*M25(F)	Brass	50065655	M32	M25	1
OSRA 40 / M40(M)*M20(F)	Brass	50065656	M40	M20	1
OSRA 40 / M40(M)*M25(F)	Brass	50065657	M40	M25	1
OSRA 40 / M40(M)*M32(F)	Brass	50065658	M40	M32	1
OSRA 50 / M50(M)*M25(F)	Brass	50065659	M50	M25	1
OSRA 50 / M50(M)*M32(F)	Brass	50065660	M50	M32	1
OSRA 50 / M50(M)*M40(F)	Brass	50065661	M50	M40	1
OSRA 63 / M63(M)*M32(F)	Brass	50065662	M63	M32	1
OSRA 63 / M63(M)*M40(F)	Brass	50065663	M63	M40	1
OSRA 63 / M63(M)*M50(F)	Brass	50065664	M63	M50	1
OSRA 75 / M75(M)*M40(F)	Brass	50065665	M75	M40	1
OSRA 75 / M75(M)*M50(F)	Brass	50065666	M75	M50	1
OSRA 75 / M75(M)*M63(F)	Brass	50065667	M75	M63	1

Cable Glands - EX

EX d - Brass, Enlargement Adaptors, OSAJ

IP66 / IP67, gland Brass nickel-plated, temperature range -60°C - 110°C marking Ex eb / Ex tb / Ex db, approval IECEx / ATEX



OSAJ

Type	Colour	Code	Outer Thread	Inner Thread	Qty
OSAJ 20 / M16(M)*M20(F)	Brass	50065686	M16	M20	1
OSAJ 25 / M16(M)*M25(F)	Brass	50065687	M16	M25	1
OSAJ 25 / M20(M)*M25(F)	Brass	50065688	M20	M25	1
OSAJ 32 / M16(M)*M32(F)	Brass	50065689	M16	M32	1
OSAJ 32 / M20(M)*M32(F)	Brass	50065690	M20	M32	1
OSAJ 32 / M25(M)*M32(F)	Brass	50065691	M25	M32	1
OSAJ 40 / M20(M)*M40(F)	Brass	50065692	M20	M40	1
OSAJ 40 / M25(M)*M40(F)	Brass	50065693	M25	M40	1
OSAJ 40 / M32(M)*M40(F)	Brass	50065694	M32	M40	1
OSAJ 50 / M25(M)*M50(F)	Brass	50065695	M25	M50	1
OSAJ 50 / M32(M)*M50(F)	Brass	50065696	M32	M50	1
OSAJ 50 / M40(M)*M50(F)	Brass	50065697	M40	M50	1
OSAJ 63 / M32(M)*M63(F)	Brass	50065698	M32	M63	1
OSAJ 63 / M40(M)*M63(F)	Brass	50065699	M40	M63	1
OSAJ 63 / M50(M)*M63(F)	Brass	50065700	M50	M63	1
OSAJ 75 / M40(M)*M75(F)	Brass	50065701	M40	M75	1
OSAJ 75 / M50(M)*M75(F)	Brass	50065702	M50	M75	1
OSAJ 75 / M63(M)*M75(F)	Brass	50065703	M63	M75	1

Cable Glands - EX

EX d - Brass, Earth Tags, OSET

Brass nickel-plated



OSET

Type	Colour	Code	Size	Qty
OSET 16 / M16	Brass	50065634	M16	1
OSET 20 / M20	Brass	50065635	M20	1
OSET 25 / M25	Brass	50065636	M25	1
OSET 32 / M32	Brass	50065637	M32	1
OSET 40 / M40	Brass	50065638	M40	1
OSET 50 / M50	Brass	50065639	M50	1
OSET 63 / M63	Brass	50065640	M63	1
OSET 75 / M75	Brass	50065641	M75	1

Cable Glands - EX

EX d - Plastic, Shrouds, Type A, OSSH-A

CR



OSSH-A

Type	Colour	Code	Suitable for Cable Glands	Qty
OSSH-A-16		50065626	OS-E1UF-U 16	1
OSSH-A-20		50065627	OS-E1UF-U 20	1
OSSH-A-25		50065628	OS-E1UF-U 25	1
OSSH-A-32		50065629	OS-E1UF-U 32	1
OSSH-A-40		50065630	OS-E1UF-U 40	1
OSSH-A-50		50065631	OS-E1UF-U 50	1
OSSH-A-63		50065632	OS-E1UF-U 63	1
OSSH-A-75		50065633	OS-E1UF-U 75	1

Cable Glands - EX

EX d - Plastic, Shrouds, Type B, OSSH-B

CR



OSSH-B


Type	Colour	Code	Suitable for Cable Glands	Qty
OSSH-B-16		50065642	OS-A2F-U 16	1
OSSH-B-20		50065643	OS-A2F-U 20	1
OSSH-B-25		50065644	OS-A2F-U 25	1
OSSH-B-32		50065645	OS-A2F-U 32	1
OSSH-B-40		50065646	OS-A2F-U 40	1
OSSH-B-50		50065647	OS-A2F-U 50	1
OSSH-B-63		50065648	OS-A2F-U 63	1
OSSH-B-75		50065649	OS-A2F-U 75	1

CABLE GLANDS - EX ACCESSORIES

Cable Glands - EX Accessories

Polyamide, Stop End, EX-EVSG

IP66 / IP68 (5 bar 30 min), Polyamide, gasket EPDM, temperature range -40°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



EX-EVSG

Type	Colour	Code	Size	Long Thread (mm)	Qty
EX-EVSG 12		10065300	M12	15	100
EX-EVSG 16		10065301	M16	15	100
EX-EVSG 20		10065302	M20	15	100
EX-EVSG 25		10065303	M25	15	100
EX-EVSG 32		10065304	M32	15	50
EX-EVSG 40		10065305	M40	15	30
EX-EVSG 50		10065306	M50	15	30
EX-EVSG 63		10065307	M63	15	30
EX-EVSG 75		10065308	M75	15	2

Cable Glands - EX Accessories

Polyamide, Stop End, LowTemp, EX-EVSG LT

IP66 / IP68 (5 bar 30 min), Polyamide, gasket silicone, low temperature -60°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



EX-EVSG LT

Type	Colour	Code	Size	Long Thread (mm)	Qty
EX-EVSG 12 LT		10109529	M12	15	100
EX-EVSG 16 LT		10109530	M16	15	100
EX-EVSG 20 LT		10109531	M20	15	100
EX-EVSG 25 LT		10109532	M25	15	100
EX-EVSG 32 LT		10109533	M32	15	50
EX-EVSG 40 LT		10109534	M40	15	30
EX-EVSG 50 LT		10109535	M50	15	30
EX-EVSG 63 LT		10109536	M63	15	30
EX-EVSG 75 LT		10109537	M75	15	2

Cable Glands - EX Accessories

Polyamide, Enlargement Adaptors, EX-KEM

IP66 / IP68 (5 bar 30 min), Polyamide, fibre reinforced, gasket EPDM, temperature range -40°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX




EX-KEM

Type	Colour	Code	Outer Thread	Inner Thread	Qty
EX-KEM 12/16		10064741	M12	M16	100
EX-KEM 16/20		10064742	M16	M20	100
EX-KEM 20/25		10064743	M20	M25	100
EX-KEM 25/32		10064744	M25	M32	100
EX-KEM 32/40		10064745	M32	M40	50
EX-KEM 40/50		10064746	M40	M50	25
EX-KEM 50/63		10064747	M50	M63	5

Cable Glands - EX Accessories

Polyamide, Reduction Adaptors, EX-KRM

IP66 / IP68 (5 bar 30 min), Polyamide, fibre reinforced, gasket EPDM, temperature range -40°C - 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



EX-KEM



Type	Colour	Code	Outer Thread	Inner Thread	Qty
EX-KRM 16/12		10064720	M16	M12	100
EX-KRM 20/12		10064721	M20	M12	100
EX-KRM 20/16		10064722	M20	M16	100
EX-KRM 25/12		10064723	M25	M12	100
EX-KRM 25/16		10064724	M25	M16	100
EX-KRM 25/20		10064725	M25	M20	100
EX-KRM 32/16		10064726	M32	M16	50
EX-KRM 32/20		10064727	M32	M20	50
EX-KRM 32/25		10064728	M32	M25	50
EX-KRM 40/20		10064729	M40	M20	25
EX-KRM 40/25		10064730	M40	M25	25
EX-KRM 40/32		10064731	M40	M32	25
EX-KRM 50/20		10064732	M50	M20	5
EX-KRM 50/25		10064733	M50	M25	5
EX-KRM 50/32		10064734	M50	M32	5
EX-KRM 50/40		10064735	M50	M40	5
EX-KRM 63/20		10064736	M63	M20	5
EX-KRM 63/25		10064737	M63	M25	5
EX-KRM 63/32		10064738	M63	M32	5
EX-KRM 63/40		10064739	M63	M40	5
EX-KRM 63/50		10064740	M63	M50	5

Cable Glands - EX Accessories

Polyamide, Adaptors, PG to Metric, EX-APM

IP66 / IP68 (5 bar 30 min), Polyamide, fibre reinforced, gasket EPDM, temperature range -40°C · 75°C, marking Ex eb / Ex tb, approval IECEx / ATEX



EX-APM - Form A




EX-APM - Form B

Type	Colour	Code	Outer Thread (PG)	Inner Thread (mm)	Form	Qty
EX-APM 7/12		10064748	PG 7	M12	A	25
EX-APM 7/16		10064749	PG 7	M16	A	25
EX-APM 9/12		10064750	PG 9	M12	A	25
EX-APM 9/16		10064751	PG 9	M16	A	25
EX-APM 9/20		10064752	PG 9	M20	A	25
EX-APM 11/16		10064753	PG 11	M16	A	25
EX-APM 11/20		10064754	PG 11	M20	A	25
EX-APM 11/25		10064755	PG 11	M25	A	25
EX-APM 13,5/16		10064756	PG 13.5	M16	A	25
EX-APM 13,5/20		10064757	PG 13.5	M20	A	25
EX-APM 13,5/25		10064758	PG 13.5	M25	A	25
EX-APM 16/20		10064759	PG 16	M20	A	25
EX-APM 16/25		10064760	PG 16	M25	A	25
EX-APM 16/32		10064761	PG 16	M32	A	25
EX-APM 21/20		10064762	PG 21	M20	B	10
EX-APM 21/25		10064763	PG 21	M25	A	10
EX-APM 21/32		10064764	PG 21	M32	A	10
EX-APM 21/40		10064765	PG 21	M40	A	10
EX-APM 29/20		10064766	PG 29	M20	B	10
EX-APM 29/25		10064767	PG 29	M25	B	10
EX-APM 29/32		10064768	PG 29	M32	B	10
EX-APM 29/40		10064769	PG 29	M40	A	10
EX-APM 29/50		10064770	PG 29	M50	A	10
EX-APM 36/20		10064771	PG 36	M20	B	10
EX-APM 36/25		10064772	PG 36	M25	B	10
EX-APM 36/32		10064773	PG 36	M32	B	10
EX-APM 36/40		10064774	PG 36	M40	B	10
EX-APM 36/50		10064775	PG 36	M50	A	10
EX-APM 36/63		10064776	PG 36	M63	A	10
EX-APM 42/20		10064777	PG 42	M20	B	5
EX-APM 42/25		10064778	PG 42	M25	B	5
EX-APM 42/32		10064779	PG 42	M32	B	5
EX-APM 42/40		10064780	PG 42	M40	B	5
EX-APM 42/50		10064781	PG 42	M50	A	5
EX-APM 42/63		10064782	PG 42	M63	A	5
EX-APM 48/20		10064783	PG 48	M20	B	5
EX-APM 48/25		10064784	PG 48	M25	B	5
EX-APM 48/32		10064785	PG 48	M32	B	5
EX-APM 48/40		10064786	PG 48	M40	B	5
EX-APM 48/50		10064787	PG 48	M50	B	5
EX-APM 48/63		10064788	PG 48	M63	A	5

Cable Glands - EX Accessories

Brass, Stop Ends with O-Ring, EX-EMVS

IP66 / IP68 (5 bar 30 min), Brass nickel-plated, gasket EPDM, temperature range -40°C · 120°C, marking Ex eb / Ex tb, approval IECEx / ATEX



EX-EMVS

Continued...

Type	Colour	Code	Size	Qty
EX-EMVS 12	Brass	10065331	M12	10
EX-EMVS 16	Brass	10065332	M16	10
EX-EMVS 20	Brass	10065333	M20	10
EX-EMVS 25	Brass	10065334	M25	10
EX-EMVS 32	Brass	10065335	M32	5
EX-EMVS 40	Brass	10065336	M40	5
EX-EMVS 50	Brass	10065337	M50	1
EX-EMVS 63	Brass	10065338	M63	1

Cable Glands - EX Accessories

Brass, Stop Ends with O-Ring, LowTemp, EX-EMVS LT

IP66 / IP68 (5 bar 30 min), Brass nickel-plated, gasket EPDM, low temperature -60°C · 120°C, marking Ex eb / Ex tb, approval IECEx / ATEX




EX-EMVS LT

Type	Colour	Code	Size	Qty
EX-EMVS 12 LT	Brass	10109790	M12	10
EX-EMVS 16 LT	Brass	10109791	M16	10
EX-EMVS 20 LT	Brass	10109792	M20	10
EX-EMVS 25 LT	Brass	10109559	M25	10
EX-EMVS 32 LT	Brass	10109793	M32	5
EX-EMVS 40 LT	Brass	10109794	M40	5
EX-EMVS 50 LT	Brass	10109795	M50	1
EX-EMVS 63 LT	Brass	10109796	M63	1

Cable Glands - EX Accessories

Brass, Stop Ends with O-Ring to DIN 89284, EX-VSM

IP66 / IP68 (5 bar 30 min), Brass, gasket EPDM, temperature range -40°C · 120°C, marking Ex eb / Ex tb, approval IECEx / ATEX



EX-VSM


Type	Colour	Code	Size	Qty
EX-VSM 18	Brass	10030200	M18	1
EX-VSM 20	Brass	10030201	M20	1
EX-VSM 24	Brass	10030202	M24	1
EX-VSM 25	Brass	10030203	M25	1
EX-VSM 30	Brass	10030204	M30	1
EX-VSM 32	Brass	10030205	M32	1
EX-VSM 20 Ni	Brass	10030211	M20	1
EX-VSM 24 Ni	Brass	10030208	M24	1
EX-VSM 25 Ni	Brass	10030206	M25	1

CABLE GLANDS - RAILWAY EN 45545

Cable Glands - Railway EN 45545

SPRINT - Plastic Cable Gland - ESKV RW

IP68 (5 bar 30 mins) / IP69, polyamide UL94-V0, gasket EPDM, temperature range -40°C - 100°C, glow wire test 960°C.




Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESKV 12 RW		10105492	M12	3 - 7	50
ESKV 16 RW		10105493	M16	4.5 - 10	50
ESKV 20 RW		10105494	M20	6 - 13	50
ESKV 25 RW		10105495	M25	9 - 17	50
ESKV 32 RW		10105496	M32	13 - 21	25
ESKV 40 RW		10105497	M40	16 - 28	10
ESKV 50 RW		10105498	M50	21 - 35	4
ESKV 63 RW		10105499	M63	34 - 48	3
ESKV 12 RW		10105810	M12	3 - 7	50
ESKV 16 RW		10105811	M16	4.5 - 10	50
ESKV 20 RW		10105812	M20	6 - 13	50
ESKV 25 RW		10105813	M25	9 - 17	50
ESKV 32 RW		10105814	M32	13 - 21	25
ESKV 40 RW		10105815	M40	16 - 28	10
ESKV 50 RW		10105816	M50	21 - 35	4
ESKV 63 RW		10105817	M63	34 - 48	3

Cable Glands - Railway EN 45545

SPRINT - Brass Cable Gland - EMSKV RW

IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket EPDM, temperature range -40°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 RW	Brass	10104293	M12	3 - 7	50
EMSKV 16 RW	Brass	10104294	M16	4.5 - 10	50
EMSKV 20 RW	Brass	10104296	M20	6 - 13	50
EMSKV 25 RW	Brass	10104297	M25	9 - 17	50
EMSKV 32 RW	Brass	10104298	M32	13 - 21	25
EMSKV 40 RW	Brass	10104299	M40	16 - 28	10
EMSKV 50 RW	Brass	10104300	M50	21 - 35	10
EMSKV 63 RW	Brass	10104301	M63	34 - 48	10
EMSKV 75 RW	Brass	10104302	M75	48 - 62	1

Cable Glands - Railway EN 45545

SPRINT - Brass Cable Gland - Long Thread EMSKV-L RW

IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket EPDM, temperature range -40°C - 100°C



Type	Colour	Code	Size	Thread Length (mm)	Clamping Range (mm)	Qty
EMSKV-L 12 RW	Brass	10106174	M12	12	3 - 7	50
EMSKV-L 16 RW	Brass	10106175	M16	12	4.5 - 10	50
EMSKV-L 20 RW	Brass	10106176	M20	12	6 - 13	50
EMSKV-L 25 RW	Brass	10106177	M25	12	9 - 17	50
EMSKV-L 32 RW	Brass	10106178	M32	15	13 - 21	25
EMSKV-L 40 RW	Brass	10106179	M40	15	16 - 28	10
EMSKV-L 50 RW	Brass	10106180	M50	15	21 - 35	10
EMSKV-L 63 RW	Brass	10106181	M63	15	34 - 48	10

Cable Glands - Railway EN 45545

SPRINT - Brass Cable Gland - LowTemp EMSKV LT RW

IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket silicone, low temperature -60°C - 100°C




Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 LT RW	Brass	10105823	M12	3 - 7	50
EMSKV 16 LT RW	Brass	10105824	M16	4.5 - 10	50
EMSKV 20 LT RW	Brass	10105825	M20	6 - 13	50
EMSKV 25 LT RW	Brass	10105826	M25	9 - 17	50
EMSKV 32 LT RW	Brass	10105827	M32	13 - 21	25
EMSKV 40 LT RW	Brass	10105828	M40	16 - 28	10

Cable Glands - Railway EN 45545

SPRINT - Brass Cable Gland - with Earthing Cones DIN 89345 EMSKV EMV-Z RW



IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket EPDM, earthing cones Brass chromium plated, temperature range -40°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 EMV-Z RW	Brass	10104303	M12	3 - 7	50
EMSKV 16 EMV-Z RW	Brass	10104304	M16	4.5 - 10	50
EMSKV 20 EMV-Z RW	Brass	10104305	M20	6 - 13	50
EMSKV 25 EMV-Z RW	Brass	10104306	M25	9 - 17	50
EMSKV 32 EMV-Z RW	Brass	10104307	M32	13 - 21	25
EMSKV 40 EMV-Z RW	Brass	10104308	M40	16 - 28	10
EMSKV 50 EMV-Z RW	Brass	10104309	M50	21 - 35	10
EMSKV 63 EMV-Z RW	Brass	10104310	M63	34 - 48	10
EMSKV 75 EMV-Z RW	Brass	10104311	M75	48 - 63	1

Cable Glands - Railway EN 45545


SPRINT - Brass Cable Gland - LowTemp with Earthing Cones DIN 89345 EMSKV LT EMV-Z RW
IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket silicone, earthing cones Brass chromium plated, low temperature -60°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSKV 12 LT EMV-Z RW	Brass	10105848	M12	3 - 7	50
EMSKV 16 LT EMV-Z RW	Brass	10105849	M16	4.5 - 10	50
EMSKV 20 LT EMV-Z RW	Brass	10105850	M20	6 - 13	50
EMSKV 25 LT EMV-Z RW	Brass	10105851	M25	9 - 17	50
EMSKV 32 LT EMV-Z RW	Brass	10105852	M32	13 - 21	25
EMSKV 40 LT EMV-Z RW	Brass	10105853	M40	16 - 28	10

Cable Glands - Railway EN 45545


SPRINT - Stainless Steel Cable Gland - ESSKV RW
IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket EPDM, temperature range -40°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 RW	Stainless Steel	10105832	M12	3 - 7	10
ESSKV 16 RW	Stainless Steel	10105833	M16	4.5 - 10	10
ESSKV 20 RW	Stainless Steel	10105834	M20	6 - 13	10
ESSKV 25 RW	Stainless Steel	10105835	M25	9 - 17	10
ESSKV 32 RW	Stainless Steel	10105836	M32	13 - 21	5
ESSKV 40 RW	Stainless Steel	10105837	M40	16 - 28	5
ESSKV 50 RW	Stainless Steel	10105838	M50	21 - 35	2
ESSKV 63 RW	Stainless Steel	10105839	M63	34 - 48	1

Cable Glands - Railway EN 45545


SPRINT - Stainless Steel Cable Gland - LowTemp ESSKV LT RW
IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket silicone, low temperature -60°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 LT RW	Stainless Steel	10105840	M12	3 - 7	10
ESSKV 16 LT RW	Stainless Steel	10105841	M16	4.5 - 10	10
ESSKV 20 LT RW	Stainless Steel	10105842	M20	6 - 13	10
ESSKV 25 LT RW	Stainless Steel	10105843	M25	9 - 17	10
ESSKV 32 LT RW	Stainless Steel	10105844	M32	13 - 21	5
ESSKV 40 LT RW	Stainless Steel	10105845	M40	16 - 28	5

Cable Glands - Railway EN 45545


SPRINT - Stainless Steel Cable Gland - with Earthing Cones DIN 89345 ESSKV EMV-Z RW
IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket EPDM, earthing cones Brass chromium-plated, temperature range -40°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 EMV-Z RW	Stainless Steel	10105857	M12	3 - 7	10
ESSKV 16 EMV-Z RW	Stainless Steel	10105858	M16	4.5 - 10	10
ESSKV 20 EMV-Z RW	Stainless Steel	10105859	M20	6 - 13	10
ESSKV 25 EMV-Z RW	Stainless Steel	10105860	M25	9 - 17	10
ESSKV 32 EMV-Z RW	Stainless Steel	10105861	M32	13 - 21	5
ESSKV 40 EMV-Z RW	Stainless Steel	10105862	M40	16 - 28	5
ESSKV 50 EMV-Z RW	Stainless Steel	10105863	M50	21 - 35	2
ESSKV 63 EMV-Z RW	Stainless Steel	10105864	M63	34 - 48	1

Cable Glands - Railway EN 45545


SPRINT - Stainless Steel Cable Gland - LowTemp with Earthing Cones DIN 89345 ESSKV LT EMV-Z RW
IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket silicone, earthing cones Brass chromium-plated, low temperature -60°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSKV 12 LT EMV-Z RW	Stainless Steel	10105865	M12	3 - 7	10
ESSKV 16 LT EMV-Z RW	Stainless Steel	10105866	M16	4.5 - 10	10
ESSKV 20 LT EMV-Z RW	Stainless Steel	10105867	M20	6 - 13	10
ESSKV 25 LT EMV-Z RW	Stainless Steel	10105868	M25	9 - 17	10
ESSKV 32 LT EMV-Z RW	Stainless Steel	10105869	M32	13 - 21	5
ESSKV 40 LT EMV-Z RW	Stainless Steel	10105870	M40	16 - 28	5

Cable Glands - Railway EN 45545


SPRINT - Breathable Brass Cable Gland - VentGLAND EMSVG RW
IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, membrane ePTFE, temperature range -40°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMVSG 16 RW	Brass	10105873	M16	4.5 - 10	1
EMVSG 20 RW	Brass	10105874	M20	6 - 13	1
EMVSG 25 RW	Brass	10105875	M25	9 - 17	1
EMVSG 32 RW	Brass	10105876	M32	13 - 21	1
EMVSG 40 RW	Brass	10105877	M40	16 - 28	1
EMSVG 50 RW	Brass	10105878	M50	21 - 35	1
EMSVG 63 RW	Brass	10105879	M63	34 - 48	1

Cable Glands - Railway EN 45545

SPRINT - Breathable Brass Cable Gland - LowTemp VentGLAND EMSVG LT RW
IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket silicone, membrane ePTFE, low temperature -60°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMVSG 16 LT RW	Brass	10105880	M16	4.5 - 10	1
EMVSG 20 LT RW	Brass	10105881	M20	6 - 13	1
EMVSG 25 LT RW	Brass	10105882	M25	9 - 17	1
EMVSG 32 LT RW	Brass	10105883	M32	13 - 21	1
EMVSG 40 LT RW	Brass	10105884	M40	16 - 28	1
EMVSG 50 LT RW	Brass	10105885	M50	21 - 35	1
EMVSG 63 LT RW	Brass	10105886	M63	34 - 48	1

Cable Glands - Railway EN 45545


SPRINT - Breathable Brass Cable Gland - with Earthing Cones DIN 89345 VentGLAND EMSVG EMV-Z RW
IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket EPDM, membrane ePTFE, earthing cones Brass chromium-plated, temperature range -40°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMVSG 16 EMV-Z RW	Brass	10105887	M16	4.5 - 10	1
EMVSG 20 EMV-Z RW	Brass	10105888	M20	6 - 13	1
EMVSG 25 EMV-Z RW	Brass	10105889	M25	9 - 17	1
EMVSG 32 EMV-Z RW	Brass	10105890	M32	13 - 21	1
EMVSG 40 EMV-Z RW	Brass	10105891	M40	16 - 28	1
EMVSG 50 EMV-Z RW	Brass	10105892	M50	21 - 35	1
EMVSG 63 EMV-Z RW	Brass	10105893	M63	34 - 48	1

Cable Glands - Railway EN 45545

SPRINT - Breathable Brass Cable Gland - LowTemp with Earthing Cones DIN 89345 VentGLAND EMSVG LT EMV-Z RW
IP68 (5 bar 30 mins) / IP69, brass nickel-plated gland, clamping cage polyamide UL94-V0, gasket EPDM, membrane ePTFE, earthing cones Brass chromium-plated, low temperature -60°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMVSG 16 LT EMV-Z RW	Brass	10105894	M16	4.5 - 10	1
EMVSG 20 LT EMV-Z RW	Brass	10105895	M20	6 - 13	1

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMVSG 25 LT EMV-Z RW	Brass	10105896	M25	9 - 17	1
EMVSG 32 LT EMV-Z RW	Brass	10105897	M32	13 - 21	1
EMVSG 40 LT EMV-Z RW	Brass	10105898	M40	16 - 28	1
EMVSG 50 LT EMV-Z RW	Brass	10105899	M50	21 - 35	1
EMVSG 63 LT EMV-Z RW	Brass	10105900	M63	34 - 48	1

Cable Glands - Railway EN 45545


SPRINT - Breathable Stainless Steel Cable Gland - VentGLAND ESSVG RW
IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket EPDM, membrane ePTFE, temperature range -40°C - 100°C



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG 16 RW	Stainless Steel	10105901	M16	4.5 - 10	1
ESSVG 20 RW	Stainless Steel	10105902	M20	6 - 13	1
ESSVG 25 RW	Stainless Steel	10105903	M25	9 - 17	1
ESSVG 32 RW	Stainless Steel	10105904	M32	13 - 21	1
ESSVG 40 RW	Stainless Steel	10105905	M40	16 - 28	1
ESSVG 50 RW	Stainless Steel	10105906	M50	21 - 35	1
ESSVG 63 RW	Stainless Steel	10105907	M63	34 - 48	1

Cable Glands - Railway EN 45545

SPRINT - Breathable Stainless Steel Cable Gland - LowTemp VentGLAND ESSVG LT RW
IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket silicone, membrane ePTFE, low temperature -60°C - 100°C




Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG 16 LT RW	Stainless Steel	10105908	M16	4.5 - 10	1
ESSVG 20 LT RW	Stainless Steel	10105909	M20	6 - 13	1
ESSVG 25 LT RW	Stainless Steel	10105910	M25	9 - 17	1
ESSVG 32 LT RW	Stainless Steel	10105911	M32	13 - 21	1
ESSVG 40 LT RW	Stainless Steel	10105912	M40	16 - 28	1
ESSVG 50 LT RW	Stainless Steel	10105913	M50	21 - 35	1
ESSVG 63 LT RW	Stainless Steel	10105914	M63	34 - 48	1

Cable Glands - Railway EN 45545

SPRINT - Breathable Stainless Steel Cable Gland - with Earthing Cones DIN 89345 VentGLAND

ESSVG EMV-Z RW

IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket silicone, membrane ePTFE, earthing cones brass-chromium-plated, temperature range -40°C - 100°C




Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG 20 EMV-Z RW	Stainless Steel	10105915	M20	6 - 13	1
ESSVG 25 EMV-Z RW	Stainless Steel	10105916	M25	9 - 17	1
ESSVG 32 EMV-Z RW	Stainless Steel	10105917	M32	13 - 21	1
ESSVG 40 EMV-Z RW	Stainless Steel	10105918	M40	16 - 28	1
ESSVG 50 EMV-Z RW	Stainless Steel	10105919	M50	21 - 35	1
ESSVG 63 EMV-Z RW	Stainless Steel	10105920	M63	34 - 48	1

Cable Glands - Railway EN 45545

SPRINT - Breathable Stainless Steel Cable Gland - LowTemp with Earthing Cones DIN 89345

VentGLAND ESSVG LT EMV-Z RW

IP68 (5 bar 30 mins) / IP69, stainless steel A2 (1.4305) gland, clamping cage polyamide UL94-V0, gasket silicone, membrane ePTFE, earthing cones brass-chromium-plated, low temperature -60°C - 100°C




Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG 20 LT EMV-Z RW	Stainless Steel	10105921	M20	6 - 13	1
ESSVG 25 LT EMV-Z RW	Stainless Steel	10105922	M25	9 - 17	1
ESSVG 32 LT EMV-Z RW	Stainless Steel	10105923	M32	13 - 21	1
ESSVG 40 LT EMV-Z RW	Stainless Steel	10105924	M40	16 - 28	1
ESSVG 50 LT EMV-Z RW	Stainless Steel	10105925	M50	21 - 35	1
ESSVG 63 LT EMV-Z RW	Stainless Steel	10105926	M63	34 - 48	1

Cable Glands - Railway EN 45545

SPRINT - Sealing Inserts - Multiple Sealing Insert MFD RW

IP66 / IP68, thermoplastic elastomer, temperature range -40°C - 100°C



Type	Colour	Code	Suitable for Cable Gland Size	No. of Insert Entries	Cable Entry Size (mm)	Qty
MFD 12/02/020 RW		10105927	M12	2	1 - 2	25
MFD 12/04/020 RW		10105928	M12	4	1.5 - 2	25
MFD 16/02/040 RW		10105929	M16	2	2 - 4	25
MFD 16/03/021 RW		10105930	M16	3	1 - 2.1	25
MFD 20/02/050 RW		10105931	M20	2	3 - 5	25
MFD 20/02/055 RW		10110790	M20	2	3.5 - 5.5	25

Continued...

Type	Colour	Code	Suitable for Cable Gland Size	No. of Insert Entries	Cable Entry Size (mm)	Qty
MFD 20/02/060 RW		10110039	M20	2	4 - 6	25
MFD 20/02/065 RW		10109912	M20	2	4.5 - 6.5	25
MFD 20/03/040 RW		10105932	M20	3	2 - 4	25
MFD 20/04/047 RW		10110482	M20	4	2.7 - 4.7	25
MFD 25/02/060 RW		10110015	M25	2	4 - 6	25
MFD 25/02/070 RW		10105549	M25	2	5 - 7	25
MFD 25/02/080 RW		10105548	M25	2	6 - 8	25
MFD 25/01/094-01/058 RW		10110521	M25	2	3.8 - 9.4	25
MFD 25/03/060 RW		10106734	M25	3	4 - 6	25
MFD 25/03/070 RW		10106735	M25	3	5 - 7	25
MFD 25/02/070-01/040 RW		10105550	M25	3	3 - 7	25
MFD 25/04/040 RW		10109456	M25	4	2 - 4	25
MFD 25/04/060 RW		10108069	M25	4	4 - 6	25
MFD 25/06/047 RW		10110483	M25	6	2.7 - 4.7	25
MFD 32/02/100 RW		10109542	M32	2	8 - 10	25
MFD 32/01/115-01/050 RW		10105553	M32	2	4 - 11.5	25
MFD 32/03/065 RW		10110522	M32	3	4.5 - 6.5	25
MFD 32/03/080 RW		10105552	M32	3	6 - 8	25
MFD 32/03/090 RW		10109524	M32	3	7 - 9	25
MFD 32/04/070 RW		10109539	M32	4	5 - 7	25
MFD 32/04/080 RW		10105547	M32	4	6 - 8	25
MFD 32/06/060 RW		10110507	M32	6	4 - 6	25
MFD 40/01/095-01/145 RW		10110533	M40	2	7.5 - 14.5	25
MFD 40/03/125 RW		10110538	M40	3	10.5 - 12.5	25
MFD 40/02/120-01/070 RW		10105546	M40	3	7 - 12	25
MFD 40/02/100-01/115 RW		10109543	M40	3	8 - 11.5	25
MFD 40/02/105-01/125 RW		10110535	M40	10	8.5 - 12.5	25
MFD 40/04/100 RW		10105933	M40	4	8 - 10	25
MFD 40/04/110 RW		10110537	M40	4	9 - 11	25
MFD 40/03/100-01/080 RW		10109486	M40	4	8 - 10	25
MFD 40/02/065-02/070 RW		10110529	M40	10	4.5 - 7	25
MFD 40/05/090 RW		10110527	M40	5	7 - 9	25
MFD 40/05/095 RW		10110534	M40	5	7.5 - 9.5	25
MFD 40/03/086-02/100 RW		10110532	M40	5	6.6 - 10	25
MFD 40/04/090-01/115 RW		10110536	M40	5	7 - 11.5	25
MFD 40/06/090 RW		10110477	M40	6	7 - 9	25
MFD 40/07/070 RW		10105934	M40	7	5 - 7	25
MFD 40/07/080 RW		10110530	M40	7	6 - 8	25
MFD 40/04/055-03/095 RW		10110526	M40	7	3.5 - 9.5	25
MFD 40/02/086-05/070 RW		10110531	M40	7	5 - 8.6	25
MFD 40/09/069 RW		10110523	M40	9	4.9 - 6.9	25
MFD 40/10/064 RW		10110528	M40	10	4.4 - 6.4	25
MFD 40/16/035 RW		10110478	M40	16	2.5 - 3.5	25
MFD 40/26/035 RW		10110485	M40	26	2.5 - 3.5	25
MFD 50/03/157 RW		10110479	M50	3	13.7 - 15.7	25
MFD 50/04/120 RW		10106726	M50	4	10 - 12	25
MFD 50/03/116-02/122 RW		10110543	M50	5	9.6 - 12.2	25
MFD 50/05/112-01/104 RW		10110542	M50	6	8.4 - 11.2	25
MFD 50/07/101 RW		10110541	M50	7	8.1 - 10.1	25
MFD 50/04/081-03/091 RW		10110540	M50	7	6.1 - 9.1	25
MFD 50/08/090 RW		10110497	M50	8	7 - 9	25
MFD 50/09/075 RW		10110480	M50	9	5.5 - 7.5	25
MFD 50/09/080 RW		10105935	M50	9	6 - 8	25
MFD 50/10/070 RW		10110539	M50	10	5 - 7	25
MFD 50/16/060 RW		10110481	M50	16	4 - 6	25
MFD 50/25/050 RW		10105936	M50	25	4 - 5	25
MFD 50/37/035 RW		10110498	M50	37	2.5 - 3.5	25
MFD 63/03/065 RW		10105937	M63	3	4.5 - 6.5	25
MFD 75/03/220 RW		10105588	M75	3	20 - 22	25

CABLE GLANDS - VENTING

Cable Glands - Venting

SPRINT - VentGLAND, Polyamide, EN 62444, ESVG

IP68 (5 bar 30 mins) / IP69, polyamide cable gland, gasket EPDM, membrane ePTFE, temperature range -40°C - 100°C, glow wire test 750°C.



ESVG



Type	Colour	Code	Size	Clamping Range (mm)	Qty
EVSG 16		10104412	M16	4.5 - 10	1
EVSG 20		10060974	M20	6 - 13	1
EVSG 25		10100666	M25	9 - 17	1
EVSG 32		10100801	M32	13 - 21	1
EVSG 40		10102471	M40	16 - 28	1
EVSG 16		10104413	M16	4.5 - 10	1
EVSG 20		10060802	M20	6 - 13	1
EVSG 25		10100667	M25	9 - 17	1
EVSG 32		10100802	M32	13 - 21	1
EVSG 40		10102472	M40	16 - 28	1

Cable Glands - Venting

SPRINT - VentGLAND, Brass, EN 62444, EMSVG

IP68 (5 bar 30 mins) / IP69, Brass nickel-plated cable gland, gasket EPDM, clamping cage Polyamide, membrane ePTFE, temperature range -40°C - 100°C




EMSVG

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMVSG 16	Brass	10065899	M16	4.5 - 10	1
EMVSG 20	Brass	10065900	M20	6 - 13	1
EMVSG 25	Brass	10065901	M25	9 - 17	1
EMVSG 32	Brass	10065902	M32	13 - 21	1
EMVSG 40	Brass	10065903	M40	16 - 28	1
EMSVG 50	Brass	10065904	M50	21 - 35	1
EMSVG 63	Brass	10065905	M63	34 - 48	1

Cable Glands - Venting

SPRINT - VentGLAND, Stainless Steel A2 (1.4305), EN 62444, ESSVG IP68 (5 bar 30 mins) / IP69, Stainless Steel A2 (1.4305) cable gland, gasket EPDM, clamping cage Polyamide, membrane ePTFE, temperature range -40°C - 100°C



ESSVG

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG 16	Stainless Steel	10104410	M16	4.5 - 10	1
ESSVG 20	Stainless Steel	10069400	M20	6 - 13	1
ESSVG 25	Stainless Steel	10069401	M25	9 - 17	1
ESSVG 32	Stainless Steel	10069402	M32	13 - 21	1
ESSVG 40	Stainless Steel	10069403	M40	16 - 28	1
ESSVG 50	Stainless Steel	10069404	M50	21 - 35	1
ESSVG 63	Stainless Steel	10069405	M63	34 - 48	1

Cable Glands - Venting

SPRINT - VentGLAND, Stainless Steel A4 (1.4404), EN 62444, ESSVG-4 IP68 (5 bar 30 mins) / IP69, Stainless Steel A4 (1.4404) cable gland, gasket EPDM, clamping cage Polyamide, membrane ePTFE, temperature range -40°C - 100°C



ESSVG-4

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG-4 16	Stainless Steel	10104411	M16	4.5 - 10	1
ESSVG-4 20	Stainless Steel	10069500	M20	6 - 13	1
ESSVG-4 25	Stainless Steel	10069501	M25	9 - 17	1
ESSVG-4 32	Stainless Steel	10069502	M32	13 - 21	1
ESSVG-4 40	Stainless Steel	10069503	M40	16 - 28	1
ESSVG-4 50	Stainless Steel	10069504	M50	21 - 35	1
ESSVG-4 63	Stainless Steel	10069505	M63	34 - 48	1

Cable Glands - Venting

SPRINT - VentGLAND, Brass, with Contact Spring Insert, EN 62444, EMSVG EMV-S IP68 (5 bar 30 mins) / IP69, Brass nickel-plated cable gland, gasket EPDM, clamping cage Polyamide, membrane ePTFE, earthing cones stainless steel 1.4310, temperature range -40°C - 100°C



EMSVG EMV-S

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSVG 20 EMV-S	Brass	10102715	M20	6 - 13	1
EMSVG 25 EMV-S	Brass	10102716	M25	9 - 17	1

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSVG 32 EMV-S	Brass	10102717	M32	13 - 21	1
EMSVG 40 EMV-S	Brass	10102718	M40	16 - 28	1
EMSVG 50 EMV-S	Brass	10102719	M50	21 - 35	1
EMSVG 63 EMV-S	Brass	10102720	M63	34 - 48	1

Cable Glands - Venting

SPRINT - VentGLAND, Brass, with Earthing Cones DIN 89345, EN 62444, EMSVG EMV-Z
IP68 (5 bar 30 mins) / IP69, Brass nickel-plated cable gland, gasket EPDM, clamping cage Polyamide, membrane ePTFE, Earthing cones Brass chromium-plated, temperature range -40°C - 100°C



EMSVG EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMSVG 16 EMV-Z	Brass	10065994	M16	4.5 - 10	1
EMSVG 20 EMV-Z	Brass	10065906	M20	6 - 13	1
EMSVG 25 EMV-Z	Brass	10065907	M25	9 - 17	1
EMSVG 32 EMV-Z	Brass	10065908	M32	13 - 21	1
EMSVG 40 EMV-Z	Brass	10065909	M40	16 - 28	1
EMSVG 50 EMV-Z	Brass	10065910	M50	21 - 35	1
EMSVG 63 EMV-Z	Brass	10065911	M63	34 - 48	1

Cable Glands - Venting

SPRINT - VentGLAND, Stainless Steel A2 (1.4305), with Earthing Cones DIN 89345, EN 62444, ESSVG EMV-Z
IP68 (5 bar 30 mins) / IP69, Stainless Steel A2 (1.4305) cable gland, gasket EPDM, clamping cage Polyamide, membrane ePTFE, Earthing cones Brass chromium-plated, temperature range -40°C - 100°C



ESSVG EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG 20 EMV-Z	Stainless Steel	10069406	M20	6 - 13	1
ESSVG 25 EMV-Z	Stainless Steel	10069407	M25	9 - 17	1
ESSVG 32 EMV-Z	Stainless Steel	10069408	M32	13 - 21	1
ESSVG 40 EMV-Z	Stainless Steel	10069409	M40	16 - 28	1
ESSVG 50 EMV-Z	Stainless Steel	10069410	M50	21 - 35	1
ESSVG 63 EMV-Z	Stainless Steel	10069411	M63	34 - 48	1

Cable Glands - Venting

SPRINT - VentGLAND, Stainless Steel A4 (1.4404), with Earthing Cones DIN 89345, EN 62444, ESSVG-4 EMV-Z
IP68 (5 bar 30 mins) / IP69, Stainless Steel A4 (1.4404) cable gland, gasket EPDM, clamping cage Polyamide, membrane ePTFE, Earthing cones Brass chromium-plated, temperature range -40°C - 100°C



EMSVG-4 EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
ESSVG-4 20 EMV-Z	Stainless Steel	10069506	M20	6 - 13	1
ESSVG-4 25 EMV-Z	Stainless Steel	10069507	M25	9 - 17	1
ESSVG-4 32 EMV-Z	Stainless Steel	10069508	M32	13 - 21	1
ESSVG-4 40 EMV-Z	Stainless Steel	10069509	M40	16 - 28	1
ESSVG-4 50 EMV-Z	Stainless Steel	10069510	M50	21 - 35	1
ESSVG-4 63 EMV-Z	Stainless Steel	10069511	M63	34 - 48	1

Cable Glands - Venting

SPRINT - VentPLUG, Polyamide, EVPS
IP68 (5 bar 30 mins) / IP69, Polyamide, gasket EPDM, membrane ePTFE, temperature range -40°C - 100°C, glow wire test 750°C
Airflow at 70 bar = 22LH



EVPS



Type	Colour	Code	Size	Airflow	Thread Length (mm)	Qty
EVPS 12		10102369	M12	22LH	8	10
EVPS 20		10106591	M20	110LH	9	10
EVPS-L 20 (Long Thread)		10106592	M20	110LH	15	10
EVPS 40		10106593	M40	660LH	9	10
EVPS-L 40 (Long Thread)		10106594	M40	660LH	18	10
EVPS 12		10102370	M12	22LH	8	10
EVPS 20		10106595	M20	110LH	9	10
EVPS-L 20 (Long Thread)		10106596	M20	110LH	15	10
EVPS 40		10106597	M40	660LH	9	10
EVPS-L 40 (Long Thread)		10106598	M40	660LH	18	10

Cable Glands - Venting

SPRINT - VentPLUG, Polyamide, High Air Flow, EVPS HF
IP68 (5 bar 30 mins) / IP69, Polyamide, gasket TPE, membrane ePTFE HF, temperature range -40°C - 100°C, glow wire test 750°C
Airflow at 70 bar = 34LH



EVPS

Type	Colour	Code	Size	Airflow	Thread Length (mm)	Qty
EVPS HF 12		10103263	M12	34LH	8	10
EVPS HF 20		10106615	M20	280LH	9	10
EVPS-L HF 20 (Long Thread)		10106616	M20	280LH	15	10
EVPS HF 40		10106617	M40	1650LH	9	10
EVPS-L HF 40 (Long Thread)		10106618	M40	1650LH	18	10

Type	Colour	Code	Size	Airflow	Thread Length (mm)	Qty
EVPS 12		10103264	M12	34LH	8	10
EVPS 20		10106619	M20	280LH	9	10
EVPS-L 20 (Long Thread)		10106620	M20	280LH	15	10
EVPS 40		10106621	M40	1650LH	9	10
EVPS-L 40 (Long Thread)		10106622	M40	1650LH	18	10

Cable Glands - Venting
SPRINT - VentPLUG, Brass, EMVPS
 IP68 (5 bar 30 mins) / IP69, Brass nickel-plated, gasket EPDM, clamping cage polyamide, membrane ePTFE, temperature range -40°C · 100°C
 Airflow at 70 bar = 22LH



EMVPS

Type	Colour	Code	Size	Qty
EMVPS 12	Brass	10103265	M12	10

Cable Glands - Venting
SPRINT - VentPLUG, Brass, High Air Flow, EMVPS HF
 IP68 (5 bar 30 mins) / IP69, Brass nickel-plated, gasket silicone, clamping cage polyamide, membrane ePTFE HF, temperature range -40°C · 100°C
 Airflow at 70 bar = 34LH



EMVPS HF

Type	Colour	Code	Size	Qty
EMVPS 12 HF	Brass	10103266	M12	10

Cable Glands - Venting
EDPS - DrainPLUG
 IP66 brass nickel-plated gland, polypropylene gasket, PE membrane, emperature range -30°C · 60°C, water flow rate 500 ml/hr



EDPS

Type	Colour	Code	Size	Qty
EDPS-MN 20	Brass	10111161	M20	1

CABLE GLANDS - COMPRESSION

Cable Glands - Compression
ShotGLAND, Brass, EN 62444, EMCGV
 IP68 (5 bar 30 mins), Gland Brass nickel-plated, gasket EPDM, temperature range -40°C · 120°C



EMCGV

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 8-030	Brass	10106389	M8	2 · 3.3	50
EMCGV 8-040	Brass	10106390	M8	3 · 4.3	50

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 8-050	Brass	10106391	M8	4 · 5.3	50
EMCGV 12-030	Brass	10106392	M12	2 · 3	50
EMCGV 12-050	Brass	10106393	M12	3 · 5	50
EMCGV 12-070	Brass	10106394	M12	5 · 7	50
EMCGV 12-090	Brass	10106395	M12	7 · 9	50
EMCGV 16-040	Brass	10106396	M16	2 · 4	50
EMCGV 16-060	Brass	10106397	M16	4 · 6	50
EMCGV 16-080	Brass	10106398	M16	6 · 8	50
EMCGV 16-100	Brass	10106399	M16	8 · 10	50
EMCGV 16-120	Brass	10106400	M16	10 · 12	50
EMCGV 20-060	Brass	10106401	M20	4 · 6	50
EMCGV 20-080	Brass	10106402	M20	6 · 8	50
EMCGV 20-100	Brass	10106403	M20	8 · 10	50
EMCGV 20-120	Brass	10106404	M20	10 · 12	50
EMCGV 20-140	Brass	10106405	M20	12 · 14	50
EMCGV 20-160	Brass	10106406	M20	14 · 16	50
EMCGV 25-080	Brass	10106407	M25	6 · 8	50
EMCGV 25-100	Brass	10106408	M25	8 · 10	50
EMCGV 25-120	Brass	10106409	M25	10 · 12	50
EMCGV 25-140	Brass	10106410	M25	12 · 14	50
EMCGV 25-160	Brass	10106411	M25	14 · 16	50
EMCGV 25-170	Brass	10106412	M25	15 · 17	50
EMCGV 32-110	Brass	10106413	M32	9 · 11	25
EMCGV 32-130	Brass	10106414	M32	11 · 13	25
EMCGV 32-150	Brass	10106415	M32	13 · 15	25
EMCGV 32-180	Brass	10106416	M32	16 · 18	25
EMCGV 32-200	Brass	10106417	M32	18 · 20	25
EMCGV 32-230	Brass	10106419	M32	21 · 23	25
EMCGV 40-180	Brass	10106420	M40	16 · 18	10
EMCGV 40-200	Brass	10106421	M40	18 · 20	10
EMCGV 40-220	Brass	10106422	M40	20 · 22	10
EMCGV 40-240	Brass	10106423	M40	22 · 24	10
EMCGV 40-260	Brass	10106424	M40	24 · 26	10
EMCGV 40-290	Brass	10106425	M40	26 · 29	10
EMCGV 50-280	Brass	10106426	M50	26 · 28	10
EMCGV 50-300	Brass	10106427	M50	28 · 30	10
EMCGV 50-320	Brass	10106428	M50	30 · 32	10
EMCGV 50-340	Brass	10106429	M50	32 · 34	10
EMCGV 50-360	Brass	10106430	M50	34 · 36	10
EMCGV 50-380	Brass	10106431	M50	36 · 38	10
EMCGV 63-350	Brass	10106432	M63	33 · 35	10
EMCGV 63-380	Brass	10106433	M63	35 · 38	10
EMCGV 63-410	Brass	10106434	M63	38 · 41	10
EMCGV 63-440	Brass	10106435	M63	41 · 44	10
EMCGV 63-470	Brass	10106436	M63	44 · 47	10
EMCGV 63-490	Brass	10106437	M63	47 · 49	10

Cable Glands - Compression
ShotGLAND, Brass, EN 62444, LowTemp, EMCGV LT
 IP68 (5 bar 30 mins), Gland Brass nickel-plated, gasket silicone, low temperature -60°C · 180°C



EMCGV LT

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 8-030 LT	Brass	10106492	M8	2 · 3.3	50
EMCGV 8-040 LT	Brass	10106493	M8	3 · 4.3	50
EMCGV 8-050 LT	Brass	10106494	M8	4 · 5.3	50
EMCGV 12-030 LT	Brass	10106495	M12	2 · 3	50
EMCGV 12-050 LT	Brass	10106496	M12	3 · 5	50
EMCGV 12-070 LT	Brass	10106497	M12	5 · 7	50

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 12-090 LT	Brass	10106498	M12	7 - 9	50
EMCGV 16-040 LT	Brass	10106499	M16	2 - 4	50
EMCGV 16-060 LT	Brass	10106500	M16	4 - 6	50
EMCGV 16-080 LT	Brass	10106501	M16	6 - 8	50
EMCGV 16-100 LT	Brass	10106502	M16	8 - 10	50
EMCGV 16-120 LT	Brass	10106503	M16	10 - 12	50
EMCGV 20-060 LT	Brass	10106504	M20	4 - 6	50
EMCGV 20-080 LT	Brass	10106505	M20	6 - 8	50
EMCGV 20-100 LT	Brass	10106506	M20	8 - 10	50
EMCGV 20-120 LT	Brass	10106507	M20	10 - 12	50
EMCGV 20-140 LT	Brass	10106508	M20	12 - 14	50
EMCGV 20-160 LT	Brass	10106509	M20	14 - 16	50
EMCGV 25-080 LT	Brass	10106510	M25	6 - 8	50
EMCGV 25-100 LT	Brass	10106511	M25	8 - 10	50
EMCGV 25-120 LT	Brass	10106512	M25	10 - 12	50
EMCGV 25-140 LT	Brass	10106513	M25	12 - 14	50
EMCGV 25-160 LT	Brass	10106514	M25	14 - 16	50
EMCGV 25-170 LT	Brass	10106515	M25	15 - 17	50
EMCGV 32-110 LT	Brass	10106516	M32	9 - 11	25
EMCGV 32-130 LT	Brass	10106517	M32	11 - 13	25
EMCGV 32-150 LT	Brass	10106518	M32	13 - 15	25
EMCGV 32-180 LT	Brass	10106519	M32	16 - 18	25
EMCGV 32-200 LT	Brass	10106520	M32	18 - 20	25
EMCGV 32-230 LT	Brass	10106522	M32	21 - 23	25
EMCGV 40-180 LT	Brass	10106523	M40	16 - 18	10
EMCGV 40-200 LT	Brass	10106524	M40	18 - 20	10
EMCGV 40-220 LT	Brass	10106525	M40	20 - 22	10
EMCGV 40-240 LT	Brass	10106526	M40	22 - 24	10
EMCGV 40-260 LT	Brass	10106527	M40	24 - 26	10
EMCGV 40-290 LT	Brass	10106528	M40	26 - 29	10
EMCGV 50-280 LT	Brass	10106529	M50	26 - 28	10
EMCGV 50-300 LT	Brass	10106530	M50	28 - 30	10
EMCGV 50-320 LT	Brass	10106589	M50	30 - 32	10
EMCGV 50-340 LT	Brass	10106531	M50	32 - 34	10
EMCGV 50-360 LT	Brass	10106532	M50	34 - 36	10
EMCGV 50-380 LT	Brass	10106533	M50	36 - 38	10
EMCGV 63-350 LT	Brass	10106534	M63	33 - 35	10
EMCGV 63-380 LT	Brass	10106535	M63	35 - 38	10
EMCGV 63-410 LT	Brass	10106536	M63	38 - 41	10
EMCGV 63-440 LT	Brass	10106537	M63	41 - 44	10
EMCGV 63-470 LT	Brass	10106538	M63	44 - 47	10
EMCGV 63-490 LT	Brass	10106539	M63	47 - 49	10

Cable Glands - Compression

ShotGLAND, Brass, Earthing Cones DIN 89345, EN 62444, EMCVG EMV-Z
 IP68 (5 bar 30 mins), Gland Brass nickel-plated, gasket EPDM, earthing cones Brass nickel-plated, temperature range -40°C - 120°C



EMCGV EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 8-030 EMV-Z	Brass	10106442	M8	2 - 3.3	50
EMCGV 8-040 EMV-Z	Brass	10106443	M8	3 - 4.3	50
EMCGV 8-050 EMV-Z	Brass	10106445	M8	4 - 5.3	50
EMCGV 12-030 EMV-Z	Brass	10106446	M12	2 - 3	50
EMCGV 12-050 EMV-Z	Brass	10106447	M12	3 - 5	50
EMCGV 12-070 EMV-Z	Brass	10106448	M12	5 - 7	50
EMCGV 12-090 EMV-Z	Brass	10106449	M12	7 - 9	50
EMCGV 16-040 EMV-Z	Brass	10106450	M16	2 - 4	50


Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 16-060 EMV-Z	Brass	10106451	M16	4 - 6	50
EMCGV 16-080 EMV-Z	Brass	10106452	M16	6 - 8	50
EMCGV 16-100 EMV-Z	Brass	10106453	M16	8 - 10	50
EMCGV 16-120 EMV-Z	Brass	10106454	M16	10 - 12	50
EMCGV 20-060 EMV-Z	Brass	10106455	M20	4 - 6	50
EMCGV 20-080 EMV-Z	Brass	10106456	M20	6 - 8	50
EMCGV 20-100 EMV-Z	Brass	10106457	M20	8 - 10	50
EMCGV 20-120 EMV-Z	Brass	10106458	M20	10 - 12	50
EMCGV 20-140 EMV-Z	Brass	10106459	M20	12 - 14	50
EMCGV 20-160 EMV-Z	Brass	10106460	M20	14 - 16	50
EMCGV 25-080 EMV-Z	Brass	10106461	M25	6 - 8	50
EMCGV 25-100 EMV-Z	Brass	10106462	M25	8 - 10	50
EMCGV 25-120 EMV-Z	Brass	10106463	M25	10 - 12	50
EMCGV 25-140 EMV-Z	Brass	10106464	M25	12 - 14	50
EMCGV 25-160 EMV-Z	Brass	10106465	M25	14 - 16	50
EMCGV 25-170 EMV-Z	Brass	10106466	M25	15 - 17	50
EMCGV 32-110 EMV-Z	Brass	10106467	M32	9 - 11	25
EMCGV 32-130 EMV-Z	Brass	10106468	M32	11 - 13	25
EMCGV 32-150 EMV-Z	Brass	10106469	M32	13 - 15	25
EMCGV 32-180 EMV-Z	Brass	10106470	M32	16 - 18	25
EMCGV 32-200 EMV-Z	Brass	10106471	M32	18 - 20	25
EMCGV 32-230 EMV-Z	Brass	10106473	M32	21 - 23	25
EMCGV 40-180 EMV-Z	Brass	10106474	M40	16 - 18	10
EMCGV 40-200 EMV-Z	Brass	10106475	M40	18 - 20	10
EMCGV 40-220 EMV-Z	Brass	10106476	M40	20 - 22	10
EMCGV 40-240 EMV-Z	Brass	10106477	M40	22 - 24	10
EMCGV 40-260 EMV-Z	Brass	10106478	M40	24 - 26	10
EMCGV 40-290 EMV-Z	Brass	10106479	M40	26 - 29	10
EMCGV 50-280 EMV-Z	Brass	10106480	M50	26 - 28	10
EMCGV 50-300 EMV-Z	Brass	10106481	M50	28 - 30	10
EMCGV 50-320 EMV-Z	Brass	10106482	M50	30 - 32	10
EMCGV 50-340 EMV-Z	Brass	10106483	M50	32 - 34	10
EMCGV 50-360 EMV-Z	Brass	10106484	M50	34 - 36	10
EMCGV 50-380 EMV-Z	Brass	10106485	M50	36 - 38	10
EMCGV 63-350 EMV-Z	Brass	10106486	M63	33 - 35	10
EMCGV 63-380 EMV-Z	Brass	10106487	M63	35 - 38	10
EMCGV 63-410 EMV-Z	Brass	10106488	M63	38 - 41	10
EMCGV 63-440 EMV-Z	Brass	10106489	M63	41 - 44	10
EMCGV 63-470 EMV-Z	Brass	10106490	M63	44 - 47	10
EMCGV 63-490 EMV-Z	Brass	10106491	M63	47 - 49	10

Cable Glands - Compression

ShotGLAND, Brass, Earthing Cones DIN 89345, EN 62444, LowTemp, EMCVG LT EMV-Z

IP68 (5 bar 30 mins), Gland Brass nickel-plated, gasket EPDM, earthing cones Brass nickel-plated, low temperature -60°C - 180°C



EMCGV LT EMV-Z

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 8-030 LT EMV-Z	Brass	10106540	M8	2 - 3.3	50
EMCGV 8-040 LT EMV-Z	Brass	10106541	M8	3 - 4.3	50
EMCGV 8-050 LT EMV-Z	Brass	10106542	M8	4 - 5.3	50
EMCGV 12-030 LT EMV-Z	Brass	10106543	M12	2 - 3	50
EMCGV 12-050 LT EMV-Z	Brass	10106544	M12	3 - 5	50
EMCGV 12-070 LT EMV-Z	Brass	10106545	M12	5 - 7	50
EMCGV 12-090 LT EMV-Z	Brass	10106546	M12	7 - 9	50
EMCGV 16-040 LT EMV-Z	Brass	10106547	M16	2 - 4	50
EMCGV 16-060 LT EMV-Z	Brass	10106548	M16	4 - 6	50
EMCGV 16-080 LT EMV-Z	Brass	10106549	M16	6 - 8	50

Continued...

Type	Colour	Code	Size	Clamping Range (mm)	Qty
EMCGV 16-100 LT EMV-Z	Brass	10106550	M16	8 - 10	50
EMCGV 16-120 LT EMV-Z	Brass	10106551	M16	10 - 12	50
EMCGV 20-060 LT EMV-Z	Brass	10106552	M20	4 - 6	50
EMCGV 20-080 LT EMV-Z	Brass	10106553	M20	6 - 8	50
EMCGV 20-100 LT EMV-Z	Brass	10106554	M20	8 - 10	50
EMCGV 20-120 LT EMV-Z	Brass	10106555	M20	10 - 12	50
EMCGV 20-140 LT EMV-Z	Brass	10106556	M20	12 - 14	50
EMCGV 20-160 LT EMV-Z	Brass	10106557	M20	14 - 16	50
EMCGV 25-080 LT EMV-Z	Brass	10106558	M25	6 - 8	50
EMCGV 25-100 LT EMV-Z	Brass	10106559	M25	8 - 10	50
EMCGV 25-120 LT EMV-Z	Brass	10106560	M25	10 - 12	50
EMCGV 25-140 LT EMV-Z	Brass	10106561	M25	12 - 14	50
EMCGV 25-160 LT EMV-Z	Brass	10106562	M25	14 - 16	50
EMCGV 25-170 LT EMV-Z	Brass	10106563	M25	15 - 17	50
EMCGV 32-110 LT EMV-Z	Brass	10106564	M32	9 - 11	25
EMCGV 32-130 LT EMV-Z	Brass	10106565	M32	11 - 13	25
EMCGV 32-150 LT EMV-Z	Brass	10106566	M32	13 - 15	25
EMCGV 32-180 LT EMV-Z	Brass	10106567	M32	16 - 18	25
EMCGV 32-200 LT EMV-Z	Brass	10106568	M32	18 - 20	25
EMCGV 32-230 LT EMV-Z	Brass	10106570	M32	21 - 23	25
EMCGV 40-180 LT EMV-Z	Brass	10106571	M40	16 - 18	10
EMCGV 40-200 LT EMV-Z	Brass	10106572	M40	18 - 20	10
EMCGV 40-220 LT EMV-Z	Brass	10106573	M40	20 - 22	10
EMCGV 40-240 LT EMV-Z	Brass	10106574	M40	22 - 24	10
EMCGV 40-260 LT EMV-Z	Brass	10106575	M40	24 - 26	10
EMCGV 40-290 LT EMV-Z	Brass	10106576	M40	26 - 29	10
EMCGV 50-280 LT EMV-Z	Brass	10106577	M50	26 - 28	10
EMCGV 50-300 LT EMV-Z	Brass	10106578	M50	28 - 30	10
EMCGV 50-320 LT EMV-Z	Brass	10106579	M50	30 - 32	10
EMCGV 50-340 LT EMV-Z	Brass	10106580	M50	32 - 34	10
EMCGV 50-360 LT EMV-Z	Brass	10106581	M50	34 - 36	10
EMCGV 50-380 LT EMV-Z	Brass	10106582	M50	36 - 38	10
EMCGV 63-350 LT EMV-Z	Brass	10106583	M63	33 - 35	10
EMCGV 63-380 LT EMV-Z	Brass	10106584	M63	35 - 38	10
EMCGV 63-410 LT EMV-Z	Brass	10106585	M63	38 - 41	10
EMCGV 63-440 LT EMV-Z	Brass	10106586	M63	41 - 44	10
EMCGV 63-470 LT EMV-Z	Brass	10106587	M63	44 - 47	10
EMCGV 63-490 LT EMV-Z	Brass	10106588	M63	47 - 49	10

SHIELDGLAND

Cable Glands - BW/CW

ShieldGLAND Pack

IP68, plastic armoured cable gland, no shroud required, suitable for armoured, SY / CY and non-armoured, complete with 2 x ShieldGLAND, 2 x locknut and 2 x earth tag.

ShieldGLAND



ShieldGLAND



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ShieldGLAND		10112390	M20	7 - 16	1
ShieldGLAND		10112391	M20L	12 - 21	1
ShieldGLAND		10112392	M25	17 - 28	1
ShieldGLAND		10112393	M32	24 - 36	1

Cable Glands - BW/CW

ShieldGLAND Pack Pro

IP68, plastic armoured cable gland, no shroud required, suitable for armoured, SY / CY and non-armoured, complete with 2 x ShieldGLAND, 2 x locknut, 2 x E-Spring and 2 x fly lead.

ShieldGLAND



ShieldGLAND Pro



Type	Colour	Code	Size	Clamping Range (mm)	Qty
ShieldGLAND		10112394	M20	7 - 16	1
ShieldGLAND		10112395	M20L	12 - 21	1
ShieldGLAND		10112396	M25	17 - 28	1
ShieldGLAND		10112397	M32	24 - 36	1

Cable Glands - BW/CE

ShieldGLAND Pack Elite

IP66 / IP67, COMBI 308 junction box with 5-pole terminal complete with 2 x ShieldGLAND M20 - plastic armoured cable gland, no shroud required, 2 x E-Spring and 2 x Earthing Lead.

RoHS Halogen COMBI ShieldGLAND



ShieldGLAND Elite



Type	Colour	Code	Description
COMBI 308/SG		10112398	Includes: 2 x ShieldGLAND M20 2 x E-Spring M20 2x Earthing Lead 5-pole terminal

CABLE GLANDS - BRITISH STANDARD BS 6121

Cable Glands - British Standard BS 6121

A2, Brass, BS EN 62444, BS 6121, A2

IP66/68 with nylon thread seal, brass gland, seals PCP, shrouds PVC, includes cable gland, brass locknut and LSF shroud, temperature range -80°C - 300°C

(additional earth tags available upon request)



A2

Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
A2-16	Brass	A2-16	M16	3.5 - 9	2
A2-20SS	Brass	A2-20SS	M20	3.5 - 9	2
A2-20S	Brass	A2-20S	M20	8 - 11.8	2
A2-20	Brass	A2-20	M20	11 - 13.8	2
A2-25	Brass	A2-25	M25	13 - 19.8	2
A2-32	Brass	A2-32	M32	19 - 26.4	2
A2-40	Brass	A2-40	M40	25 - 32.4	1
A2-50S	Brass	A2-50S	M50	31.5 - 38	1
A2-50	Brass	A2-50	M50	36.5 - 44	1
A2-63S	Brass	A2-63S	M63	42.5 - 49	1
A2-63	Brass	A2-63	M63	48.5 - 55.5	1
A2-75S	Brass	A2-75S	M75	54.5 - 62	1
A2-75	Brass	A2-75	M75	60.5 - 67	1
A2-82	Brass	A2-82	M82	66 - 72	1
A2-90	Brass	A2-90	M90	70 - 79	1

Cable Glands - British Standard BS 6121

BW Pack, Economy, Brass, BS 6121, BW

IP20, brass gland, includes locknut and shroud, temperature range -80°C - 300°C



BW



Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
BW 16L	Brass	BW 16L	M16	- 13.8	2
BW 20SS	Brass	BW 20SS	M20	- 13.8	2
BW 20S	Brass	BW 20S	M20	- 15.5	2
BW 20L	Brass	BW 20L	M20	- 18.3	2
BW 25L	Brass	BW 25L	M25	- 25.4	2
BW 32L	Brass	BW 32L	M32	- 32.2	2
BW 40L	Brass	BW 40L	M40	- 38.5	1
BW 50S	Brass	BW 50S	M50	- 45.0	1
BW 50L	Brass	BW 50L	M50	- 52.0	1
BW 63S	Brass	BW 63S	M63	- 59.0	1
BW 63L	Brass	BW 63L	M63	- 64.7	1
BW 75S	Brass	BW 75S	M75	- 70.0	1
BW 75L	Brass	BW 75L	M75	- 70.0	1
BW 90L	Brass	BW 90L	M90	- 90.0	1

Cable Glands - British Standard BS 6121

BW LSF Pack, Brass, BS 6121, Low Smoke Fumes, BW LSF

IP20, brass gland, includes locknut and LSF shroud, temperature range -80°C - 300°C



BW 16L/LSF	Brass	BW 16L/LSF	M16	- 13.8	2
BW 20SS/LSF	Brass	BW 20SS/LSF	M20	- 13.8	2
BW 20S/LSF	Brass	BW 20S/LSF	M20	- 15.5	2
BW 20L/LSF	Brass	BW 20L/LSF	M20	- 18.3	2
BW 25L/LSF	Brass	BW 25L/LSF	M25	- 25.4	2
BW 32L/LSF	Brass	BW 32L/LSF	M32	- 32.2	2
BW 40L/LSF	Brass	BW 40L/LSF	M40	- 38.5	1
BW 50S/LSF	Brass	BW 50S/LSF	M50	- 45.0	1
BW 50L/LSF	Brass	BW 50L/LSF	M50	- 52.0	1
BW 63S/LSF	Brass	BW 63S/LSF	M63	- 59.0	1
BW 63L/LSF	Brass	BW 63L/LSF	M63	- 64.7	1
BW 75S/LSF	Brass	BW 75S/LSF	M75	- 70.0	1
BW 75L/LSF	Brass	BW 75L/LSF	M75	- 70.0	1
BW 90L/LSF	Brass	BW 90L/LSF	M90	- 90.0	1

Cable Glands - British Standard BS 6121

BWP Pack, Premium, Brass, BS 6121, BW

IP20, brass gland, includes brass locknut and LSF shroud, temperature range -80°C - 300°C



BWP



Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
BWP 16L	Brass	BWP 16L	M16	- 13.8	2
BWP 20SS	Brass	BWP 20SS	M20	- 13.8	2
BWP 20S	Brass	BWP 20S	M20	- 15.8	2
BWP 20L	Brass	BWP 20L	M20	- 20.8	2
BWP 25L	Brass	BWP 25L	M25	- 27.5	2
BWP 32L	Brass	BWP 32L	M32	- 33.5	2
BWP 40L	Brass	BWP 40L	M40	- 40.9	1
BWP 50S	Brass	BWP 50S	M50	- 46.3	1
BWP 50L	Brass	BWP 50L	M50	- 52.6	1
BWP 63S	Brass	BWP 63S	M63	- 61.5	1
BWP 63L	Brass	BWP 63L	M63	- 65.3	1
BWP 75S	Brass	BWP 75S	M75	- 73.0	1
BWP 75L	Brass	BWP 75L	M75	- 78.0	1
BWP 90L	Brass	BWP 90L	M90	- 90.0	1

Cable Glands - British Standard BS 6121

BWL, Brass, BS 6121, Long Thread, BWL

IP20, brass gland, long thread includes brass locknut and LSF shroud, temperature range -80°C - 300°C




BWL

Type	Colour	Code	Size	Long Thread (mm)	Clamping Range (mm)	Qty (per pack)
BWL 20S	Brass	BWL 20S	M20	12	- 15.8	2
BWL 20L	Brass	BWL 20L	M20	12	- 20.8	2
BWL 25S	Brass	BWL 25S	M25	12	- 24.5	2
BWL 25L	Brass	BWL 25L	M25	12	- 27.5	2
BWL 32L	Brass	BWL 32L	M32	12	- 33.5	2
BWL 40S	Brass	BWL 40S	M40	17	- 39.5	1
BWL 40L	Brass	BWL 40L	M40	17	- 40.9	1
BWL 50S	Brass	BWL 50S	M50	17	- 46.3	1
BWL 50L	Brass	BWL 50L	M50	17	- 52.6	1
BWL 63S	Brass	BWL 63S	M63	17	- 61.5	1
BWL 63L	Brass	BWL 63L	M63	17	- 65.3	1
BWL 75S	Brass	BWL 75S	M75	22	- 73.0	1
BWL 75L	Brass	BWL 75L	M75	22	- 78.0	1
BWL90S	Brass	BWL90S	M90		- 84.0	1
BWL 90L	Brass	BWL 90L	M90		- 90.0	1

**Cable Glands - British Standard BS 6121
CW Pack, Economy, Brass, BS 6121, CW**

IP54 (IP66/68 with thread gasket), brass gland, includes locknut and shroud, temperature range -20°C - 80°C




CW

Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
CW 16L	Brass	CW 16L	M16	8.5 - 13.5	2
CW 20SS	Brass	CW 20SS	M20	8.5 - 13.5	2
CW 20S	Brass	CW 20S	M20	12.8 - 15.5	2
CW 20L	Brass	CW 20L	M20	15.5 - 19.5	2
CW 25S	Brass	CW 25S	M20	18.0 - 22.5	2
CW 25L	Brass	CW 25L	M25	22.0 - 26.5	2
CW 32L	Brass	CW 32L	M32	26.0 - 33.5	2
CW 40L	Brass	CW 40L	M40	33.0 - 39.5	1
CW 50S	Brass	CW 50S	M50	39.5 - 45.0	1
CW 50L	Brass	CW 50L	M50	45.0 - 52.0	1
CW 63S	Brass	CW 63S	M63	52.0 - 59.0	1
CW 63L	Brass	CW 63L	M63	59.0 - 66.0	1
CW 75S	Brass	CW 75S	M75	66.0 - 70.0	1
CW 75L	Brass	CW 75L	M75	70.0 - 78.0	1
CW 90L	Brass	CW 90L	M90	77.0 - 88.0	1

**Cable Glands - British Standard BS 6121
CW LSF Pack, Brass, BS 6121, Low Smoke Fumes, CW LSF**

IP54 (IP66/68 with thread gasket), brass gland, includes locknut and LSF shroud, temperature range -20°C - 80°C




CW LSF

Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
CW 16/LSF	Brass	CW 16/LSF	M16	8.5 - 13.5	2
CW 20SS/LSF	Brass	CW 20SS/LSF	M20	8.5 - 13.5	2
CW 20S/LSF	Brass	CW 20S/LSF	M20	12.8 - 15.5	2
CW 20L/LSF	Brass	CW 20L/LSF	M20	15.5 - 19.5	2
CW 25/LSF	Brass	CW 25/LSF	M25	22.0 - 26.5	2
CW 32L/LSF	Brass	CW 32L/LSF	M32	26.0 - 33.5	2
CW 40L/LSF	Brass	CW 40L/LSF	M40	33.0 - 39.5	1
CW 50S/LSF	Brass	CW 50S/LSF	M50	39.5 - 45.0	1
CW 50L/LSF	Brass	CW 50L/LSF	M50	45.0 - 52.0	1
CW 63S/LSF	Brass	CW 63S/LSF	M63	52.0 - 59.0	1
CW 63L/LSF	Brass	CW 63L/LSF	M63	59.0 - 66.0	1
CW 75S/LSF	Brass	CW 75S/LSF	M75	66.0 - 70.0	1
CW 75L/LSF	Brass	CW 75L/LSF	M75	70.0 - 78.0	1
CW 90L/LSF	Brass	CW 90L/LSF	M90	77.0 - 88.0	1

**Cable Glands - British Standard BS 6121
CWP Pack, Premium, Brass, BS 6121, CWP**

IP66/68, brass gland, includes brass locknut and LSF shroud, sealing washer, temperature range -20°C - 80°C



CWP

Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
CWP 16L	Brass	CWP 16L	M16	8.4 - 13.8	2
CWP 20SS	Brass	CWP 20SS	M20	8.4 - 13.8	2
CWP 20S	Brass	CWP 20S	M20	12.9 - 15.8	2
CWP 20L	Brass	CWP 20L	M20	15.5 - 20.8	2
CWP 25L	Brass	CWP 25L	M25	20.3 - 27.5	2
CWP 32L	Brass	CWP 32L	M32	26.7 - 33.5	2
CWP 40L	Brass	CWP 40L	M40	33.0 - 40.9	1
CWP 50S	Brass	CWP 50S	M50	39.4 - 46.3	1
CWP 50L	Brass	CWP 50L	M50	45.7 - 52.6	1
CWP 63S	Brass	CWP 63S	M63	52.1 - 61.5	1
CWP 63L	Brass	CWP 63L	M63	58.4 - 65.3	1
CWP 75S	Brass	CWP 75S	M75	64.8 - 73.0	1
CWP 75 L	Brass	CWP 75 L	M75	71.0 - 78.0	1
CWP 90L	Brass	CWP 90L	M90	81.0 - 90.0	1

**Cable Glands - British Standard BS 6121
CWA, CW Aluminium BS 62444:2013, ECWAL**

IP66/68, aluminium gland, includes aluminium locknut and LSF shroud, sealing washer, temperature range -20°C - 80°C



CWA

Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
CWA 16	Al	ECWAL16L	M16	8.4 - 13.8	2
CWA 20SS	Al	ECWAL20SS	M20	8.4 - 13.8	2
CWA 20S	Al	ECWAL20S	M20	12.9 - 15.8	2
CWA 20L	Al	ECWAL20L	M20	15.5 - 20.8	2
CWA 25L	Al	ECWAL25L	M25	20.3 - 27.5	2
CWA 32L	Al	ECWAL32L	M32	26.7 - 33.5	2
CWA 40L	Al	ECWAL40L	M40	33.0 - 40.9	1
CWA 50S	Al	ECWAL50S	M50	39.4 - 46.3	1
CWA 50L	Al	ECWAL50L	M50	45.7 - 52.6	1
CWA 63S	Al	ECWAL63S	M63	52.1 - 61.5	1
CWA 63L	Al	ECWAL63L	M63	58.4 - 65.3	1
CWA 75S	Al	ECWAL75S	M75	64.8 - 73.0	1
CWA 75L	Al	ECWAL75L	M75	71.0 - 78.0	1
CWA 82L	Al	ECWAL82L	M82	77.0 - 82.0	1
CWA 90L	Al	ECWAL90L	M90	81.0 - 90.0	1

Cable Glands - British Standard BS 6121

E1W, Premium, Brass, BS 6121, E1W

IP66/68, brass gland, includes brass locknut and shroud, sealing washer, temperature range -20°C - 80°C



E1W



Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
E1W 16	Brass	E1W 16	M16	8.4 - 13.8	2
E1W 20SS	Brass	E1W 20SS	M20	8.4 - 13.8	2
E1W 20S	Brass	E1W 20S	M20	12.9 - 15.8	2
E1W 20L	Brass	E1W 20L	M20	15.5 - 20.8	2
E1W 25	Brass	E1W 25	M25	20.3 - 27.5	2
E1W 32	Brass	E1W 32	M32	26.7 - 33.5	2
E1W 40	Brass	E1W 40	M40	33.0 - 40.9	1
E1W 50S	Brass	E1W 50S	M50	39.4 - 46.3	1
E1W 50L	Brass	E1W 50L	M50	45.7 - 52.6	1
E1W 63S	Brass	E1W 63S	M63	52.1 - 61.5	1
E1W 63L	Brass	E1W 63L	M63	58.4 - 65.3	1
E1W 75S	Brass	E1W 75S	M75	64.8 - 73.0	1
E1W 75L	Brass	E1W 75L	M75	71.0 - 78.0	1
E1W 90L	Brass	E1W 90L	M90	81.0 - 90.0	1

Cable Glands - British Standard BS 6121

CXT, Brass, BS 6121, EN 50262:1999, CXT

IP66/68, brass gland, LSF shroud, brass locknut for wire braided cables, sealing washer, temperature range -20°C - 80°C



CXT



Type	Colour	Code	Size	Clamping Range (mm)	Qty (per pack)
CXT20S	Brass	CXT20S	M20	7.0 - 11.6	2
CXT20L	Brass	CXT20L	M20	10.5 - 13.6	2
CXT25	Brass	CXT25	M25	12.5 - 19.8	2
CXT32	Brass	CXT32	M32	18.5 - 26.3	2
CXT40	Brass	CXT40	M40	25.0 - 32.1	1
CXT50	Brass	CXT50	M50	36.5 - 44.0	1
CXT63	Brass	CXT63	M63	48.5 - 55.0	1

Cable Glands - British Standard BS 6121

Threaded Gasket

NBR material, for use with CW, CXT, A2, CW, CWA and E1W glands to increase IP rating from IP54 to IP66.



ORD-N

Type	Colour	Code	Size	Qty
ORD-N 12		50108499	M12	1
ORD-N 16		50108500	M16	1
ORD-N 20		50108501	M20	1
ORD-N 25		50108502	M25	1
ORD-N 32		50108503	M32	1
ORD-N 40		50108504	M40	1
ORD-N 50		50108505	M50	1
ORD-N 63		50108506	M63	1
ORD-N 75		50108507	M75	1
ORD-N 90		50108508	M90	1

TAIL KIT SOLUTIONS


Tail Kit Solutions

SPRINT - Polyamide, 18th Edition Amendment 2 Compliant Tails Kit, TKE/P

IP68 (5 bar 30 min) / IP69, Polyamide gland, Gasket EPDM,

temperature range -40°C - 100°C, glow wire test 750°C

kit includes 1 x ESKV cable gland, 1 x EMUG locknut, insert and blind plug



TKE/P



Type	Colour	Code	Size	Number of Insert Entries	Suitable for Tail / Earth	Qty
TKE/P 32		10106242	M32	3	2 x 16mm / 1 x 10mm	1
TKE/P 40		10106244	M40	3	2 x 25mm / 1 x 16mm	1

Tail Kit Solutions

SPRINT - Polyamide, 18th Edition Amendment 2 Compliant Tails Kit, M32+ Wider Cable Gland Entry, TKE/P32+ Enlarged Entry

IP68 (5 bar 30 min) / IP69, Polyamide gland, Gasket EPDM,

temperature range -40°C - 100°C, glow wire test 750°C, kit includes

1 x ESKV M32+ cable gland (enlarged entry), 1 x EMUG locknut, insert and blind plug



TKE/P32+



Type	Colour	Code	Size	Number of Insert Entries	Suitable for Tail / Earth	Qty
TKE/P 32+		10111319	M32	3	2 x 25mm / 1 x 16mm	1
TKE/P 32+		10111658	M32	3	2 x 25mm / 1 x 16mm	1


Tail Kit Solutions

SPRINT - Polyamide, 18th Edition Amendment 2 Compliant Tails Kit with Enlarger, M32+ Wider Cable Gland Entry, TKE/P32+ EN

IP68 (5 bar 30 min) / IP69, Polyamide gland, Gasket EPDM,

temperature range -40°C - 100°C, glow wire test 750°C, kit includes

1 x ESKV M32+ cable gland (enlarged entry), 1 x M32 / M40 enlarger, 1 x EMUG locknut, insert and blind plug



TKE/P 32+ EN



Type	Colour	Code	Size	Number of Insert Entries	Suitable for Tail / Earth	Qty
TKE/P 32+ EN		10111665	M32 / M40 with Enlarger	3	2 x 25mm / 1 x 16mm	1
TKE/P 32+ EN		10111666	M32 / M40 with Enlarger	3	2 x 25mm / 1 x 16mm	1

About WISKA UK

Established in 2000, WISKA UK Ltd is the UK's market leader in the manufacture and supply of Junction Boxes, Cable Glands and Gel/ Gel Jointing products.

Our products are designed, developed and tested extensively, ensuring they meet the highest demands under the toughest of conditions. These tests are conducted by our team of highly skilled Designers and Engineers at our state of the art laboratory facilities in WISKA Germany.

These same exacting standards are applied to service at WISKA UK Ltd. With a wealth of product knowledge, our team can help support you in providing quality solutions for your business, project or requirement.



WISKA UK Ltd

Unit 7 Hurling Way
St Columb Major Business Park
St Columb Major, Cornwall
TR9 6SX

 +44-(0)1208 816062

 +44-(0)1208 816708

info@wiska.co.uk

www.wiska.co.uk