


Screw connectors and terminals

By means the enclosed special washers for Elpress screw terminals, two bolt dimensions may be used in one palm hole size, see picture and table below. The required stocking of different terminals for different bolts is hereby heavily reduced.

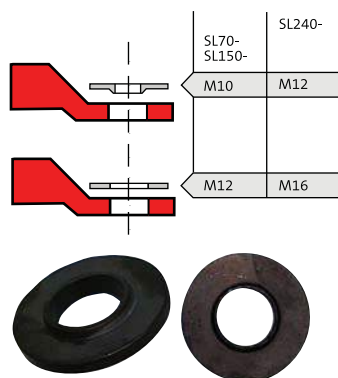

Special washers for Elpress screw terminals.

Stranded and solid conductors area, mm ²	Type	Connector Cat.no.	Terminal M12, M10	Terminal M16, M12
10	round	SC50R50S	SL70R70S-10-12	
16	round sector	SC50R50S SC50R50S	SL70R70S-10-12	
25	round sector	SC50R50S SC50R50S	SL70R70S-10-12 SL70R70S-10-12	
35	round sector	SC50R50S SC50R50S	SL70R70S-10-12 SL70R70S-10-12	
50	round round sector sector	SC50R50S SC95R95S SC50R50S SC95R95S	SL70R70S-10-12 SL70R70S-10-12	
70	round sector sector	SC95R95S SC95R95S SC150	SL70R70S-10-12 SL70R70S-10-12	
95	round round sector sector sector	SC150R95S SC95R95S SC150R95S SC95R95S SC150	SL150R95S-10-12 SL150R95S-10-12	
120	round sector sector sector	SC150R95S SC240R185S SC150 SC240	SL150R95S-10-12	SL240R185S-12-16
150	round sector sector sector	SC150R95S SC240R185S SC150 SC240	SL150R95S-10-12	SL240R185S-12-16
185	round sector sector	SC240R185S SC240R185S SC240		SL240R185S-12-16 SL240R185S-12-16
240	round sector sector	SC240R185S SC400R240S SC240		SL240R185S-12-16 SL240R240S*
300	round	SC400R240S ¹⁾		SL400R240S ¹⁾
400	round	SC400R240S ¹⁾		SL400R240S ¹⁾
500	round	SC630R		SL630R*
630	round	SC630R		SL630R*

* Palm hole as requested

1) for un-compressed cable. For compressed cable, contact Elpress.