

Your representation:

etech
components

All Enquiries:
tel: +44 (0)1744 762 929
email: sales@etechcomponents.com
web: www.etechcomponents.com


FIPLOCK®

FEVS

Wellrohr, Standardausführung
Corrugated conduit, standard version

+55 °C

-40 °C

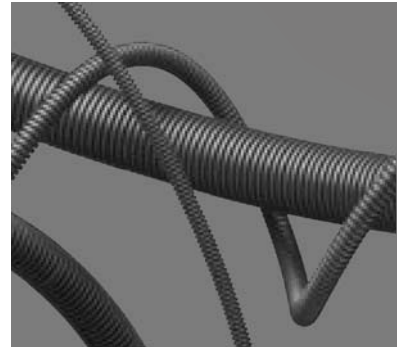

Material: EVA

Das FEVS Wellrohr aus Ethylene vinyl acetate (EVA), eignet sich für vielseitige Kabelschutzanwendungen. Der „Allrounder“ ist selbstverlöschend, halogen- sowie cadmiumfrei. Mit ausgezeichneter Schlagzähigkeit, Druckfestigkeit und guter Flexibilität erfüllt dieses Wellrohr anspruchsvolle technische Anforderungen für Anwendungen im Maschinen-, Apparate- und Installationsbau.

Material: EVA

The corrugated conduit FEVS is made of Ethylene vinyl acetate (EVA) and is suitable for various cable protection applications. The "allrounder" is self-extinguishing and free of halogen and cadmium. Excellent impact resistance, compression strength and good flexibility qualify the product for demanding applications in machine building, installation and construction industries.



Artikel-Nr. <i>Part No.</i>		Nennweite <i>Nominal width</i>	Profil <i>Profile</i>	Dimensionen in mm (nom.) <i>Dimensions in mm (nom.)</i>		Biegeradius in mm <i>Bending radius in mm</i>	VPE <i>PU</i>
schwarz / black	grau / grey	NW		ID	AD / OD	stat. R.	m
FEVSF-07B.50	FEVSF-07G.50	07	F	6,6	9,9	20	50
FEVSF-10B.50	FEVSF-10G.50	10	F	9,7	12,8	25	50
FEVSF-12B.50	FEVSF-12G.50	12	F	11,5	15,6	30	50
FEVSF-17B.50	FEVSF-17G.50	17	F	16,1	20,8	45	50
FEVSF-23B.50	FEVSF-23G.50	23	F	22,5	28,0	65	50
FEVSF-29B.50	FEVSF-29G.50	29	F	28,5	33,8	80	50
FEVSF-36B.25	FEVSF-36G.25	36	F	33,3	41,5	105	25
FEVSF-48B.25	FEVSF-48G.25	48	F	47,0	53,5	140	25

Andere Farben, Ring- und Stücklängen auf Anfrage erhältlich. / Other colors, lengths of coils and lengths of pieces are available on request.

