

Your representation:

etech
components

All Enquiries:
tel: +44 (0)1744 762 929
email: sales@etechcomponents.com
web: www.etechcomponents.com


FIPLOCK®

HPAC

+105 °C
-50 °C



Wellrohr, schwere Ausführung Corrugated conduit, heavy version

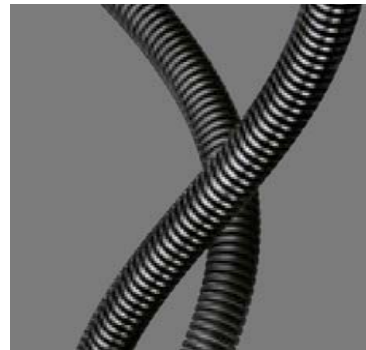

	min.	max.
Temperaturbereich Temperature range	■	■
Flexibilität/Biegesteifigkeit Flexibility/Ductility	■	■
Dynamik Dynamic	■	■
Mechanischer Schutz Mechanical protection	■	■
Brandverhalten Fire precaution performance	■	■
Chemische Beständigkeit Chemical resistance	■	■
Witterungsbeständigkeit Resistance to weathering	■	■

Material: PA6 MOD BS C

Das Wellrohr HPAC aus hochwertigem, speziell formuliertem Polyamid 6, bietet auch bei tiefen Temperaturen und Trockenheit hervorragende mechanische Eigenschaften. Dieser Rohrtyp eignet sich besonders für die statische und gelegentlich bewegte Verlegung von Kabeln und Leitern an Orten, an denen erhöhte Schlag- und Druckbeanspruchungen zu erwarten sind. Selbstverlöschend, halogen- sowie cadmiumfrei bietet HPAC entscheidende Vorteile für anspruchsvolle technische Anforderungen.

Material: PA6 MOD BS C

The HPAC conduit type made of specially modified polyamide 6, provides very good mechanical strength regarding physical impacts especially in cold and dry environments. This conduit type specially suits for static and frequently flexing applications exposed to heavy impact and compression forces. The self-extinguishing material quality allows applications with demanding requirements.



Artikel-Nr. Part No.	Nennweite Nominal width		Profil Profile	Dimensionen in mm (nom.) Dimensions in mm (nom.)		Biegeradius in mm Bending radius in mm		VPE PU
	NW	metr.		ID	AD / OD	stat. R.	m	
HPACF-07B.50	07	10	F	6,2	10,0	15	50	
HPACF-10B.50	10	12	F	9,6	12,8	20	50	
HPACF-12B.50	12	16	F	12,0	15,7	30	50	
HPACC-17B.50	17	20	C	16,1	21,1	35	50	
HPACC-23B.50	23	25	C	22,0	28,5	40	50	
HPACC-29B.50	29	32	C	28,3	34,7	50	50	
HPACC-36B.25	36	40	C	35,8	42,3	60	25	
HPACC-48B.25	48	50	C	46,7	54,2	70	25	

Andere Farben, Ring- und Stücklängen auf Anfrage erhältlich. / Other colors, lengths of coils and lengths of pieces are available on request.

