



Legend™ LSZH Ladder Heatshrink

Legend™ LSZH Heatshrink is manufactured to offer a consistently high grade heatshrink solution.

The key benefit of the Legend™ Ladder Heatshrink is the ladder-style function that enables the user to easily remove the required markers from the carrier while the structure remains

Print in conjunction with our DTP-1/300 Plug'N'Play thermal printer with the same ribbon as all our other thermal labels.

TESTING

Test	Method
Flame retardant	UL224
Oxygen Index & Flue Gas Density	EN 45545-2
Resistance to Solvents	MIL-STD-202-215 w/change 1

TECHNICAL DATA

Printing method:	DTP-1 Printer
Thermal Ribbon:	TSR3
Material:	Polyolefin
Shrink Ratio:	2-1
Min. shrink temp:	115°C
Operating temp:	-40°C up to 105°
Dielectric Strength:	≥ 20 kV/mm
RoHS:	Yes
Reach:	Yes






Legend™ LSZH Ladder Heatshrink

Additional Information

Use with Silver Fox Labacus® Innovator Basic, Advanced or Professional software. Print in conjunction with our Fox-in-a-Box® Plug'N'Play thermal printer using the same ribbon as all our other thermal labels.

ORDER INFORMATION

Product Code	Cable ID Ø	Cable ID Ø	Labels	Pack Qty	Colour
	Exp. (mm)	Rec. (mm)	per Roll		
LHLZ/C/L50/2.4-1.2T(PF)	2.4	1.2	2250	1 Roll	○ ●
LHLZ/C/L50/3.2-1.6T(PF)	3.2	1.6	1800	1 Roll	○ ●
LHLZ/C/L50/4.8-2.4T(PF)	4.8	2.4	1500	1 Roll	○ ●
LHLZ/C/L50/6.4-3.2T(PF)	6.4	3.2	1100	1 Roll	○ ●
LHLZ/C/L50/9.5-4.8T(PF)	9.5	4.8	800	1 Roll	○ ●
LHLZ/C/L50/12.7-6.4T(PF)	12.7	6.4	600	1 Roll	○ ●
LHLZ/C/L50/19.1-9.5T(PF)	19.1	9.5	400	1 Roll	○ ●
LHLZ/C/L50/25.4-12.7T(PF)	25.4	12.7	275	1 Roll	○ ●
LHLZ/C/L50/38.1-19.1T(PF)	38.1	19.1	200	1 Roll	○ ●

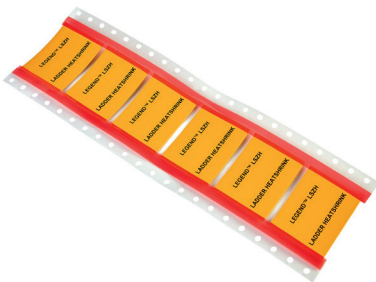

STORAGE INSTRUCTIONS

Storage Instructions	Store between 50°F (10°C) and 77°F (25°C)
Conditions	Keep in dark conditions
Humidity Resistance	35% to 65% RH

Disclaimer: The information contained in this datasheet is based on data we believe to be reliable and is given for information only and without guarantee and does not constitute a warranty. We are not able to anticipate every set of conditions, so always suggest that users should also satisfy themselves as to the suitability of our products for their particular environment and application and not make any assumptions based on information in this data sheet that is included or omitted. This datasheet supersedes any previous information/datasheet released and is subject to change without notice.