

# AQUA CONNECTOR PROCEDURE

The AQUA Connector can be used to connect EFLEX Square or EFLEX Round to plastic or concrete access chambers/catchpits. The connector requires no tools and can be installed in less than 2 minutes.

PLEASE NOTE: EFLEX Square must be converted to EFLEX round before using the AQUA Connector.



- 1 Cut a hole in the chamber/catchpit according to the table below:

AQUA Connector part No.	Min-max diameter of hole	Recommend size of hole
<b>FOKC-30</b>	42~50	45
<b>FOKC-40</b>	58~65	60
<b>FOKC-50</b>	68~75	70
<b>FOKC-65</b>	89~96	90
<b>FOKC-80</b>	106~112	110
<b>FOKC-100</b>	135~141	135

2 Screw the AQUA-Nut onto EFLEX Round (or converter to EFELX Round).



3 Insert EFLEX into the chamber/catchpit wall.




4 From inside the chamber/catchpit, screw the AQUA-Mouth into EFLEX Round.



5 Hand-tighten the AQUA-Nut to the outside of the chamber/catchpit wall.



6 Please follow the 't' reference value in the below table when hand-tightening the AQUA Connector:

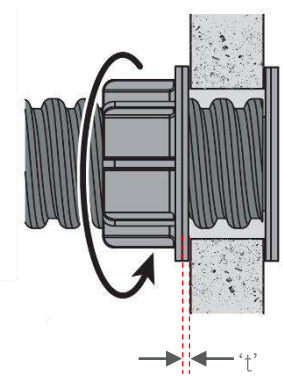

AQUA Connector part No.	Reference value 't'
FOKC-30	Approx. 6mm
FOKC-40~80	Approx. 7mm
FOKC-100	Approx. 8mm

NOTE  
 - The converter to EFLEX Round must be connected to EFLEX Square before using the AQUA Connector

