


Bare Copper Tapes

Wallis high conductivity bare copper tape is used on both lightning protection and earthing applications. It is annealed for ease of use and has radiused edges.

All our standard bare copper tapes are marked 'Wallis U.K. - BS EN 13601'. Other naming requirements can be requested. Additional costs might be incurred.

132

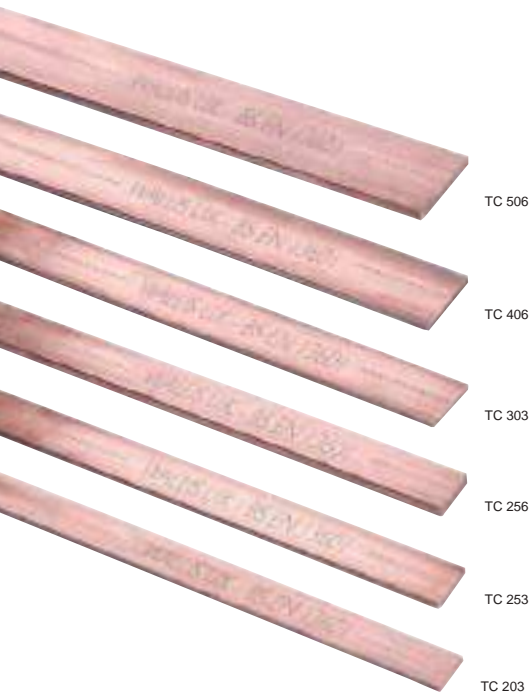

Size W x H mm	C.S.A. mm ²	Weight per Metre kg	Standard Coil Size m	Part Number
12.5 x 1.5	18.75	0.17	100	TC 121
12.5 x 3	37.5	0.33	100	TC 123
20 x 1.5	30	0.27	100	TC 201
20 x 3	60	0.54	100	TC 203
20 x 4	80	0.71	70	TC 204
20 x 5	100	0.89	60	TC 205
25 x 1.5	37.5	0.33	100	TC 251
25 x 2	50	0.45	50	TC 252
25 x 2.5	62.5	0.56	90	TC 2525
25 x 3	75	0.67	25 & 50	TC 253
25 x 4	100	0.89	50	TC 254
25 x 5	125	1.12	40	TC 255
25 x 6	150	1.34	40	TC 256
30 x 2	60	0.54	50	TC 302
30 x 3	90	0.80	50	TC 303
30 x 3.5	105	0.94	50	TC 3035
30 x 4	120	1.07	40	TC 304
30 x 5	150	1.34	40	TC 305
30 x 10	300	2.68	20	TC 3010
31 x 3	93	0.83	50	TC 313
31.5 x 1.8	56.7	0.51	100	TC 31518
31.5 x 4	126	1.12	40	TC 3154
31 x 6	186	1.66	30	TC 316
32 x 6	192	1.71	30	TC 326
35 x 6	210	1.87	25	TC 356
38 x 3	114	1.02	50	TC 383
38 x 5	190	1.69	30	TC 385
38 x 6	228	2.03	25	TC 386
40 x 3	120	1.07	40	TC 403
40 x 4	160	1.43	30	TC 404
40 x 5	200	1.78	25	TC 405
40 x 6	240	2.14	25	TC 406
40 x 6.3	252	2.25	25	TC 4063
40 x 8	320	2.85	20	TC 408
50 x 3	150	1.34	40	TC 503
50 x 4	200	1.78	30	TC 504
50 x 5	250	2.23	20	TC 505
50 x 6	300	2.68	10 & 20	TC 506

Table continues on P133

Bare Copper Tapes (continued)

Size W x H mm	C.S.A. mm ²	Weight per Metre kg	Standard Coil Size m	Part Number
50 x 6.3	315	2.81	20	TC 5063
50 x 7	350	3.12	20	TC 507
50 x 8	400	3.57	20	TC 508
50 x 10	500	4.46	10	TC 5010
50 x 12	600	5.35	10	TC 5012
60 x 5	300	2.68	20	TC 605
60 x 6	360	3.21	15	TC 606
60 x 8	480	4.28	12	TC 608
63 x 10	630	5.62	10	TC 6310
65 x 6	390	3.48	15	TC 656
70 x 6	420	3.75	15	TC 706
75 x 6	450	4.01	7	TC 756
75 x 12	900	8.03	8	TC 7512
80 x 6	480	4.28	12	TC 806

Material: Copper to BS EN 13601 (formerly BS 1432).



BS EN 62561-2

