



# SUNSYNK-L3.0



## DATASHEET

[www.sunsynk.com](http://www.sunsynk.com)  
[sales@sunsynk.com](mailto:sales@sunsynk.com)  
[customerservices@sunsynk.com](mailto:customerservices@sunsynk.com)

v.8 (28/06/24)

 **PLEASE RETAIN FOR  
FUTURE REFERENCE**

Model		SUNSYNK-L3.0
Main Parameter		
Battery Chemistry		Lithium Ferro Phosphate (LifePO4 or LFP)
Capacity		60 Ah
Scalability		Max. 4 pcs in parallel (12kWh)
Nominal Voltage		51.2 V
Operating Voltage		43.2~57.6 V
Energy		3.07 kWh
Usable Energy <sup>[1]</sup>		2.76 kWh
Charge/Discharge Current	Recommend <sup>[2]</sup>	30 A
	Max. <sup>[2]</sup>	60 A
	Peak (2mins,25°C)	75 A
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W/H/D)		440*520*145 mm (don't include Circuit Breaker, terminals and hanging boards)
Weight Approximate		30 kg
Master LED Indicator		5 LED (SOC 20%~100%)
		3 LED (working, alarming, protecting)
IP Rating of Enclosure		IP65
Working Temperature		Charge: 0°C~+55°C (optional heating, -20°C~+55°C) Discharge: -20°C~+55°C
Storage Temperature		-20°C ~ +35°C
Humidity		5% ~ 95%
Altitude		≤2000m
Cycle Life		≥6000 (25±2°C, 90%DOD, 0.5C/0.5C, 70%EOL)
Installation		Wall Mounted (Support 19-inch standard cabinet)
Communication Port		CAN2.0, RS485
Life Cycle Power During Warranty Period <sup>[3]</sup>		10MWh@70%EOL
Certification		IEC62619, CE, UK, CEC, UN38.3
Manufacturer's country		China


<sup>[1]</sup> DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25° C. System usable energy may vary due to system configuration parameters.

<sup>[2]</sup> The current is affected by temperature and SOC.

<sup>[3]</sup> The warranty is due whichever reached first of warranty period or energy throughout.



DC 80A Circuit Breaker

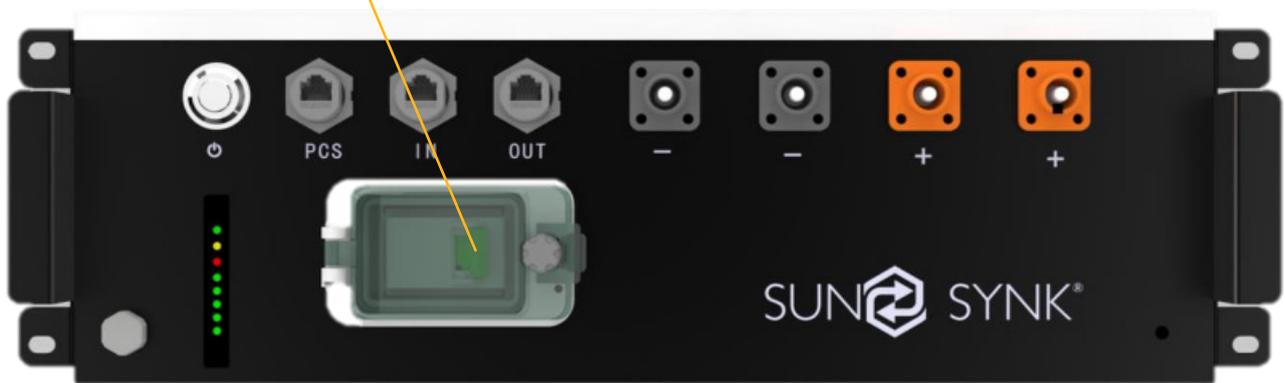



## CONTACT US

**Call us:** +44 151 832 4300 **Email us:** [sales@sunsynk.com](mailto:sales@sunsynk.com)

**HK Address:** Room 702-704, 7/F Texwood Plaza, 6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.

**UK Address:** Sunsynk UK Ltd, 17 Turnstone Business Park, Mulberry Avenue, Widnes, Cheshire, WA8 0WN.

**SA Address:** Globaltech Sunsynk South Africa (Pty) Ltd, Unit 2 Highview Boulevard, Ferndale 2194.

**NL Address:** Sunsynk NL BV, Henri Wijnmalenweg 8, 5657 EP Eindhoven, Netherlands.

GlobalTech Ltd



Powered by  
SUN SYNK



All Enquiries: tel: +44 (0)1744 762 929 | email: [sales@etechcomponents.com](mailto:sales@etechcomponents.com) | web: [www.etechcomponents.com](http://www.etechcomponents.com)